CONTENTS				
TERM CONTRACT: January 1, 2023 through December 31, 2025				
BID ADDENDUM Questions and Answers				
Bid Submission and Pricing Pages				
FLORIDA SCHOOL BUS SPECIFICATIONS, EFFECTIVE JANUARY 2023				
BID AWARD LETTER				
CONTRACTOR'S BID RESPONSE				
COPY OF PERFORMANCE BOND				
ITB #2023-02				

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT

# **CONTRACT 2023-02 ATTACHMENT '6'**

THIS CONTRACT FOR TYPE A, TYPE C AND TYPE D SCHOOL BUSES AND OPTIONAL EQUIPMENT, BID NO: ITB 2023-02, by and between the department, 325 West Gaines, Suite 834, Tallahassee, Florida 32399-0400, and

Sun State International Trucks, LLC , the contractor, a for-profit corporation registered in Florida, each referred to herein as "Party," and collectively referred to as the "Parties,"

#### WITNESSETH:

WHEREAS, the Department desires to provide eligible users, defined herein, with various Type A, Type C and Type D School Buses and Optional Equipment (defined herein as "Vehicles"), through the use of a state term contract pursuant to rule 60A-1.001, F.A.C.; and section 1006.27, F.S., and

WHEREAS, the Department solicited responses to an Invitation to Bid No: ITB 2023-02(ITB) to prospective contractors of said Vehicles; and

WHEREAS, the contractor responded to the ITB and desires to provide said Vehicles; and, unto each other; NOW THEREFORE, in consideration of the premises, terms and conditions set forth herein, the Parties execute this contract so same becomes binding and enforceable by and through the Parties and their assigns, and agree heretofore:

#### **SCOPE OF WORK**

The intent of these specifications is to set forth and convey to prospective bidders the general type, character, performance and quality of the Vehicles desired by the Department and school districts. The contractor is authorized to provide Vehicles to any and all eligible users in the State of Florida. The Parties agree that the laws and rules that apply to this contract shall be for those applicable to contracts in excess of Category Two, or \$35,000, as defined in chapter 287.017, F.S.

Pursuant to Section 7.10 of Bid No: ITB 2023-02, the following documents are hereby incorporated by reference:

- Department contract
- Any addenda to Bid No: ITB 2023-02
- ITB No: 2023-02
- Award Letter

**DEPARTMENT** 

Contractor's response

**IN WITNESS WHEREOF,** the Parties hereto have caused this contract For Type A, Type C and Type D School Buses and Optional Equipment, Bid No: ITB 2023-02, to be executed on the dates shown below their respective signatures.

Signature

Print Name: And Stocks Councilous

Print name: Mike McCullough

Title: Executive Operations Manager

Date: 12/5/22

Date: 10/18/2022

CONTRACTOR

#### FLORIDA DEPARTMENT OF EDUCATION

# BUREAU OF CONTRACTS, GRANTS AND PROCUREMENT MANAGEMENT SERVICES 325 West Gaines Street 332 Turlington Building Tallahassee, Florida 32399-0400

Addendum #1 September 2, 2022

**BID NO.: ITB 2023-02** 

This addendum is being issued to provide the Answers to Questions submitted timely by vendors during the Question and Answers period.

Please be advised all questions are keyed as submitted.

#### <u>From: Chris Rustman</u>

#### Florida Transportation Systems, Inc.

- 1) In regards to ITB-02378, was attachment 11 supposed to be included with the vendor ITB? Attachment 11 is titled "Florida School Bus Specifications, Effective January 2023" and historically has accompanied the initial ITB document.
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.

# From: Mike McCullough Sun State International

- 2) When can bidders expect to receive Attachment 11, Florida School Bus Specifications, Effective January 2023? Was not included with the posted ITB?
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.

# From: Bryant Sanchez GreenPower Motor Co.

- 3) My name is Bryant Sanchez from GreenPower Motor Company here in Rancho Cucamonga, California. I was reading through the bid sheet for bid ITB-02378 and in section 7.25 "Alternative Fuel Engine Option", the language suggests that this bid is open to bids for natural gas, electric, hybrid, and fuel cell vehicles, but the last sentence says "Optional alternative fuel configurations *may not* be offered in lieu of the required base diesel engine configuration as described on page II-2 of the Florida School Bus Specifications, Effective January 2023." This leads me to ask, is this bid open to battery-powered electric vehicles?
  - Florida School Bus Specifications require an in-line six-cylinder diesel engine with a parent bore or wet sleeve block design with a minimum displacement of 6.4 cubic

liters be available as a base engine configuration. Optional configurations including electric may be offered as Additional Engine Options.

## From: Bryant Sanchez GreenPower Motor Co.

- 4) I am writing to follow up on this question as well as another that I have, the bid packet states that the buses must follow the specifications stated in Attachment 11 Florida School Bus Specifications, Effective January 2023, but that page is blank. Where would I be able to find the specifications that this bid is requesting?
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.

## From: Bryant Sanchez GreenPower Motor Co.

- 5) On the pricing spreadsheet, tab titled "Base Bus Comparison School," under Type A, please define what is meant by "18 capacity lift?" Does this mean 18 passengers + 1 wheelchair position and a wheelchair lift?
  - The number 18 is the maximum design capacity also known as the shell capacity. Maximum Design Capacity is the maximum number of passengers the bus (body shell size) can carry; based on 12.8 inch minimum seat width per passenger (a standard 39" seat has three seating positions) with the minimum knee room (seat spacing) required under (Federal Motor Vehicle Safety Standard (FMVSS) No.222 without a wheelchair lift or wheel chair positions.
  - The standard number of wheelchair positions for the Type A 18 Capacity Lift bus is one. The number of each 12.8 inch wide seating position that is reduced to accommodate each wheelchair position, and the wheelchair lift itself are subtracted from the maximum design capacity to provide the equipped capacity, which is the actual passenger capacity as equipped by the manufacturer.
  - An example of a Type A, 18 Capacity bus with a lift could be: Equipped Capacity 6 + 1 WC," meaning 6 regular passenger seating positions plus 1 wheelchair position.

# From: Bryant Sanchez GreenPower Motor Co.

- 6) On the pricing spreadsheet, tab titled "Base Bus Comparison School," under Type D, please define what is meant by " 83 capacity lift?" Does this mean 83 passengers + 1 wheelchair position and a wheelchair lift?
  - The number 83 is the maximum design capacity also known as the shell capacity.
     Maximum Design Capacity is the maximum number of passengers the bus (body shell size) can carry; based on 12.8 inch minimum seat width per passenger (a standard 39" seat has three seating positions) with the minimum knee room (seat spacing) required under FMVSS No.222 without a wheelchair lift or wheel chair positions.

- The standard number of wheelchair positions for the Type D 83 Capacity lift bus is three. The number of each 12.8 inch wide seating position that is reduced to accommodate each wheelchair position, and the wheelchair lift itself are subtracted from the maximum design capacity to provide the equipped capacity, which is the actual passenger capacity as equipped by the manufacturer.
- An example of a Type d, 83 Capacity bus with a lift could be: Equipped Capacity 57 + 3 WC," meaning 57 regular passenger seating positions plus 3 wheelchair positions.

# From: Bryant Sanchez GreenPower Motor Co.

- 7) Same question for the Type D 84 capacity lift, is it 84 passengers + 1 wheelchair position and a wheelchair lift?
  - The number 84 is the maximum design capacity also known as the shell capacity. Maximum Design Capacity is the maximum number of passengers the bus (body shell size) can carry; based on 12.8 inch minimum seat width per passenger (a standard 39" seat has three seating positions) with the minimum knee room (seat spacing) required under FMVSS No.222 without a wheelchair lift or wheel chair positions.
  - The standard number of wheelchair positions for the Type D 84 Capacity lift bus is three. The number of each 12.8 inch wide seating position that is reduced to accommodate each wheelchair position, and the wheelchair lift itself are subtracted from the maximum design capacity to provide the equipped capacity, which is the actual passenger capacity as equipped by the manufacturer.
  - An example of a Type D, 84 Capacity bus with a lift could be: Equipped Capacity 48 + 3 WC," meaning 48 regular passenger seating positions plus 3 wheelchair positions.

# From: Bryant Sanchez GreenPower Motor Co.

- 8) Please confirm whether we are required to provide pricing for all options listed on the pricing spreadsheet or if it is acceptable to only provide pricing for some of those options.
  - All optional equipment being made available for purchase through this bid must include pricing.

# From: Bryant Sanchez GreenPower Motor Co.

9) Regarding the License to conduct services in the state of Florida, GreenPower Motor Company does have a Certificate of Authority in the state of Florida. Would this be acceptable as a license or would it be required of us to obtain a Florida Business License?

 This all depends on the particular activity that will be conducted in Florida under the terms of your proposal. Bidders should consult with their legal counsel or otherwise check county and municipal regulations.

## From: Bryant Sanchez GreenPower Motor Co.

10) Let me rephrase my questions: On the pricing sheet, on the tab titled "Base Bus Comparison - School," please confirm that "18 capacity lift" for Type A buses means 18 passenger seats + 1 wheelchair position, and "83 capacity lift" for type D buses means 83 passenger seats + 3 wheelchair positions.

- The numbers 18 and 83 are the maximum design capacities also known as the shell capacity. Maximum Design Capacity is the maximum number of passengers the bus (body shell size) can carry; based on 12.8 inch minimum seat width per passenger (a standard 39" seat has three seating positions) with the minimum knee room (seat spacing) required under FMVSS No.222 without a wheelchair lift or wheel chair positions.
- The standard number of wheelchair positions for the Type A 18 Capacity Lift bus is one. The standard number of wheelchair positions for the Type D 83 Capacity lift bus is three. The number of each 12.8 inch wide seating position that is reduced to accommodate each wheelchair position, and the wheelchair lift itself are subtracted from the maximum design capacity to provide the equipped capacity, which is the actual passenger capacity as equipped by the manufacturer.
- An example of a Type A, 18 Capacity bus with a lift could be: Equipped Capacity 6 + 1 WC," meaning 6 regular passenger seating positions plus 1 wheelchair position.

# From: Bryant Sanchez GreenPower Motor Co.

11) Section 7.21 on page 29 of the ITB document states that "WLB seating capacity shall be based on the maximum regular student seating that can be accommodated with the standard three wheelchair spaces per bus."

Does this mean that 3 wheelchair spaces are required on each WLB layout for all school bus types?

No. See information below

- The standard number of wheelchair positions for all Type A WLBs is one.
- The standard number of wheelchair positions for all Types C and D WLBs is three.

#### **BODY DATA PLATE:**

A durable data plate must be mounted inside the body in a clearly visible location. The body data plate information must include a listing of the "Maximum Design Capacity" and the "Equipped Capacity" of the body. Maximum Design Capacity must be the maximum number of passengers the bus (body shell size) can carry, based on 12.8 inches minimum seat width per passenger, with the minimum knee room (seat spacing) permitted by FMVSS No. 222. Equipped Capacity must be the actual passenger capacity of the finished body, as equipped by the manufacturer, based on the number of total passengers

the installed bench seats are designed to carry, and the number of wheelchair positions installed.

An example of the format to be used for Equipped Capacity is "28 + 3 WC," meaning 28 standard passenger seats plus 3 wheelchair positions.

#### From: Chris Rustman

## Florida Transportation Systems, Inc.

12) Page 6, Section 3.0 states that the contract is anticipated to begin on January 1, 2023 and be effective for 36 months. Would the department consider a shorter-term (12 month) contract to minimize the economic impact on bidders from inflation and supplier shortages?

No

#### From: Chris Rustman

#### Florida Transportation Systems, Inc.

- 13) Page 6, Section 3.0 lists the intent of the contract and the included PPI formula for annual price adjustments on the base model vehicle. Will the department also apply the annual price adjustments to the optional equipment, video systems and air conditioning options as well?
  - No. The annual price adjustment does not apply to optional equipment. Optional equipment pricing has no bearing on the evaluation of this bid. However, the awarded bidder(s) will be allowed to submit an updated list of optional equipment and pricing on or before January 15<sup>th</sup> of each subsequent contract year after the first 12 months of the contract. The updated list of optional equipment and pricing will become effective on February 1 of each subsequent contract year.

#### From: Chris Rustman

#### Florida Transportation Systems, Inc.

14) Page 6, Section 3.0 lists the included PPI model for adjustments, but it also references a price decrease. Is there potential for a price reduction during the term of the contract?

 The price adjustment formula is based on the PPI and can result in an increase or a decrease depending whether the PPI index rises or falls.

#### From: Chris Rustman

# Florida Transportation Systems, Inc.

- 15) Page 7, Section 3.0 states that the contract may be renewed for up to 3, one year terms. Are the one-year renewals initiated after the initial 36 month period? And, are the renewal contracts subject to mutual agreement?
  - The initial contract is for 36 months and may be renewed for up to three, one-year terms if mutually agreed upon by both parties.

#### From: Chris Rustman

#### Florida Transportation Systems, Inc.

- 16) Page 22, Section 6.2 defines the potential liquidated damages for delayed delivery. With the current and ongoing parts and supplier shortages affecting our industry along with extended lead times, will the Department consider adjusting or eliminating this requirement?
  - The current language includes the delivery timeline adjustment of an additional 125 days to 365 days in comparison to previous contracts with a 240 day timeline. Please see 7.17 TIMELINES below:
  - Note: The language in 6.2 Financial Consequences under 6.2a. Calculation of liquidated damages states that "circumstances beyond the company's control are not cause for liquidated damages."

#### • 7.17 TIMELINES

Purchase orders will be accepted from January 1, 2023, through December 31, 2025. The required delivery date will be 365 days from the date the bidder or bidder's representative(s) receive the purchaser's electronic purchase order notification. (Electric school buses are excluded from this delivery schedule requirement. However, school districts may negotiate a delivery schedule for electric school buses on an individual basis).

## From: Chris Rustman

## Florida Transportation Systems, Inc.

- 17) Page 26, Section 7.12 states that these buses purchased on ITB 2032-02 may be subject to a MyFloridaMarketPlace fee. What is that fee currently and will that fee be assessed on every order purchased on ITB 2023-02?
  - Only transactions processed through MyFloridaMarketplace are subject to the 1
    percent fee. Currently no school districts pay invoices through MFMP with the
    exception of Florida School for the Deaf and the Blind.

## From: Chris Rustman

# Florida Transportation Systems, Inc.

- 18) Attachment 11, Florida School Bus Specifications, Effective January 2023, is referenced throughout the bid template. Will the Department be providing that document to bidders? Also, if this document is to be provided by the Department, will bidders have an opportunity to ask technical questions regarding these specifications as stated in section 4.2?
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.
  - Additional questions may be submitted to Anita Wimberly via email at <u>Anita.Wimberly@fldoe.org</u> on or before September 19, 2022. The department's response will be posted to the VIP on or before September 23, 2022.

# From: Mike McCullough Sun State International

- 19) While it is our intention to continue to design and manufacture buses that meet all aspects of Florida School Bus Specifications, new technologies will be coming within the 3 year term of the ITB. These changes may require some clarification and/or exceptions to current specifications. One such item is steering column mounted shifter/gear selector to provide better driver ergonomics and reduced maintenance. Will the Department allow a column mounted shifter/gear selector in lieu of the currently required dash mounted, T handle type?
  - The department may, at its discretion, grant variances or exemptions and issue clarifications of specifications, as necessary, to provide safe, efficient and costeffective equipment to Florida school districts and charter schools and provide for advances in technology. New technology and equipment are acceptable for use if:
    - 1. Items do not compromise the effectiveness or integrity of any major safety system.
    - o 2. Items do not diminish the safety of the bus interior.
    - 3. Items do not create additional risk to students who are boarding or exiting the bus or are in or near the school bus loading zone.
    - 4. Items do not require undue additional activity and/or responsibility for the driver.
    - 5. Items generally increase efficiency and/or safety of the bus, provide for a safer or more pleasant experience for the occupants and pedestrians in the vicinity of the bus, and/or assist the driver by making his or her tasks easier to perform.

# From: Mike McCullough Sun State International

- 20) Attachment 11, Florida School Bus Specifications, Effective January 2023 were not included in the ITB posting. When can vendors expect to receive or have access these Specifications?
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.

# From: Claire Garcia

# Lion Electric Co. USA Inc.

- 21) On page 2 of the ITB, it states that bid responses must be mailed or delivered to: Florida Department of Education, Bureau of Contracts, Grants and Procurement Management Services, 325 West Gaines Street, 344 Turlington Building, Tallahassee, Florida 32399-0400, Attention: Anita Wimberly. But on page 9 of the ITB, it states that bid responses must be mailed or delivered to: Florida Department of Education, Procurement Office, Attn: Anita Wimberly, 325 West Gaines Street, 332 Turlington Building, Tallahassee, Florida 32399-0400. These two addresses are slightly different. Which one should bid responses be mailed/delivered to?
  - The bid should be delivered to 325 West Gaines Street, 344 Turlington Building, Tallahassee, Florida 32399-0400

# From: Mike McCullough Sun State International

- 19) While it is our intention to continue to design and manufacture buses that meet all aspects of Florida School Bus Specifications, new technologies will be coming within the 3 year term of the ITB. These changes may require some clarification and/or exceptions to current specifications. One such item is steering column mounted shifter/gear selector to provide better driver ergonomics and reduced maintenance. Will the Department allow a column mounted shifter/gear selector in lieu of the currently required dash mounted, T handle type?
  - The department may, at its discretion, grant variances or exemptions and issue clarifications of specifications, as necessary, to provide safe, efficient and costeffective equipment to Florida school districts and charter schools and provide for advances in technology. New technology and equipment are acceptable for use if:
    - 1. Items do not compromise the effectiveness or integrity of any major safety system.
    - o 2. Items do not diminish the safety of the bus interior.
    - 3. Items do not create additional risk to students who are boarding or exiting the bus or are in or near the school bus loading zone.
    - 4. Items do not require undue additional activity and/or responsibility for the driver.
    - 5. Items generally increase efficiency and/or safety of the bus, provide for a safer or more pleasant experience for the occupants and pedestrians in the vicinity of the bus, and/or assist the driver by making his or her tasks easier to perform.

# From: Mike McCullough Sun State International

- 20) Attachment 11, Florida School Bus Specifications, Effective January 2023 were not included in the ITB posting. When can vendors expect to receive or have access these Specifications?
  - The Florida School Bus Specifications, Effective January 2023 will be provided with this response.

# From: Claire Garcia

# Lion Electric Co. USA Inc.

- 21) On page 2 of the ITB, it states that bid responses must be mailed or delivered to: Florida Department of Education, Bureau of Contracts, Grants and Procurement Management Services, 325 West Gaines Street, 344 Turlington Building, Tallahassee, Florida 32399-0400, Attention: Anita Wimberly. But on page 9 of the ITB, it states that bid responses must be mailed or delivered to: Florida Department of Education, Procurement Office, Attn: Anita Wimberly, 325 West Gaines Street, 332 Turlington Building, Tallahassee, Florida 32399-0400. These two addresses are slightly different. Which one should bid responses be mailed/delivered to?
  - The bid should be delivered to 325 West Gaines Street, 344 Turlington Building, Tallahassee, Florida 32399-0400

#### Lion Electric Co. USA Inc.

22) Page 13 of the ITB states, "These worksheets [Pricing Worksheets] should be uploaded to the Vendor Information Portal (VIP) Advertisement Website — MyFloridaMarket Place Vendor Information Portal to the Procurement Agent listed in Section 4.0." Should the worksheets be uploaded to the VIP, sent to the Procurement Agent, or both?

• The bidder should submit one original hard copy and one electronic copy of the complete bid response, including the pricing sheets. Please disregard the request to upload the bid submission documents to the My Florida Market Place Vendor Information Portal, as described on page 13 of the ITB. Bid submissions must be received no later than 9:15 a.m. on October 19, 2022, at:

Florida Department of Education Procurement Office Attn: Anita Wimberly 325 West Gaines Street 344 Turlington Building Tallahassee, Florida 32399-0400

From: Claire Garcia Lion Electric Co. USA Inc.

23) Page 17 of the ITB states, "ALTERNATE BRANDS OR PRODUCTS WILL NOT BE CONSIDERED FOR THIS BID RESPONSE." Does this mean that compatible equivalents will not be considered?

• Compatible equivalents will not be considered. Bid as specified in the attached Florida School Bus Specifications, Effective January 2023.

From: Claire Garcia Lion Electric Co. USA Inc.

24) Page 21 of the ITB states, "Bidders submitting Bids to this solicitation should provide electronic and information technology resources in complete compliance with the accessibility standards required by Section 282.601-282.606, F.S., and Rule 60-8.002, F.A.C." What "electronic and information technology resources" are required to be submitted with a bid response?

The resources need to include that all aspects or any elements are within the scope
of the rule. Any equipment, including electronic equipment, are accessible for
individuals with disabilities and are compliant with the rule.

#### Lion Electric Co. USA Inc.

25) Page 25 of the ITB states, "The successful bidder is responsible for providing a pilot model of each size and type bus awarded for inspection by representatives of the STMS." How long after awards are announced does the successful bidder have until they must provide a pilot model of each size and type bus awarded?

• As described in section 4.21 QUALIFICATIONS: Manufacturers, distributors or dealers must meet the certification requirements described in rule 6A-3.003, Florida Administrative Code (F.A.C.) to participate in this ITB. Before any manufacturer, distributor or dealer may offer for sale or lease any school bus chassis or bodies to be used for the transportation of students to public schools of Florida, such manufacturer, distributor or dealer must file with the Deputy Commissioner for Finance and Operations a certified statement that any school bus chassis or body sold will meet all requirements as described in rule 6A-3.003, F.A.C., and submit to the deputy commissioner or their authorized representative upon request, for the purpose of examination, a demonstrator model of each type of chassis or body model to be offered for sale to ascertain whether each model meets specifications and quality standards required by the State Board of Education. To date, these requirements have not been met by your company.

# From: Claire Garcia

### Lion Electric Co. USA Inc.

26) Page 30 of the ITB states, "The successful bidder of Type C and D units built by the same manufacturer as a complete unit (chassis and body) shall supply a single MCO." When is this single MCO required to be provided?

• The MCO must be provided at the time of delivery pursuant to section 319.21, Florida Statutes.

# From: Claire Garcia

# Lion Electric Co. USA Inc.

27) Should bidders fill out Attachment 6 and include a completed copy with their bid response, or just include a copy of the template provided for this Attachment?

Attachment 6 is not to be returned with the bid submission.

# From: Claire Garcia

## Lion Electric Co. USA Inc.

28) What "comments regarding production schedules and remarks" should be included in Attachment 7?

• This space is provided for bidder comments to convey production schedule information.

#### Lion Electric Co. USA Inc.

- 29) Should bidders include the provided examples forms for Attachment 9 and Attachment 10 with their bid response without making any changes to those forms?
  - Attachments 9 and 10 may not be altered and must be returned to acknowledge the required file structure for status reports and pre-delivery inspections.

From: Claire Garcia

#### Lion Electric Co. USA Inc.

- 30) Should bidders include a copy of Florida School Bus Specifications, Effective January 2023 with their bid response?
  - Yes.

From: Claire Garcia

#### Lion Electric Co. USA Inc.

- 31) In what format should bidders provide their Pre-Delivery Program for Attachment 18? In other words, can it be provided as a Word Document, PDF, etc.?
  - PDF is preferred.

From: Claire Garcia

# Lion Electric Co. USA Inc.

- 32) Should bidders include the entire Terms and Conditions provided in Attachment 20 with their bid response?
  - Yes

From: Claire Garcia

### Lion Electric Co. USA Inc.

- 33) Can bidders provide additional Attachments with their bid response in order to address other requirements outlined in the ITB, such as the "letter to identify necessary experienced personnel and facilities to support the activities associated with this Bid" mentioned in Section 4.21 Qualifications?
  - Yes

From: Claire Garcia

#### Lion Electric Co. USA Inc.

- 34) In the Price Workbook, how should bidders indicate if they are not bidding on a specific configuration?
  - N/B or NB: No bid submitted for base bus or option See section 3.2 for definitions.

#### Lion Electric Co. USA Inc.

35) In Section 7.25 Alternative Fuel Engine Option of ITB, it states that the pricing for electric school buses should be on the optional alternative engine pricing sheet. Is this "optional alternative engine pricing sheet" a separate sheet from the Price Workbook? If so, will it be provided to bidders? If not, do bidders offering electric school buses just provide electric school bus pricing in the original Price Workbook?

 All pricing is submitted via the excel pricing pages workbook that was posted on the Vendor Bid System. There is a tab for optional engine pricing.

# From: Claire Garcia

## Lion Electric Co. USA Inc.

36) In the Price Workbook, how should bidders indicate if an option is included?

• If an option is included with the base bus price, the excel workbook cell for that option would indicate "STD" for standard instead of a price. See section 3.2 for definitions.

### From: Claire Garcia

#### Lion Electric Co. USA Inc.

37) In the Price Workbook, how should bidders indicate if an option is Not Applicable (for example, transmission on an electric school bus)?

N/A or NA for not available or applicable as defined in section 3.2: Definitions.

# From: Glenn Matthews Matthew Bus Alliance, Inc.

#### 3.0 Intent:

38) With an annual price adjustment based on the Producer Price Index (PPI) for commodity series ld: WPU141302 Transportation Equipment-Complete vehicles on purchased chassis, not seasonally adjusted and published by United States Department of Labor, Bureau of Labor Statistics at <a href="https://data.bls.gov/cgi-bin/srgate">https://data.bls.gov/cgi-bin/srgate</a>. The price adjustment (increase/decrease) will be made after the first 12 months of the contract, calculated using the annual index total for the 2022 calendar year as the beginning index point and made effective on February 1 of each subsequent contract year. With the aforementioned increases to take place, will the state automatically be applying the increases, or will the vendor have to request before action is taken?

• The price adjustments will be made automatically without vendor requests.

# <u>From: Glenn Matthews</u> <u>Matthew Bus Alliance, Inc.</u>

#### 3.0 Intent:

- 39) Our manufacturer is requesting the PPI index to WPU1413 Truck and Bus Bodies (relates specifically to school buses), is used as the basis for price adjustment to reflect more accurately what is taking place in the school bus industry vs. WPU11302 Transportation Equipment-Complete vehicles on purchased chassis. Also due to the unpredictability in the marketplace as a result of high demand, labor, and supply chain issues as well as rapid inflation, please make the adjustments quarterly to keep pace with what is actually taking place. Considering this is a proposed 3-year contract with the option to add years, these changes will ensure the contract remains viable to all manufacturers vs. cancellations due to numerous rapid increases like we have seen on ITB: 2020-01 and ITB: 2022-16. NYS OGS successfully advertised and conducted their 5-year school bus bid using these manufacturer's approved methods (See attached pages 42 44).
  - The PPI index will be changed from WPU141302 Transportation Equipment-Complete vehicles on purchased chassis to WPU1413 Truck and Bus Bodies to align more closely with school buses.
  - Price adjustments will be made annually.
  - Attachment provided by Glenn Matthews showing NYS OGS 5-year school bus bid will not be included with this Q&A and not published as part to this addendum. However, these documents will be available through a public records request to the department.

# <u>From: Glenn Matthews</u> <u>Matthew Bus Alliance, Inc.</u> 3.0 Intent:

- 40) Since this is a 3-year bid with possible extensions, is it possible to add engine options as they come available throughout the contract period? We are expecting a new Cummins 2024 engine, which will feature propane, gasoline, CNG, and diesel fuel options. Pricing has yet to be determined and most likely not available until after the bid opening. There may also be upgrades to the EV battery options and technology available. In the best interest of the districts using this contract, there needs to be some mechanism to allow for these types of changes and pricing for said items. Maybe we could use pricing from other competitive bids to substantiate new pricing at such time they are available.
  - Optional equipment pricing has no bearing on the evaluation of this bid. However, the awarded bidder(s) will be allowed to submit an updated list of optional equipment and pricing on or before January 15<sup>th</sup> of each subsequent contract year after the first 12 months of the contract. The updated list of optional equipment and pricing will become effective on February 1 of each subsequent contract year.

# <u>From: Glenn Matthews</u> <u>Matthew Bus Alliance, Inc.</u>

#### 4.34 Alternates:

41) Bid as required per specifications provided in Attachment 11, Florida School Bus Specifications, Effective January 2023.

Attachment 11 is blank. Should we use the 2020 School Bus Specifications for this bid? If specs should change during the 36-month period, and can be renewed 3 more additional years, can adjustments be made for specifications and price increases if any as a result.

- The Florida School Bus Specifications, Effective January 2023 will be provided with this response.
- If the Florida School Bus Specifications are updated during the term of the contracts for ITB 2023-02, the existing contracts will be canceled and a new ITB will be released.

# <u>From: Glenn Matthews</u> <u>Matthew Bus Alliance, Inc.</u>

7.15 Delivery Pricing Adjustments

NOTE: upcharges for alternate fuel vehicle deliveries will not be adjusted

- 42) Why wouldn't alternate fuels be eligible for adjustments? Alternative fuels are also affected by price increases, especially on Flat Bed Trucks, which use diesel fuel to transport the EV buses.
  - The base delivery prices will be adjusted annually as described in 7.15 for all buses including the alternate fuel vehicles to compensate for changes in average national fuel prices. The additional upcharges for alternate fuel vehicles will not be adjusted since these upcharges are added to the base delivery prices.

Potential proposers have 72 hours from posting of addenda to protest the requirements of each addendum. Failure to file a protest within the time prescribed in Section 120.57(3), or failure to post the bond or other security required by law within the time allowed for filing a bond shall constitute a waiver of proceedings under Chapter 120, Florida Statutes.

YOUR BID WILL NOT BE COMPLETE WITHOUT THIS DOCUMENT SIGNED AND INCLUDED!
Company Name: Sun State International Trucks, LLC
Vendor Name – written: Mike McCullough
Authorized Signature: Juil McCu
Mailing Address: 6020 Adamo Dr
City, State & Zip Code: Tampa, FL 33619
Telephone: 813-226-7330E-Mail Address: mike.mccullough@sunstateintl.com

# FLORIDA DEPARTMENT OF EDUCATION

# BUREAU OF CONTRACTS, GRANTS AND PROCUREMENT MANAGEMENT SERVICES 325 West Gaines Street 332 Turlington Building Tallahassee, Florida 32399-0400

Addendum #2 September 19, 2022

**BID NO.: ITB 2023-02** 

This addendum is being issued to provide the Answers to Questions submitted timely by vendors during the Question and Answers period.

Please be advised all questions are keyed as submitted.

From: Claire Garcia Lion Electric Co. USA Inc.

Hi Ms. Wimberly,

I hope this email finds you well. Please find below additional questions from The Lion Electric Co. USA Inc. regarding ITB 2023-02: Type A, Type C and Type D School Buses and Optional Equipment:

- (43) In Addendum 1, FL DOE states that "Florida School Bus Specifications require an in-line six-cylinder diesel engine with a parent bore or wet sleeve block design with a minimum displacement of 6.4 cubic liters be available as a base engine configuration." Does this mean that electric-only OEMs are prohibited from submitting a response to this bid?
  - Bids submitted for electric vehicles only will be rejected, and bids submitted by manufacturers, distributors, dealers or any other representatives that have not met the qualification requirements described in rule 6A-3.003, Florida Administrative Code (F.A.C.) and again in section 4.21 of this ITB will be rejected. To date, your company has not met the qualifications requirements as noted in a January 7, 2021, letter sent to the Lion Electric Company outlining the necessary requirements to certify its school buses to the deputy commissioner of finance and operations for approval to be used for the transportation of public and private school students in the state of Florida.

- (44) If electric-only OEMs are eligible to participate in this bid, will FL DOE accept bid responses that indicate that certain diesel specifications and options do not apply to purpose-built all-electric school buses?
  - To date, no Original Equipment Manufacturers (OEMs) that produce electric-only school buses have met the qualifications requirements outlined in rule 6A-3.003(1)(a) and (b), F.A.C., and section 4.21 of this ITB and are therefore not eligible to participate in this invitation to bid.

# (45) Can electric-only OEMs have an exemption to present only electric school buses for inspection as pilot models?

- No.
- To date, no OEMs that produce electric-only school buses have met the qualifications requirements outlined in rule 6A-3.003(1)(a), and (b), F.A.C., and section 4.21 of this ITB and are therefore not eligible to participate in this invitation to bid. Once the certification requirements have been met, the Commissioner may approve special equipment differing from or not prescribed, in Florida School Bus Specifications for the specific purpose of limited pilot testing to determine if such equipment provides substantive improvements in safety or cost-effectiveness under 6A-3.003(5), F.A.C.
- Any OEM can file with the deputy commissioner for finance and operations a certified statement that any school bus chassis or body sold by such manufacturer, distributor or dealer will meet the Federal Motor Vehicle Safety Standards (FMVSS) required by section 1006.25(2) F.S., the National School Transportation Specifications & Procedures, May 2015 and the Florida School Bus Specifications, effective January 2023, and submit to the deputy commissioner for finance and operations or an authorized representative upon request, for the purpose of examination, a demonstrator model, or parts thereof, of each type of chassis or body model to be offered for sale. Such examination shall be for the purpose of ascertaining whether the respective chassis or body model meets the specifications, including quality standards, required by the State Board of Education. Once an electric-only school bus OEM has completed the certification process, the department may, at its discretion, advertise a new ITB or advertise an electric-only school bus ITB.
- (46) Would FL DOE accept pricing for diesel school buses in the Vendor Bid Sheets, and EV in the Additional Engine Options Pricing tab, based on our previous experience building diesel vehicles that we no longer produce, with the understanding that only an electric school bus will be presented for inspection as a pilot model?
  - No.

# (47) Must the bidder offer every option listed on each price sheet tab?

• Bidders may submit a bid price or N/B or NB for NO BID or any other applicable acronym as defined in section 3.2 DEFINITIONS of the ITB beginning on page 7.

Potential proposers have 72 hours from posting of addenda to protest the requirements of each addendum. Failure to file a protest within the time prescribed in Section 120.57(3), or failure to post the bond or other security required by law within the time allowed for filing a bond shall constitute a waiver of proceedings under Chapter 120, Florida Statutes.

Your	BID	WILL	NOT	BE	COMPLETE	WITHOUT	THIS	DOCUMENT
SIGNE	) AND	INCL	UDED!					

Company Name: Sun State International Trucks, LLC	
Vendor Name – written: Mike McCullough	
Authorized Signature: The miles of the control of t	
Mailing Address: 6020 Adamo Dr	
City, State & Zip Code: Tampa FL 33619	
Telephone: 813-226-7330E-Mail Address: mike.mccullough@sunstateintl.com	

Enter Bid Number 2023-02

Enter Name of Bidder Sun State International , LLC

# **VENDOR BID SHEETS**

BID NO: ITB 2023-02 SCHOOL BUS BASE UNIT AND CONFIGURATION PRICING

Type A							
Type A	18 Capacity	18 Capacity Lift	27 Capacity	27 Capacity Lift	29 Capacity	29 Capacity Lift	
Sun State International, LLC	N/B	N/B	N/B	N/B	N/B	N/B	
		Type C Lighte	r Weight Vers	sion (LT)			
Type C Light	29 Capacity	29 Capacity Lift					
Sun State International , LLC	N/B	N/B					
	Тур	e C Convention	al - 29, 47 and	d 65 Capacity			
Type C	29 Capacity	29 Capacity Lift	47 Capacity	47 Capacity Lift	65 Capacity	65 Capacity Lift	
Sun State International , LLC	\$109,746	\$115,270	\$112,094	\$117,493	\$115,500	\$120,708	
	Т	ype C Convention	onal - 71 and	77 Capacity			
Type C	71 Capacity	71 Capacity Lift	77 Capacity	77 Capacity Lift			
Sun State International , LLC	\$116,802	\$122,008	\$117,985	\$123,022			
	Тур	oe D Front Engir	ne - 71, 77 and	d 83 Capacity			
Type D Front Engine (FE)	71 Capacity	71 Capacity Lift	77 Capacity	77 Capacity Lift	83 Capacity	83 Capacity Lift	89 Capacity
Sun State International , LLC	N/B	N/B	N/B	N/B	N/B	N/B	N/B
		Type D Rear En	gine - 72, 78,	84 and 89			
Type D Rear Engine (RE) -	72 Capacity	72 Capacity Lift	78 Capacity	78 Capacity Lift	84 Capacity	84 Capacity Lift	89 Capacity
Sun State International , LLC	N/B	N/B	N/B	N/B	N/B	N/B	N/B

BID NO: ITB 2023-02 MFSAB BASE UNIT AND CONFIGURATION PRICING

NOTE: MFSAB BASE PRICES MUST INCLUDE 3-POINT LAP/SHOULDER SEAT BELTS FOR ALL SEATING POSITIONS.

Type A							
Type A	18 Capacity	18 Capacity Lift	27 Capacity	27 Capacity Lift	29 Capacity	29 Capacity Lift	
Sun State International , LLC	N/B	N/B	N/B	N/B	N/B	N/B	
		Type C Lighte	r Weight Vers	sion (LT)			
Type C Light	29 Capacity	29 Capacity Lift					
Sun State International , LLC	N/B	N/B					
	Tyl	pe C Convention	al - 29, 47 an	d 65 Capacity			
Type C	29 Capacity	29 Capacity Lift	47 Capacity	47 Capacity Lift	65 Capacity	65 Capacity Lift	
Sun State International , LLC	\$112,308	\$115,429	\$115,762	\$119,457	\$120,633	\$123,907	
	Т	ype C Convention	onal - 71 and	77 Capacity			
Type C	71 Capacity	71 Capacity Lift	77 Capacity	77 Capacity Lift			
Sun State International , LLC	\$122,427	\$125,700	\$124,099	\$127,198			
	Ty	pe D Front Engii	ne - 71, 77 and	d 83 Capacity			
Type D Front Engine (FE)	71 Capacity	71 Capacity Lift	77 Capacity	77 Capacity Lift	83 Capacity	83 Capacity Lift	89 Capacity
Sun State International , LLC	N/B	N/B	N/B	N/B	N/B	N/B	N/B
	Type D Rear Engine - 72, 78, 84 and 89						
Type D Rear Engine (RE) -	72 Capacity	72 Capacity Lift	78 Capacity	78 Capacity Lift	84 Capacity	84 Capacity Lift	89 Capacity
Sun State International , LLC	N/B	N/B	N/B	N/B	N/B	N/B	N/B

=

18 Capacity Type A Complete School Bus

18 Capacity Type A Complete School Bus				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder				
Body Make				
Chassis Make and Model				
Standard Transmission				
Standard Engine, HP/LB-FT				
Standard Lift				
Base Bus Price:	N/B			
MFSAB PRICE:	N/B			
[C1A] Front Tow Hooks				
[C1B] Rear Tow Hooks				
[C2] Spare Disc Wheel				
[C3] Auto Trans Warranty (5 yr unlimited)				
[C4] 75-100 Gallon Fuel Tank				
[C5] Low-Profile Radial Tires				
[C6] 270 Amp L/N 4864 Alternator				
[C7] Type D Front Air Ride Suspension				
[C8] Adjustable Pedals				
[C9] 3000-PTS Transmission				
[C10] Air Ride Rear Suspension				
[C12] Straight Floor				
[C13] Auto Headlamp System				
[C14] Air Disc Brakes				
[B1] Pro Lo Hatch				
[B3] Vandal Box w/Key				
	CTD			
[B4] 76" High Headroom (minimum) [B5A] Intercom/PA	STD			
[B5B] PA with Radio				
[B5C] Stereo Radio (no PA)				
[B6] Locking Door at Fuel Tank				
[B7A] CE White Integrated Child Restraint Seat				
[B7B] IMMI Child Safety Seat				
[B7C] Syntech Integrated Child Restraint Seat				
[B7D] BTI Integrated Child Restraint Seat				
[B8] Exterior Body Light Monitor				
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	STD			
reduction in seating capacity)	315			
[B12] Full Perf. Ceiling Panel				
[B13] Bus Lockup System				
[B14] Wire Pupil Crossing Arm				
[B15] Stainless Steel Mirror System (with non-corrosive	CTD			
brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label				
[B17] Red Light Emergency Door				
[B18] Underseat Rear Heater				
[B19] Tailpipe through Bumper				
[B20] Powder-Coated Windows				
[B21] Driver's Seat with Integrated Seat Belt				
[B22] Delete W/C - Add Seat				
[B23] Delete W/C - Add Seat				
[B24] Wheelchair Securement Area Lighting	<del>                                     </del>			
[B25] Track Seating				
[B26] Standard Track-seating Seat				

27 Capacity Type A Complete School Bus

27 Capacity Type A Complete Se	Criooi Bus	
Sun State International , LLC	Enter Bid \$ in this column	
Base Bidder		
Body Make		
Chassis Make and Model		
Standard Transmission		
Standard Engine, HP/LB-FT		
Standard Lift		
Base Bus Price:	N/B	
MFSAB PRICE:	N/B	
[C1A] Front Tow Hooks		
[C1B] Rear Tow Hooks		
[C2] Spare Disc Wheel		
[C3] Auto Trans Warranty (5 yr unlimited)	STD	
[C4] 75-100 Gallon Fuel Tank		
[C5] Low-Profile Radial Tires		
[C6] 270 Amp L/N 4864 Alternator		
[C7] Type D Front Air Ride Suspension		
[C8] Adjustable Pedals		
[C9] 3000-PTS Transmission		
[C10] Air Ride Rear Suspension		
[C12] Straight Floor		
[C13] Auto Headlamp System		
[C14] Air Disc Brakes		
[B1] Pro Lo Hatch		
[B3] Vandal Box w/Key		
[B4] 76" High Headroom (minimum)	STD	
[B5A] Intercom/PA		
[B5B] PA with Radio		
[B5C] Stereo Radio (no PA)		
[B6] Locking Door at Fuel Tank		
[B7A] CE White Integrated Child Restraint Seat		
[B7B] IMMI Child Safety Seat		
[B7C] Syntech Integrated Child Restraint Seat		
[B7D] BTI Integrated Child Restraint Seat		
[B8] Exterior Body Light Monitor		
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in seating capacity)	STD	
[B12] Full Perf. Ceiling Panel		
[B13] Bus Lockup System		
[B14] Wire Pupil Crossing Arm		
[B15] Stainless Steel Mirror System (with non-corrosive brackets & fasteners)	STD	
[B16] Battery Disconnect Switch Label		
[B17] Red Light Emergency Door		
[B18] Underseat Rear Heater		
[B19] Tailpipe through Bumper		
[B20] Powder-Coated Windows		
[B21] Driver's Seat with Integrated Seat Belt		
[B22] Delete W/C - Add Seat		
[B23] Delete Seat - Add W/C		
[B24] Wheelchair Securement Area Lighting		
[B25] Track Seating	†	
[B26] Standard Track-seating Seat	†	
1220 Change of the Country Court	†	

29 Capacity Type A Complete School Bus

29 Capa	city Type A Complete Se	cnool Bus	
Sun State International , LLC	Enter Bid \$ in this		
	<u>column</u>		
Base Bidder			
Body Make			
Chassis Make and Model			
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift			
Base Bus Price:	N/B		
MFSAB PRICE:	N/B		
WESAB FRICE.	N/B		
[O4A] Frank Taw Haalia			
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank			
[C5] Low-Profile Radial Tires			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank	<del> </del>		
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor	+		
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	STD		
reduction in seating capacity)	1		
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive	STD		
brackets & fasteners)	ļ <b>.</b>		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			
g			
	1		

29 Capacity Type C LIGHT Complete School Bus				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder				
Body Make and Model				
Chassis Make and Model				
Standard Transmission				
Standard Engine, HP/LB-FT				
Base Bus Price:	N/B			
MFSAB PRICE:	N/B			
III 6712 1 111021	1472			
[C1A] Front Tow Hooks				
[C1B] Rear Tow Hooks				
[C2] Spare Disc Wheel				
[C3] Auto Trans Warranty (5 yr unlimited)	STD			
[C4] 75-100 Gallon Fuel Tank	<u> </u>			
[C5] Low-Profile Radial Tires				
[C6] 270 Amp L/N 4864 Alternator				
[C7] Type D Front Air Ride Suspension				
[C8] Adjustable Pedals				
[C9] 3000-PTS Transmission				
[C10] Air Ride Rear Suspension				
[C12] Straight Floor				
[C13] Auto Headlamp System				
[C14] Air Disc Brakes				
[B1] Pro Lo Hatch				
[B3] Vandal Box w/Key				
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA				
[B5B] PA with Radio				
[B5C] Stereo Radio (no PA)				
[B6] Locking Door at Fuel Tank				
[B7A] CE White Integrated Child Restraint Seat				
[B7B] IMMI Child Safety Seat				
[B7C] Syntech Integrated Child Restraint Seat				
[B7D] BTI Integrated Child Restraint Seat				
[B8] Exterior Body Light Monitor				
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in				
seating capacity) (Included in base MFSAB )				
[B12] Full Perf. Ceiling Panel				
[B13] Bus Lockup System				
[B14] Wire Pupil Crossing Arm				
[B15] Stainless Steel Mirror System (with non-corrosive brackets &	STD			
fasteners)	916			
[B16] Battery Disconnect Switch Label				
[B17] Red Light Emergency Door				
[B18] Underseat Rear Heater				
[B19] Tailpipe through Bumper				
[B20] Powder-Coated Windows				
[B21] Driver's Seat with Integrated Seat Belt				
[B22] Delete W/C - Add Seat				
[B23] Delete Seat - Add W/C				
[B24] Wheelchair Securement Area Lighting				
[B25] Track Seating				
[B26] Standard Track-seating Seat				

29 Capacity Type C Complete School Bus Without Lift

29 Capacity Type C Complete School Bus Without Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International, LLC			
Body Make and Model	IC, CE			
Chassis Make and Model	IC, CE			
Standard Transmission	Allison PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 200HP, 520Lb-ft			
Base Bus Price:	\$109,746			
MFSAB PRICE:	\$112,308			
WIFSAB PRICE:	\$112,306			
104415	***			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	N/A			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank	N/A			
[C5] Low-Profile Radial Tires	N/C			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$777			
[C12] Straight Floor	N/A			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,748			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	ψ.00			
reduction in seating capacity) (Included in base MFSAB	\$2,980			
1)	Ψ2,000			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-corrosive				
brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$406			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$107			
[B21] Driver's Seat with Integrated Seat Belt	\$569 N/A			
[B22] Delete W/C - Add Seat				
[B23] Delete Seat - Add W/C	N/A			
[B24] Wheelchair Securement Area Lighting	N/A			
[B25] Track Seating	N/A			
[B26] Standard Track-seating Seat	N/A			

29 Capacity Type C Complete School Bus With Lift

29 Capacity Type C Complete School Bus With Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International, LLC			
Body Make and Model	IC, CE			
Chassis Make and Model	IC, CE			
Standard Transmission	Allison PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 200HP, 520Lb-ft			
Standard Lift Model	Braun NL919FIB			
Base Bus Price:	\$115,270			
MFSAB Price:	· ·			
WIFSAB Price:	\$115,429			
10.4.1.E4.E4.E4.E.	4.00			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	N/A			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank	N/A			
[C5] Low-Profile Radial Tires	N/C (STD w/ Straight Floor)			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	\$825			
[C10] Air Ride Rear Suspension	\$777			
[C12] Straight Floor	\$870			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,748			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in	·			
seating capacity) (Included in base MFSAB )	\$1,192			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-corrosive				
brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$490			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$107			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	(\$546)			
[B23] Delete Seat - Add W/C	\$546			
[B24] Wheelchair Securement Area Lighting	383 (per W/C position)			
[B25] Track Seating	\$1,388			
[B26] Standard Track-seating Seat	\$455			
[525] Standard Track Southing Sout	Ψ-00			

47 Capacity Type C Complete School Bus Without Lift

	pacity Type C Complete School B	us Without Lift	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder	Sun State International, LLC		
Body Make and Model	IC, CE		
Chassis Make and Model	IC, CE		
Standard Transmission	Allison PTS 2500		
Standard Engine, HP/LB-FT	Cummins ISB, 200HP, 520Lb-ft		
Base Bus Price:	\$112,094		
MFSAB Price:	\$115,762		
WESAB FILE.	φ113,702		
[C4A] Front Tow Hooks	<b>#02</b>		
[C1A] Front Tow Hooks [C1B] Rear Tow Hooks	<b>\$83</b> \$61		
[C2] Spare Disc Wheel	\$175		
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*	STD (7yr/Unlimited)		
[C5] Low-Profile Radial Tires**	N/A N/C		
[C6] 270 Amp L/N 4864 Alternator [C7] Type D Front Air Ride Suspension	STD, (325 AMP) N/A		
[C8] Adjustable Pedals	\$825		
	·		
[C9] 3000-PTS Transmission	N/A		
[C10] Air Ride Rear Suspension	\$234		
[C12] Straight Floor	N/A		
[C13] Auto Headlamp System	STD		
[C14] Air Disc Brakes	\$1,654		
[B1] Pro Lo Hatch	STD		
[B3] Vandal Box w/Key	STD		
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA	N/A		
[B5B] PA with Radio	\$453		
[B5C] Stereo Radio (no PA)	N/A		
[B6] Locking Door at Fuel Tank	\$33		
[B7A] CE White Integrated Child Restraint Seat	N/A		
[B7B] IMMI Child Safety Seat	N/A		
[B7C] Syntech Integrated Child Restraint Seat	N/A		
[B7D] BTI Integrated Child Restraint Seat	\$468		
[B8] Exterior Body Light Monitor	\$193		
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	04-00		
reduction in seating capacity) (Included in base	\$4,768		
MFSAB )	OTD		
[B12] Full Perf. Ceiling Panel	STD #129		
[B13] Bus Lockup System	\$128		
[B14] Wire Pupil Crossing Arm	N/A		
[B15] Stainless Steel Mirror System (with non- corrosive brackets & fasteners)	STD		
[B16] Battery Disconnect Switch Label	\$23		
[B17] Red Light Emergency Door	\$23 \$70		
[B18] Underseat Rear Heater	\$406		
[B19] Tailpipe through Bumper	STD		
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt	\$191 <b>\$569</b>		
[B22] Delete W/C - Add Seat			
[B23] Delete W/C - Add Seat	N/A N/A		
[B24] Wheelchair Securement Area Lighting	N/A N/A		
[B25] Track Seating [B26] Standard Track-seating Seat	N/A N/A		
[[DZO] Standard Track-Seating Seat	IN/A		
<u> </u>			

47 Capacity Type C Complete School Bus With Lift

47 Capacity Type C Complete School Bus With Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International, LLC			
Body Make and Model	IC, CE			
Chassis Make and Model	IC, CE			
Standard Transmission	Allison PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 200HP, 520Lb-ft			
Standard Lift Model	Braun NL919FIB			
Base Bus Price:	\$117,493			
MFSAB Price:	\$119,457			
WFSAB FIICE.	φ119,437			
[O4A] F 4 T 11 . 1.	***			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank	N/A			
[C5] Low-Profile Radial Tires	N/C (STD w/ Straight Floor)			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$234			
[C12] Straight Floor	\$155			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,654			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no				
reduction in seating capacity) (Included in base MFSAB	\$2,682			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-corrosive				
brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$490			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$191			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	(\$546)			
[B23] Delete Seat - Add W/C	\$546			
[B24] Wheelchair Securement Area Lighting	383 (per W/C position)			
[B25] Track Seating	\$2,861			
[B26] Standard Track-seating Seat	\$455			
[525] Standard Truck Soding Sodi	Ψ=00			

65 Capacity Type C Complete School Bus Without Lift

65 Capacity Type C Complete School Bus Without Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International			
Body Make and Model	IC CE			
Chassis Make and Model	IC CE			
Standard Transmission	Allison, PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 220HP, 600Lb-ft			
Base Bus Price:	\$115,500			
MFSAB Price:	\$120,633			
WESAB FILE.	\$120,033			
[C1A] Front Tow Hooks	\$83			
[C1A] Front Tow Hooks [C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (5 yr unlimited)				
[C4] 75-100 Gallon Fuel Tank	STD (7yr/Unlimited) \$672			
[C5] Low-Profile Radial Tires	%6/2 N/C			
[C6] 270 Amp L/N 4864 Alternator				
	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$519			
[C12] Straight Floor	N/A			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,471			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no				
reduction in seating capacity) (Included in base	\$6,556			
MFSAB)				
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-				
corrosive brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$406			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$233			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	N/A			
[B23] Delete Seat - Add W/C	N/A			
[B24] Wheelchair Securement Area Lighting	N/A			
[B25] Track Seating	N/A			
[B26] Standard Track-seating Seat	N/A			
, .,				
	ı			

65 Capacity Type C Complete School Bus With Lift

65 Capacity Type C Complete School Bus With Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International			
Body Make and Model	IC CE			
Chassis Make and Model	IC CE			
Standard Transmission	Allison, PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 220HP, 600Lb-ft			
Standard Lift Model	Braun NL919FIB			
Base Bus Price:	\$120,708			
MFSAB Price:	\$123,907			
MFSAB FIICE.	\$123, <del>9</del> 07			
TOTAL T	<b>***</b>			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank	\$672			
[C5] Low-Profile Radial Tires	N/C (STD w/ Straight Floor)			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$519			
[C12] Straight Floor	\$551			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,471			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	Ŧ · • • •			
reduction in seating capacity) (Included in base MFSAB	\$4,172			
[D40] Full Dark Calling Days !	OTD			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-corrosive	STD			
brackets & fasteners)				
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$490			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$233			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	(\$546)			
[B23] Delete Seat - Add W/C	\$546			
[B24] Wheelchair Securement Area Lighting	383 (per W/C position)			
[B25] Track Seating	\$3,983			
[B26] Standard Track-seating Seat	\$455			

71 Capacity Type C Complete School Bus Without Lift

71 Capacity Type C Complete School Bus Without Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International			
Body Make and Model	IC CE			
Chassis Make and Model	IC CE			
Standard Transmission	Allison, PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 220HP, 600Lb-ft			
Base Bus Price:	\$116,802			
MFSAB Price:	· · · · · · · · · · · · · · · · · · ·			
WFSAB Price:	\$122,427			
FOAA1 F 4 T II. II.	***			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank*	\$672			
[C5] Low-Profile Radial Tires**	N/C			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$519			
[C12] Straight Floor	N/A			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,471			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	7.55			
reduction in seating capacity) (Included in base	\$7,152			
MFSAB)	Ų.,. <u></u>			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-				
corrosive brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$406			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$254			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	N/A			
[B23] Delete Seat - Add W/C	N/A N/A			
[B23] Delete Seat - Add W/C [B24] Wheelchair Securement Area Lighting	N/A N/A			
	N/A N/A			
[B25] Track Seating				
[B26] Standard Track-seating Seat	N/A			

71 Capacity Type C Complete School Bus With Lift

71 Capacity Type C Complete School Bus With Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International			
Body Make and Model	IC CE			
Chassis Make and Model	IC CE			
Standard Transmission	Allison, PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 220HP, 600Lb-ft			
Standard Lift Model	Braun NL919FIB			
Base Bus Price:	\$122,008			
	· ·			
MFSAB Price:	\$125,700			
104415 47 44 4	***			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank	\$672			
[C5] Low-Profile Radial Tires	N/C (STD w/ Straight Floor)			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	N/A			
[C10] Air Ride Rear Suspension	\$519			
[C12] Straight Floor	\$551			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,471			
[B1] Pro Lo Hatch	STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	<b>V.00</b>			
reduction in seating capacity) (Included in base MFSAB	\$4,768			
)	ψ 1,1 <b>0</b> 0			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-corrosive				
brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$490			
[B19] Tailpipe through Bumper	\$490 <b>STD</b>			
[B20] Powder-Coated Windows	\$254			
	\$569			
[B21] Driver's Seat with Integrated Seat Belt	-			
[B22] Delete W/C - Add Seat	(\$546) \$546			
[B23] Delete Seat - Add W/C	\$546			
[B24] Wheelchair Securement Area Lighting	383 (per W/C position)			
[B25] Track Seating	\$4,505			
[B26] Standard Track-seating Seat	\$455			

77 Capacity Type C Complete School Bus Without Lift

77 Capacity Type C Complete School Bus Without Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder	Sun State International			
Body Make and Model	IC CE			
Chassis Make and Model	IC CE			
Standard Transmission	Allison, PTS 2500			
Standard Engine, HP/LB-FT	Cummins ISB, 250HP, 660Lb-ft			
Base Bus Price:	\$117,985			
MFSAB Price:	\$124,099			
MFSAD FILE.	φ124,033			
[C1A] Front Tow Hooks	\$83			
[C1B] Rear Tow Hooks	\$63 \$61			
[C2] Spare Disc Wheel	\$175			
[C3] Auto Trans Warranty (7 yr unlimited)	STD (7yr/Unlimited)			
[C4] 75-100 Gallon Fuel Tank*	\$672			
[C5] Low-Profile Radial Tires**	N/C			
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)			
[C7] Type D Front Air Ride Suspension	N/A			
[C8] Adjustable Pedals	\$825			
[C9] 3000-PTS Transmission	\$5,653			
[C10] Air Ride Rear Suspension	\$5,653 \$519			
[C12] Straight Floor	N/A			
[C13] Auto Headlamp System	STD			
[C14] Air Disc Brakes	\$1,434			
[B1] Pro Lo Hatch	\$1,434 STD			
[B3] Vandal Box w/Key	STD			
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	N/A			
[B5B] PA with Radio	\$453			
[B5C] Stereo Radio (no PA)	N/A			
[B6] Locking Door at Fuel Tank	\$33			
[B7A] CE White Integrated Child Restraint Seat	N/A			
[B7B] IMMI Child Safety Seat	N/A			
[B7C] Syntech Integrated Child Restraint Seat	N/A			
[B7D] BTI Integrated Child Restraint Seat	\$468			
[B8] Exterior Body Light Monitor	\$193			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no	Ψ135			
reduction in seating capacity) (Included in base	\$7,748			
MFSAB)	ψ1,140			
[B12] Full Perf. Ceiling Panel	STD			
[B13] Bus Lockup System	\$128			
[B14] Wire Pupil Crossing Arm	N/A			
[B15] Stainless Steel Mirror System (with non-				
corrosive brackets & fasteners)	STD			
[B16] Battery Disconnect Switch Label	\$23			
[B17] Red Light Emergency Door	\$70			
[B18] Underseat Rear Heater	\$406			
[B19] Tailpipe through Bumper	STD			
[B20] Powder-Coated Windows	\$276			
[B21] Driver's Seat with Integrated Seat Belt	\$569			
[B22] Delete W/C - Add Seat	N/A			
[B23] Delete Seat - Add W/C	N/A			
[B24] Wheelchair Securement Area Lighting	N/A			
[B25] Track Seating	N/A			
[B26] Standard Track-seating Seat	N/A			

77 Capacity Type C Complete School Bus With Lift

77 Capacity Type C Complete School Bus With Lift			
Sun State International , LLC Base Bidder	Enter Bid \$ in this column  Sun State International		_
Body Make and Model	IC CE		_
Chassis Make and Model	IC CE		_
Standard Transmission	Allison, PTS 2500		_
	Cummins ISB, 250HP, 660Lb-ft		_
Standard Engine, HP/LB-FT Standard Lift Model	Braun NL919FIB		
			_
Base Bus Price:	\$123,022		
MFSAB Price:	\$127,198		
[C1A] Front Tow Hooks	\$83		
[C1B] Rear Tow Hooks	\$61		
[C2] Spare Disc Wheel	\$175		
[C3] Auto Trans Warranty (5 yr unlimited)	STD (7yr/Unlimited)		
[C4] 75-100 Gallon Fuel Tank	\$672		
[C5] Low-Profile Radial Tires	N/C (STD w/ Straight Floor)		
[C6] 270 Amp L/N 4864 Alternator	STD, (325 AMP)		
[C7] Type D Front Air Ride Suspension	N/A		
[C8] Adjustable Pedals	\$825		
[C9] 3000-PTS Transmission	\$5,653		
[C10] Air Ride Rear Suspension	\$519		
[C12] Straight Floor	\$551		
[C13] Auto Headlamp System	STD		
[C14] Air Disc Brakes	\$1,434		
[B1] Pro Lo Hatch	STD		
[B3] Vandal Box w/Key	STD		
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA	N/A		
[B5B] PA with Radio	\$453		
[B5C] Stereo Radio (no PA)	N/A		
[B6] Locking Door at Fuel Tank	\$33		
[B7A] CE White Integrated Child Restraint Seat	N/A		
[B7B] IMMI Child Safety Seat	N/A		
[B7C] Syntech Integrated Child Restraint Seat	N/A		
[B7D] BTI Integrated Child Restraint Seat	\$468		
[B8] Exterior Body Light Monitor	\$193		
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no			
reduction in seating capacity) (Included in base	\$5,364		
MFSAB )			
[B12] Full Perf. Ceiling Panel	STD		
[B13] Bus Lockup System	\$128		
[B14] Wire Pupil Crossing Arm	N/A		
[B15] Stainless Steel Mirror System (with non-	STD		
corrosive brackets & fasteners)			
[B16] Battery Disconnect Switch Label	\$23		
[B17] Red Light Emergency Door	\$70		
[B18] Underseat Rear Heater	\$490		
[B19] Tailpipe through Bumper	STD		
[B20] Powder-Coated Windows	\$276		
[B21] Driver's Seat with Integrated Seat Belt	\$569		
[B22] Delete W/C - Add Seat	(\$546)		
[B23] Delete Seat - Add W/C	\$546		
[B24] Wheelchair Securement Area Lighting	383 (per W/C position)		
[B25] Track Seating	\$5,023		
[B26] Standard Track-seating Seat	\$455		

71 Capacity Type D Front Engine (FE) Complete School Bus

Tr Supusity Type 2 Tro	nt Engine (FE) Complet	le dendor Bas	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
	10.5		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB)			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive	etn.		
brackets & fasteners)	STD		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

71 Capacity Type D Front Engine (FE) Complete School Bus with Lift

71 Capacity Type D Front E	<u> </u>	HOOF BUS WITH LIIT	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB)	STD		
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive			
brackets & fasteners)			
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

77 Capacity Type D Front Engine (FE) Complete School Bus

77 Capacity Type D Fro		e Scrioor Bus	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make	Column		
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
INI SABT TICE.	1475		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB )			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive	STD		
brackets & fasteners)	015		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

77 Capacity Type D Front Engine (FE) Complete School Bus with Lift

77 Capacity Type D Front El	<del>• • • • • • • • • • • • • • • • • • • </del>	THOOLEUS WITH THE	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
	=		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB)			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive	070		
brackets & fasteners)	STD		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			
<del>-</del>			
	•		

83 Capacity Type D Front Engine (FE) Complete School Bus

83 Capacity Type D Fro		le School Bus	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
	100		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA	0.5		
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB)			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive			
brackets & fasteners)	STD		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			
[			

83 Capacity Type D Front Engine (FE) Complete School Bus with Lift

83 Capacity Type D Front El	<u> </u>	nooi Bus with Liπ	
Sun State International , LLC	Enter Bid \$ in this column		
Base Bidder / Body Make	<u> </u>		
Standard Transmission			
Standard Engine, HP/LB-FT			
Standard Lift Model			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
INI GAB I Nec.	1475		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator [C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in			
seating capacity) (Included in base MFSAB )			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive	STD		
brackets & fasteners)			
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

#### 89 Capacity Type D Front Engine (FE) Complete School Bus

Sun State International , LLC	Enter Bid \$ in this	
<u>our otate international ; EEO</u>	<u>column</u>	
Base Bidder		
Body Make and Model		
Chassis Make and Model		
Standard Transmission		
Standard Engine, HP/LB-FT		
Base Bus Price:	N/B	
MFSAB Price:	N/B	
[C1A] Front Tow Hooks		
[C1B] Rear Tow Hooks		
[C2] Spare Disc Wheel		
[C3] Auto Trans Warranty (5 yr unlimited)		
[C4] 75-100 Gallon Fuel Tank*		
[C5] Low-Profile Radial Tires**		
[C6] 270 Amp L/N 4864 Alternator		
[C7] Type D Front Air Ride Suspension		
[C8] Adjustable Pedals		
[C9] 3000-PTS Transmission		
[C10] Air Ride Rear Suspension		
[C12] Straight Floor		
[C13] Auto Headlamp System		
[C14] Air Disc Brakes		
[B1] Pro Lo Hatch		
[B3] Vandal Box w/Key		
[B4] 76" High Headroom (minimum)	STD	
	טופ	
[B5A] Intercom/PA		
[B5B] PA with Radio		
[B5C] Stereo Radio (no PA)		
[B6] Locking Door at Fuel Tank		
[B7A] CE White Integrated Child Restraint Seat		
[B7B] IMMI Child Safety Seat		
[B7C] Syntech Integrated Child Restraint Seat		
[B7D] BTI Integrated Child Restraint Seat		
[B8] Exterior Body Light Monitor		
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in		
seating capacity) (Included in base MFSAB )		
[B12] Full Perf. Ceiling Panel		
[B13] Bus Lockup System		
[B14] Wire Pupil Crossing Arm		
[B15] Stainless Steel Mirror System (with non-corrosive	STD	
brackets & fasteners)		
[B16] Battery Disconnect Switch Label		
[B17] Red Light Emergency Door		
[B18] Underseat Rear Heater		
[B19] Tailpipe through Bumper		
[B20] Powder-Coated Windows		
[B21] Driver's Seat with Integrated Seat Belt		
[B22] Delete W/C - Add Seat		
[B23] Delete Seat - Add W/C		
[B24] Wheelchair Securement Area Lighting		
[B25] Track Seating		
[B26] Standard Track-seating Seat		

72 Capacity Type D Rear Engine (RE) Complete School Bus

Sun State International , LLC  Base Bidder  Body Make Standard Transmission Standard Engine, HP/LB-FT  Base Bus Price: N/B  [C1A] Front Tow Hooks [C1B] Rear Tow Hooks	
Column	
Body Make   Standard Transmission   Standard Engine, HP/LB-FT   Sase Bus Price:   N/B   N/B   N/B   C1A] Front Tow Hooks	
Standard Transmission         Standard Engine, HP/LB-FT           Base Bus Price:         N/B           MFSAB Price:         N/B           [C1A] Front Tow Hooks         Image: Content of the price of the pr	
Standard Engine, HP/LB-FT  Base Bus Price:  MFSAB Price:  N/B  [C1A] Front Tow Hooks	
Base Bus Price:  MFSAB Price:  N/B  [C1A] Front Tow Hooks	
MFSAB Price: N/B  [C1A] Front Tow Hooks	
[C1A] Front Tow Hooks	
[C2] Spare Disc Wheel	
[C3] Auto Trans Warranty (5 yr unlimited)	
[C4] 75-100 Gallon Fuel Tank*	
[C5] Low-Profile Radial Tires**	
[C6] 270 Amp L/N 4864 Alternator	
[C7] Type D Front Air Ride Suspension	
[C8] Adjustable Pedals	
[C9] 3000-PTS Transmission	
[C10] Air Ride Rear Suspension	
[C12] Straight Floor	
[C13] Auto Headlamp System	
[C14] Air Disc Brakes	
[B1] Pro Lo Hatch	
[B3] Vandal Box w/Key	
[B4] 76" High Headroom (minimum)	
[B5A] Intercom/PA	
[B5B] PA with Radio	
[B5C] Stereo Radio (no PA)	
[B6] Locking Door at Fuel Tank	
[B7A] CE White Integrated Child Restraint Seat	
[B7B] IMMI Child Safety Seat	
[B7C] Syntech Integrated Child Restraint Seat	
[B7D] BTI Integrated Child Restraint Seat	
[B8] Exterior Body Light Monitor	
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in seating	
capacity) (Included in base MFSAB)	
[B12] Full Perf. Ceiling Panel	
[B13] Bus Lockup System	
[B14] Wire Pupil Crossing Arm	
IB15] Stainless Steel Mirror System (with non-corrosive brackets &	
fasteners)	
[B16] Battery Disconnect Switch Label	
[B17] Red Light Emergency Door	
[B18] Underseat Rear Heater	
[B19] Tailpipe through Bumper	
[B20] Powder-Coated Windows	
[B21] Driver's Seat with Integrated Seat Belt	
[B22] Delete W/C - Add Seat	
[B23] Delete Seat - Add W/C	
[B24] Wheelchair Securement Area Lighting	
[B25] Track Seating	
[B26] Standard Track-seating Seat	

72 Capacity Type D Rear Engine (RE) Complete School Bus with Lift

72 Capacity Type D Rear Engine (RE) Complete School Bus with Lift			
Sun State International , LLC	Enter Bid \$ in this		
	<u>column</u>		
Base Bidder			
Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA	0.12		
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in seating			
capacity) (Included in base MFSAB )			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive brackets &	070		
fasteners)	STD		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

78 Capacity Type D Rear Engine (RE) Complete School Bus

78 Capacity Type D Rear Engine (RE) Complete School Bus			
Sun State International , LLC	Enter Bid \$ in this		
	<u>column</u>		
Base Bidder			
Body Make			
Standard Transmission			
Standard Engine, HP/LB-FT			
Base Bus Price:	N/B		
MFSAB Price:	N/B		
[C1A] Front Tow Hooks			
[C1B] Rear Tow Hooks			
[C2] Spare Disc Wheel			
[C3] Auto Trans Warranty (5 yr unlimited)			
[C4] 75-100 Gallon Fuel Tank*			
[C5] Low-Profile Radial Tires**			
[C6] 270 Amp L/N 4864 Alternator			
[C7] Type D Front Air Ride Suspension			
[C8] Adjustable Pedals			
[C9] 3000-PTS Transmission			
[C10] Air Ride Rear Suspension			
[C12] Straight Floor			
[C13] Auto Headlamp System			
[C14] Air Disc Brakes			
[B1] Pro Lo Hatch			
[B3] Vandal Box w/Key			
[B4] 76" High Headroom (minimum)	STD		
[B5A] Intercom/PA			
[B5B] PA with Radio			
[B5C] Stereo Radio (no PA)			
[B6] Locking Door at Fuel Tank			
[B7A] CE White Integrated Child Restraint Seat			
[B7B] IMMI Child Safety Seat			
[B7C] Syntech Integrated Child Restraint Seat			
[B7D] BTI Integrated Child Restraint Seat			
[B8] Exterior Body Light Monitor			
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in seating			
capacity) (Included in base MFSAB )			
[B12] Full Perf. Ceiling Panel			
[B13] Bus Lockup System			
[B14] Wire Pupil Crossing Arm			
[B15] Stainless Steel Mirror System (with non-corrosive brackets &	STD		
fasteners)	315		
[B16] Battery Disconnect Switch Label			
[B17] Red Light Emergency Door			
[B18] Underseat Rear Heater			
[B19] Tailpipe through Bumper			
[B20] Powder-Coated Windows			
[B21] Driver's Seat with Integrated Seat Belt			
[B22] Delete W/C - Add Seat			
[B23] Delete Seat - Add W/C			
[B24] Wheelchair Securement Area Lighting			
[B25] Track Seating			
[B26] Standard Track-seating Seat			

78 Capacity Type D Rear Engine (RE) Complete School Bus with Lift

78 Capacity Type D Rear Engine (RE) Complete School Bus with Lift						
Sun State International , LLC	Enter Bid \$ in this					
	<u>column</u>					
Base Bidder						
Body Make						
Standard Transmission						
Standard Engine, HP/LB-FT						
Base Bus Price:	N/B					
MFSAB Price:	N/B					
[C1A] Front Tow Hooks						
[C1B] Rear Tow Hooks						
[C2] Spare Disc Wheel						
[C3] Auto Trans Warranty (5 yr unlimited)						
[C4] 75-100 Gallon Fuel Tank*						
[C5] Low-Profile Radial Tires**						
[C6] 270 Amp L/N 4864 Alternator						
[C7] Type D Front Air Ride Suspension						
[C8] Adjustable Pedals						
[C9] 3000-PTS Transmission						
[C10] Air Ride Rear Suspension						
[C12] Straight Floor						
[C13] Auto Headlamp System						
[C14] Air Disc Brakes						
[B1] Pro Lo Hatch						
[B3] Vandal Box w/Key						
[B4] 76" High Headroom (minimum)	STD					
[B5A] Intercom/PA						
[B5B] PA with Radio						
[B5C] Stereo Radio (no PA)						
[B6] Locking Door at Fuel Tank						
[B7A] CE White Integrated Child Restraint Seat						
[B7B] IMMI Child Safety Seat						
[B7C] Syntech Integrated Child Restraint Seat						
[B7D] BTI Integrated Child Restraint Seat						
[B8] Exterior Body Light Monitor						
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no reduction in seating						
capacity) (Included in base MFSAB )						
[B12] Full Perf. Ceiling Panel						
[B13] Bus Lockup System						
[B14] Wire Pupil Crossing Arm						
[B15] Stainless Steel Mirror System (with non-corrosive brackets &	STD					
fasteners)	315					
[B16] Battery Disconnect Switch Label						
[B17] Red Light Emergency Door						
[B18] Underseat Rear Heater						
[B19] Tailpipe through Bumper						
[B20] Powder-Coated Windows						
[B21] Driver's Seat with Integrated Seat Belt						
[B22] Delete W/C - Add Seat						
[B23] Delete Seat - Add W/C						
[B24] Wheelchair Securement Area Lighting						
[B25] Track Seating						
[B26] Standard Track-seating Seat						

84 Capacity Type D Rear Engine (RE) Complete School Bus				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder				
Body Make and Model				
Chassis Make and Model				
Standard Transmission				
Standard Engine, HP/LB-FT				
Base Bus Price:	N/B			
	· · · · · · · · · · · · · · · · · · ·			
MFSAB Price:	N/B			
[C1A] Front Tow Hooks				
[C1B] Rear Tow Hooks				
[C2] Spare Disc Wheel				
[C3] Auto Trans Warranty (5 yr unlimited)				
[C4] 75-100 Gallon Fuel Tank*				
[C5] Low-Profile Radial Tires**				
[C6] 270 Amp L/N 4864 Alternator				
[C7] Type D Front Air Ride Suspension				
[C8] Adjustable Pedals				
[C9] 3000-PTS Transmission				
[C10] Air Ride Rear Suspension				
[C12] Straight Floor				
[C13] Auto Headlamp System				
[C14] Air Disc Brakes				
[B1] Pro Lo Hatch				
[B3] Vandal Box w/Key				
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA	310			
[B5B] PA with Radio				
[B5C] Stereo Radio (no PA)				
[B6] Locking Door at Fuel Tank				
[B7A] CE White Integrated Child Restraint Seat				
[B7B] IMMI Child Safety Seat				
[B7C] Syntech Integrated Child Restraint Seat				
[B7D] BTI Integrated Child Restraint Seat				
[B8] Exterior Body Light Monitor				
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no				
reduction in seating capacity) (Included in base MFSAB )				
- ' ' ' '				
[B12] Full Perf. Ceiling Panel				
[B13] Bus Lockup System				
[B14] Wire Pupil Crossing Arm				
[B15] Stainless Steel Mirror System (with non-corrosive	STD			
brackets & fasteners)				
[B16] Battery Disconnect Switch Label				
[B17] Red Light Emergency Door				
[B18] Underseat Rear Heater				
[B19] Tailpipe through Bumper				
[B20] Powder-Coated Windows				
[B21] Driver's Seat with Integrated Seat Belt				
[B22] Delete W/C - Add Seat				
[B23] Delete Seat - Add W/C				
[B24] Wheelchair Securement Area Lighting				
[B25] Track Seating				
[B26] Standard Track-seating Seat				
, and the second				

84 Capacity Type D Rear Engine (RE) Complete School Bus With Lift

84 Capacity Type D Rear Engine (RE) Complete School Bus With Lift				
Sun State International , LLC	Enter Bid \$ in this column			
Base Bidder				
Body Make and Model				
Chassis Make and Model				
Standard Transmission				
Standard Engine, HP/LB-FT				
Standard Lift Model				
Base Bus Price:	N/B			
MFSAB Price:	N/B			
INI SAB FIICE.	14/15			
[C1A] Front Tow Hooks				
[C1B] Rear Tow Hooks				
[C2] Spare Disc Wheel				
[C3] Auto Trans Warranty (5 yr unlimited)				
[C4] 75-100 Gallon Fuel Tank*				
[C5] Low-Profile Radial Tires**				
[C6] 270 Amp L/N 4864 Alternator				
[C7] Type D Front Air Ride Suspension				
[C8] Adjustable Pedals				
[C9] 3000-PTS Transmission				
[C10] Air Ride Rear Suspension				
[C12] Straight Floor				
[C13] Auto Headlamp System				
[C14] Air Disc Brakes				
[B1] Pro Lo Hatch				
[B3] Vandal Box w/Key				
[B4] 76" High Headroom (minimum)	STD			
[B5A] Intercom/PA				
[B5B] PA with Radio				
[B5C] Stereo Radio (no PA)				
[B6] Locking Door at Fuel Tank				
[B7A] CE White Integrated Child Restraint Seat				
[B7B] IMMI Child Safety Seat				
[B7C] Syntech Integrated Child Restraint Seat				
[B7D] BTI Integrated Child Restraint Seat				
[B8] Exterior Body Light Monitor				
[B11] Lap/Shoulder Belts (PRICE PER UNIT - no				
reduction in seating capacity) (Included in base MFSAB)				
[B12] Full Perf. Ceiling Panel				
[B13] Bus Lockup System				
[B14] Wire Pupil Crossing Arm				
[B15] Stainless Steel Mirror System (with non-corrosive	STD			
brackets & fasteners)				
[B16] Battery Disconnect Switch Label				
[B17] Red Light Emergency Door				
[B18] Underseat Rear Heater				
[B19] Tailpipe through Bumper				
[B20] Powder-Coated Windows				
[B21] Driver's Seat with Integrated Seat Belt				
[B22] Delete W/C - Add Seat				
[B23] Delete Seat - Add W/C				
[B24] Wheelchair Securement Area Lighting				
[B25] Track Seating				
[B26] Standard Track-seating Seat				

### **DELIVERY REGIONS**

Sun State International , LLC

REGION 1	COUNTY SEAT
Bay	Panama City
Calhoun	Blountstown
Escambia	Pensacola
Franklin	Apalachicola
Gulf	Port St. Joe
Holmes	Bonifay
Jackson	Marianna
Liberty	Bristol
Okaloosa	Crestview
Santa Rosa	Milton
Walton	Defuniak Springs
Washington	Chipley
REGION 2	COUNTY SEAT
Alachua	Gainesville
Baker	Macclenny
Bradford	Starke
Clay	Green Cove Springs
Columbia	Lake City
Dixie	Cross City
Duval	Jacksonville
Gadsden	Quincy
Gilchrist	Trenton
Hamilton	Jasper
Jefferson	Monticello
Lafayette	Mayo
Leon	Tallahassee
Levy	Bronson
Madison	Madison
Nassau	Fernandina Beach
Suwannee	Live Oak
Taylor	Perry
Union	Lake Butler
Wakulla	Crawfordville

REGION 3	COUNTY SEAT
Citrus	Inverness
Flagler	Bunnell
Hernando	Brooksville
Hillsborough	Tampa
Lake	Tavares
Marion	Ocala
Orange	Orlando
Pasco	New Port Richey
Pinellas	Clearwater
Putnam	Palatka
St. Johns	St. Augustine
Seminole	Sanford
Sumter	Bushnell
Volusia	DeLand
REGION 4	<u>COUNTY SEAT</u>
Brevard	Cocoa
Charlotte	Punta Gorda
DeSoto	Arcadia
Glades	Moore Haven
Hardee	Wauchula
Hendry	LaBelle
Highlands	Sebring
Indian River	Vero Beach
Lee	Fort Myers
Manatee	Bradenton
Martin	Stuart
Okeechobee	Okeechobee
Osceola	Kissimmee
Polk	Bartow
St. Lucie	Fort Pierce
Sarasota	Sarasota
REGION 5	<u>COUNTY SEAT</u>
Broward	Ft. Lauderdale
Collier	Naples
Miami-Dade	Miami
Monroe	Key West
Palm Beach	W. Palm Beach

#### FLORIDA BUS DELIVERY PRICE INFORMATION

#### BY BUS BIDDER/MANUFACTURER

Sun State International , LLC Bus Manufacturer:	
Enter Delivery Cost Per Region	
REGION 1	\$1,706
REGION 2	\$1,320
REGION 3	\$1,320
REGION 4	\$1,570
REGION 5	\$1,680

Sun State International, LLC - IC Bus SEATING CAPACITY FOR WHEELCHAIR LIFT BUSES

		WITH FROI	NT-MOUNTED LIFT	<u>W</u> I	TH REAR-MOUNTE	D LIFT	
		Standard	Maximum # Passengers in	Maximum # Wheelchair	Standard	Maximum # Passengers in	Maximum # Wheelchair
Capacity	Type	Wheelchair	Regular Seats	Spaces Available	Wheelchair	Regular Seats	Spaces Available
		Spaces	(with 3	(reduces regular	Spaces	(with 3	(reduces regular
			wheelchairs)	seating)		wheelchairs)	seating)
18	Α	N/B	N/B	N/B	N/B	N/B	N/B
27	Α	N/B	N/B	N/B	N/B	N/B	N/B
29	Α	N/B	N/B	N/B	N/B	N/B	N/B
29 LIGHT	С	N/B	N/B	N/B	N/B	N/B	N/B
29	С	3	4	3	3	4	3
47	O	3	16	5	3	22	5
65	O	3	28	7	3	42	7
71	O	3	30	9	3	48	9
77	C	3	32	9	3	54	9
71 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
77 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
83 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
72 RE	D	N/B	N/B	N/B	N/B	N/B	N/B
78 RE	D	N/B	N/B	N/B	N/B	N/B	N/B
84 RE	D	N/B	N/B	N/B	N/B	N/B	N/B

Sun State International, LLC - IC Bus SEATING CAPACITY FOR WHEELCHAIR LIFT BUSES WITH STRAIGHT FLOOR OPTION

		WITH FROI	NT-MOUNTED LIFT		<u>WI</u>	TH REAR-MOUNTE	D LIFT
Capacity	Туре	Standard Wheelchair Spaces	Maximum # Passengers in Regular Seats (with 3 wheelchairs)	Maximum # Wheelchair Spaces Available (reduces regular seating)	Standard Wheelchair Spaces	Maximum # Passengers in Regular Seats (with 3 wheelchairs)	Maximum # Wheelchair Spaces Available (reduces regular seating)
18	Α	N/B	N/B	N/B	N/B	N/B	N/B
27	Α	N/B	N/B	N/B	N/B	N/B	N/B
29	Α	N/B	N/B	N/B	N/B	N/B	N/B
29 LIGHT	С	N/B	N/B	N/B	N/B	N/B	N/B
29	С	3	6	5	3	12	5
47	С	3	16	7	3	27	7
65	С	3	26	9	3	42	9
71	С	3	30	11	3	48	11
77	С	3	32	11	3	54	11
71 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
77 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
83 FE	D	N/B	N/B	N/B	N/B	N/B	N/B
72 RE	D	N/B	N/B	N/B	N/B	N/B	N/B
78 RE	D	N/B	N/B	N/B	N/B	N/B	N/B
84 RE	D	N/B	N/B	N/B	N/B	N/B	N/B

# Sun State International, LLC - IC Bus STANDARD AND OPTIONAL WHEELCHAIR LIFT AND WHEELCHAIR/OCCUPANT RESTRAINT SYSTEMS INFORMATION

#### **Standard Wheelchair Lift**

Bus Type	Lift Make	Lift Model
Type A	N/B	N/B
Type C	Braun	NL919FIB, 800#
Type D	N/B	N/B

#### **Optional Wheelchair Lift #1**

Bus Type	Lift Make	Lift Model	Additional Price
Type A	N/B	N/B	N/A
Type C	Braun	NCL1000FIB3451, 1000#, 34" Wide	\$233
Type D	N/B	N/B	N/A

#### **Optional Wheelchair Lift #2**

Bus Type	Lift Make	Lift Model	Additional Price
Type A	N/B	N/B	N/A
Type C	N/A	N/A	N/A
Type D	N/B	N/B	N/A

#### Standard Wheelchair Tiedown/Occupant Restraint System (WTORS)

Bus Type	WTORS Make	WTORS Model
Type A	N/B	N/B
Type C	Sure-Lok	FF612-4C-7
Type D	N/B	N/B

#### Optional Wheelchair Tiedown/Occupant Restraint System (WTORS) #1

Bus Type	WTORS Make	WTORS Model	Additional Price
Type A	N/B	N/B	N/A
Type C	Sure-Lok	FF612S-4C-7	N/C
Type D	N/B	N/B	N/A

#### Optional Wheelchair Tiedown/Occupant Restraint System (WTORS) #2

Bus Type	WTORS Make	WTORS Model	Additional Price
Type A	N/B	N/B	N/A
Type C	N/A	N/A	N/A
Type D	N/B	N/B	N/A

# Sun State International, LLC TYPE A OPTIONAL AIR CONDITIONING

AC NAME	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S

## Sun State International, LLC TYPE A ADDITIONAL AIR CONDITIONING OPTIONS

MANUFACTURER	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S

# Sun State International, LLC TYPE C OPTIONAL AIR CONDITIONING

AC NAME	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S
IC Air, System 1	Rear In-wall evap, skirt cond, TM 21 comp, digital control	IC integrated independent Dash A/C included in base bus	\$5,954	\$5,954	29-47
IC Air, System 2	Rear In-wall evap, roof cond, TM 21 comp, digital control	IC integrated independent Dash A/C included in base bus	\$8,066	\$8,066	29-47
IC Air, System 3	Front & Rear In-wall evaps, skirt cond, 2-TM 21 comp, digital controls	IC integrated independent Dash A/C included in base bus	\$11,582	\$11,582	65-77
IC Air, System 4	Front & Rear In-wall evaps, skirt cond, TM 43 comp, digital controls	IC integrated independent Dash A/C included in base bus	\$12,326	\$12,326	65-77
IC Air System 5	Front & Rear In-wall evaps, roof cond, 2-TM 21 comp, digital controls	IC integrated independent Dash A/C included in base bus	\$12,757	\$12,757	65-77
Valeo, LAC84616	Rear In-wall Evap, tube & fin skirt cond, TM-16 Comp, analog control	IC integrated independent Dash A/C included in base bus	\$11,978	\$11,978	29
Valeo, LAC88FW8846462121	Front & Rear In-wall evaps, tube& fin skirt cond, 2 - TM 21 Comp, analog control	IC integrated independent Dash A/C included in base bus	\$17,227	\$17,227	47
Valeo, LAC88FW8845452121	Front & Rear In-wall evaps, tube& fin skirt cond, 2 - TM 21 Comp, analog control	IC integrated independent Dash A/C included in base bus	\$17,925	\$17,925	65-77
Valeo, LAC88FW8845454343	Front & Rear In-wall evaps, tube& fin skirt cond, TM 43 Comp, analog control	IC integrated independent Dash A/C included in base bus	\$19,256	\$19,256	65-77
TransAir, TA45F2	Front In-wall evap, micro ch skirt cond, TM 16 comp, analog control	IC integrated independent Dash A/C included in base bus	\$8,806	\$8,806	29
TransAir, TA55B3	Rear In-wall evap, micro ch skirt cond, TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$12,344	\$12,344	47
TransAir, TA45F55B23	Front & Rear In-wall evap, micro ch skirt cond, TM16,TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$17,451	\$17,451	65
TransAir, TA55F55B33	Front & Rear In-wall evap, micro ch skirt cond, 2 -TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$17,709	\$17,709	71-77
TransAir, TA55F55B33	Front & Rear In-wall evap, micro ch skirt cond, TM 43 comp, analog control	IC integrated independent Dash A/C included in base bus	\$18,658	\$18,658	71-77
TransAir-Tulsa, TA45F2	Front In-wall evap, micro ch skirt cond, TM 16 comp, analog control	IC integrated independent Dash A/C included in base bus	\$5,870	\$5,870	29
TransAir-Tulsa, TA55B3	Rear In-wall evap, micro ch skirt cond, TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$6,129	\$6,129	47
TransAir-Tulsa, TA45F55B23	Front & Rear In-wall evap, micro ch skirt cond, TM16,TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$12,715	\$12,715	65

TransAir-Tulsa, TA55F55B33	Front & Rear In-wall evap, micro ch skirt cond, 2 -TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$13,083	\$13,083	71-77
TransAir-Tulsa, TA55F55B33	Front & Rear In-wall evap, micro ch skirt cond, TM 43 comp, analog control	IC integrated independent Dash A/C included in base bus	\$13,730	\$13,730	71-77
MCC, AC-923W102	Rear In-wall evap, micro ch skirt cond, TM 16 comp, analog control	IC integrated independent Dash A/C included in base bus	\$13,063	\$13,063	29
MCC, AC-10W1W122	Front & Rear In-wall evap, micro ch skirt cond, 2 -TM 16 comp, analog control	IC integrated independent Dash A/C included in base bus	\$17,327	\$17,327	47
MCCC, AC-13W1W133	Front & Rear In-wall evap, micro ch skirt cond, 2 -TM 21 comp, analog control	IC integrated independent Dash A/C included in base bus	\$19,706	\$19,706	65 - 77
MCC, AC-15W1W133	Front & Rear In-wall evap, micro ch skirt cond, TM 43 comp, analog control	IC integrated independent Dash A/C included in base bus	\$22,758	\$22,758	65 - 77

## Sun State International, LLC TYPE C ADDITIONAL AIR CONDITIONING OPTIONS

MANUFACTURER	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S
Valeo	Digital control		\$105	\$105	29-77
Valeo	Roof mounted condensor in lieu of skirt cond upgrade		\$2,442	\$2,442	29
Valeo	Roof mounted condensor in lieu of skirt cond upgrade		\$2,684	\$2,684	65-77
Valeo	Micro channel condensor		-\$205	-\$205	29
Valeo	Micro channel condensor		-\$410	-\$410	47-77
Trans Air	Safeaire filter and module		\$192	\$192	29
Trans Air	Safeaire filter and module		\$181	\$181	47
TaransAir	Safeaire filter and module		\$374	\$374	65
Trans Air	Safeaire filter and module		\$363	\$363	71-77
Trans Air, Tulsa	Safeaire filter and module		\$192	\$192	29
Trans Air, Tulsa	Safeaire filter and module		\$181	\$181	47
Trans Air, Tulsa	Safeaire filter and module		\$374	\$374	65
Trans Air, Tulsa	Safeaire filter and module		\$363	\$363	71-77
MCC	Roof mounted condensor in lieu of skirt cond upgrade		\$3,536	\$3,536	29-47
MCC	Roof mounted condensor in lieu of skirt cond upgrade		\$7,056	\$7,056	65-77
			1		

## Sun State International, LLC TYPE D OPTIONAL AIR CONDITIONING

	FRONT ENGIN	E AC			
AC NAME	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S
					_
					_

## Sun State International, LLC TYPE D OPTIONAL AIR CONDITIONING

	REAR ENGINE AC						
AC NAME	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S		

## Sun State International, LLC TYPE D ADDITIONAL AIR CONDITIONING OPTIONS

	FRONT ENGINE AC						
MANUFACTURER	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S		

	REAR ENGINE AC							
MANUFACTURER	DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S			
1								

### Sun State International, LLC OPTIONAL ENGINE PRICING

TYPE A							
ENGINE MODEL/ DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	<b>BODY SIZE/S</b>			
TY	PE C						
ENGINE MODEL/ DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	<b>BODY SIZE/S</b>			
Cummins ISB, 240 HP, 560 lb-ft, Diesel		\$1,223	\$1,223	29 & 47			
Cummins ISB, 250 HP, 660 lb-ft, Diesel		\$344	\$344	65 & 71			
Cummins ISB, 260 HP, 660 lb-ft, Diesel		\$755	\$755	65 & 71			
Cummins ISB, 260 HP, 660 lb-ft, Diesel		\$411	\$411	77			
EV (Electric Power 2 Battery 210 Kwh) includes A/C	See Notes Appendix I	\$271,501	\$269,509	47			
EV (Electric Power 2 Battery 210 Kwh) includes A/C	See Notes Appendix I	\$272,723	\$271,292	71			
EV (Electric Power 3 Battery 315 Kwh) includes A/C	See Notes Appendix I	\$327,285	\$325,853	71			
	+						

### Sun State International, LLC OPTIONAL ENGINE PRICING - TYPE D

FRONT ENGINE											
ENGINE MODEL/ DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S							

REAR ENGINE											
ENGINE MODEL/ DESCRIPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	<b>BODY SIZE/S</b>							

### OPTIONAL TIRE INFORMATION AND PRICING ALL TYPES AND SIZES

		ALL TIPES AND SIZES		
	Su	ın State International, LLC		
Size and Body Type	Tire Manufacturer	Tire Model/Size/Load Range	NOTES	Price
29-77, Type C	Continental	HSR2, 11R22.5 G		STD
29-77, Type C	Continental	HSR2, 11R22.5 H		\$93
29-77, Type C	Continental	HSR2, 255/70R22.5 H	STD with Straight Floor	STD
29-77, Type C	Goodyear	Endurance RSA, 11R22.5 G		\$1,318
29-77, Type C	Goodyear	Endurance RSA, 11R22.5 H		\$1,684
29-77, Type C	Michelin	XZE2, 11R22.5 G		\$688
29-77, Type C	Michelin	XZE2, 11R22.5 H		\$847
29-77, Type C	Goodyear	Endurance RSA, 255/70R22.5 H	Without Straight Floor	\$1,222
29-77, Type C	Goodyear	Endurance RSA, 255/70R22.5 H	With Straight Floor only	\$1,269
29-77, Type C	Michelin	XZE, 255/70R22.5 H	With Straight Floor only	\$583
•	Michelin	XZE, 255/70R22.5 H	Without Straight Floor	\$537
		,	ű	
				<del>                                     </del>
	I		Г	

# APPENDIX G OPPTIONAL BAGGAGE COMPARTMENT INFORMATION

### Sun State International, LLC (PRICE IS ONE PER BUS)

Size	Price	С						D (FE)				D (RE)		
		29	47	65	71	77	71	77	83	89	72	78	84	
36" x 24" x 18"	\$688		Х	Χ	Х	Х								
44" x 24" x 18"	\$730		Х	Χ	Χ	Х								
54" x 24" x 18"	\$920		Х	Х	Х	Х								
66" x 24" x 18"	\$997			Χ	Х	Х								
79" x 24" x 18"	\$1,074			Х	Х	Х								
87" x 24" x 18"	\$1,147			Х	Х	Х								
91" x 24" x 18"	\$1,210			Χ	Х	Х								
114" x 24" x 18"	\$1,333				Х	Х								

Size	Price	С					D (FE)				D (RE)		
		29	47	65	71	77	71	77	83	89	72	78	84

Size	Price	С					D (FE)				D (RE)		
		29	47	65	71	77	71	77	83	89	72	78	84

### Sun State International, LLC ADDITIONAL OPTIONS

TYPE A				
OPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S

### Sun State International, LLC ADDITIONAL OPTIONS

TYP	TYPE C									
OPTION	NOTES	NON-LIFT PRICE	LIFT PRICE	BODY SIZE/S						
Bendix Advanced Collision Mitigation		STD	STD	All						
Bendix Intellipark		STD	STD	All						
Forward Hand Rail at Entrance Door		STD	STD	All						
12V Power Supply		STD	STD	All						
Naviflex Stepwell Coating		STD	STD	All						
Heated Exterior Mirrors		STD	STD	All						
Locking DEF Door		\$39	\$39	All						
Locking Battery Door		\$33	\$33	All						
Dual Forward Hand Rails at Entrance Door		\$111	\$111	All						
Telescoping Steering Column		\$251	\$251	All						
6" Driver Fan		\$73	\$73	All						
Right Side Driver Arm Rest		\$24	\$24	All						
Mud Flaps - Front		\$54	\$54	All						
Mud Flaps - Front Mud Flaps - Rear		\$54	\$54	All						
			·							
Rooftop Bus #s		\$350	\$350	All						
Route Changer Sign		\$75	\$75	All						
LED Lighted "School Bus" sign front and rear		\$1,319	\$1,319	All						
Illuminated LED Rear Warning Door Sign		\$512	\$512	All						
LED Light Above Entrance Door		\$225	\$225	All						
Downlit LED Exterior Crossview Mirrors	Not Heated	N/C	N/C	All						
LED Headlights (Includes Twilight Sensor)		\$616	\$616	All						
Polished Aluminum Wheels		\$1,038	\$1,038	All						
Chrome Grille		\$101	\$101	All						
Body Color Grille		\$125	\$125	All						
Chrome Plated Front Bumper		\$246	\$246	All						
Radiator Bug Screen, Requires STD Black Grille or Chrome Grille		\$59	\$59	All						
Bendix Fusion Collision Mitigation		\$1,636	\$1,636	All						
Bendix Tire Pressure Monitoring System (TPMS)		\$694	\$694	All						
Tag/Title Processing - County Plate		\$200	\$200	All						
Tag/Title Processing - Non-Municipality Plate		\$600	\$600	All						
Install Customer supplied 2-way Radio		\$360	\$360	All						
Install Customer supplied antenna only (GPS or Radio)		\$270	\$270	All						
BTI Seating 3-PT Seat - Replaces Std Seat		\$298	\$298	All						
IMMI 3-PT Seat - Replaces Std Seat		\$379	\$379	All						
IMMI 3-PT Track Seat - Replaces Std Seat	Requires Track Seating	N/A	\$307	All						
IMMI 3-PT Track Seat - Add On	required fractionaling	N/A	\$632	All						
BTI Seating 3-PT ICS Seat - Replaces Std Seat	+	\$514	\$514	All						
BTI Seating ICS Seat - Replaces Std Seat		\$614	\$614	All						
IMMI 36" 3-PT ICS Track Seat - Replaces Std Seat	Requires Track Seating	N/A	\$471	All						
IMMI 36" 3-PT ICS Track Seat - Add On	Requires Track Seating	\$1,005	\$1,005	All						
IMMI ICS Track Seat - Replaces Std Seat	Requires Track Seating	₩/A	\$495	All						
·	Requires track Seating									
IMMI ICS Track Seat - Add On		N/A	\$781	All						
BTI Seating: IMMI 45" Left, BTI 30" Right, 3-PT belts, per seat		\$732	N/A	All						
BTI Seating: BTI 45" Left, BTI 30" Right, Lap Belts Only, per seat		\$75	N/A	All						
Flip Seat Behind Driver - Replaces Std Seat		\$529	\$529	All						
Additional UCRA Latch, per seat		\$111	\$111	All						
Additional K/O Emergency Window, per set		\$189	\$189	All						
Additional Stationary Crash Barrier		\$195	\$195	All						
Additional Track Mounted Crash Barrier		N/A	\$282	All						
EZ Tech Laptop (diagnostic cable sold separately)		\$7,176	\$7,176	All						
Nexiq USB Link II, diag cable (connects laptop to vehicle)		\$923	\$923	All						
Rear Charging Port	EV Only	\$6,288	\$6,288	EV						
	į									

### Sun State International, LLC ADDITIONAL OPTIONS

TYPE D (FE	:)			
	<u> </u>	NON-I IFT	LIFT PRICE	BODY
OPTION	NOTES	PRICE	LIFT PRICE	SIZE/S
		TRIOL		OIZL/O

### Sun State International, LLC ADDITIONAL OPTIONS

TYPE D (RE)					
	<u> </u>	NON-I IFT	LIFT PRICE	BODY	
OPTION	NOTES	PRICE	LIFT PRICE	SIZE/S	
		TRIOL		OIZL/O	

### Sun State International, LLC EXTENDED WARRANTY OPTIONS

OPTION DESCRIPTION	ENGINE MODEL	EXTENDED COVERAGE DURATION	PRICE
		TYPE A	
		TYPE C	
Cummins, Full Engine Coverage	ISB	60 Month/150,000 mi	\$1,700
Cummins, Full Engine Coverage	ISB	60 Month/200,000 mi	\$2,000
Cummins, Full Engine Coverage	ISB	60Month/Unlimited mi	\$2,125
Cummins, Full Engine Coverage	ISB	120 Month/200K mi	\$4,350
Cummins, Full Engine Coverage	ISB	120 Month/Unlimited mi	\$5,275
Towing max benefit \$275 per incident Non Electric	IC	60 Month/Unlimited mi	\$660
Towing max benefit \$500 per incident Non Electric	IC	60 Month/Unlimited mi	\$900
IC Base Std + Extended Vehicle 60mo/100K mi only	IC	Deletes spec required 10yr/Unlimited extended warranty on specific items	-\$1,000
IC Base Std Warranty Only	IC	Deletes all spec required extended warranties	-\$3,392
Towing max benefit \$275 per incident Electric	IC	60 Month/Unlimited mi	\$1,460
Towing max benefit \$500 per incident Electric	IC	60 Month/Unlimited mi	\$1,700
		+	
		TYPE D	

(1) By taking this warranty credit, the purchasing district is declining the standard chassis warranty and the standard body warranty and will only have warranty coverage for 12 Months/12,000 Miles (NO EXCEPTIONS) from the updated in-service date of the bus.

### Sun State International, LLC - VIDEO AND GPS SYSTEMS CONTRACT OPTIONS

MANUF, MODEL	DESCRIPTION	Notes	Price
Angel Trax			
A: Vulcan V12-02-GPS	12 Ch DVR, 64 GB SD, 2- HD3600V Cameras & cables, Panic Btn, GPS antenna		\$2,608
B: Vulcan V12-03-GPS	12 Ch DVR, 64 GB SD, 2-HD3600V, 1-HD1700V Cameras & cables, Panic Btn, GPS antenna		\$2,996
C1: Vulcan V12-04-GPS	12 Ch DVR, 64 GB SD, 4-HD1700V Cameras & cables, Panic Btn, GPS antenna		\$3,388
C2: Vulcan V12-04-GPS	12 Ch DVR, 64 GB SD, 2-HD3600V, 2-HD1700V Cameras & cables, Panic Btn, GPS antenna		\$3,380
D: Vulcan V12-05-GPS	12 Ch DVR, 64 GB SD, 5-HD1700V Cameras & cables, Panic Btn, GPS antenna		\$3,772
E: Vulcan V12-06-GPS	12 Ch DVR, 64 GB SD, 1-HD3600V, 5-HD1700V Cameras & cables, Panic Btn, GPS antenna, windshied mount		\$4,202
F: Vulcan V12-07-GPS	12 Ch DVR, 64 GB SD, 1-HD3600V, 5-HD1700V, 1-HD2500V Cameras & cables, Panic Btn, GPS antenna, windshied mount, 7in monitor		\$4,970
Back-up System	7in Monitor and mount, 1-HD2500V Camera and cable		\$1,142
Auto Detect Stop Arm Camera	Stop arm camera system with Auto detection- No Driver interaction required		\$2,969
Manual Detect Stop Arm Camera	Stop arm camera system with manual detection - Driver interacton required to press event button to tag video		\$2,437
V862HC	Vulcan Series 8-Channel HD/IP DVR, 64GB SD, WiFi, G force sensor, panic button		\$1,404
VULCANV12	Vulcan Series 12 Channel HD/IP DVR, 1TB Platter drive w SD card slot, WiFi,G force, Panic Button		\$1,605
SSD500G-UPGRADE	500GB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$120
SSD2TB-UPGRADE,	2TB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$480
SSD1TB-UPGRADE	1TB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$240
HDD1TB	1TB Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$156
HDD1TB35	1TB 3.5-Inch Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$132
HDD2TB35	2TB 3.5-Inch Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$180
HDD4TB35	4TB 3.5-Inch Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$276
HDD6TB35	6TB 3.5-Inch Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$456
HDD10TB35	10TB 3.5-Inch Platter Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$720
SSD500G	500GB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$204
SSD1TB	1TB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$324
SSD2TB	2TB Solid-State Hard Drive, REQUIRES PURCHASE OF HARD DRIVE TRAY		\$588
V5HDDTRAY	Hard Drive Tray for Vulcan V5 MDVR, HDD TRAY REQUIRED FOR ALL VULCAN SERIES SPARE HARD DRIVES		\$59
V6X3HDDTRAY	Hard Drive Tray for Vulcan V5X3, V6X3 and V8X3 MDVRs, HDD TRAY REQUIRED FOR ALL VULCAN SERIES SPARE HARD DRIVES		\$84
V12HDDTRAY	Hard Drive Tray for Vulcan V12 MDVR, HDD TRAY REQUIRED FOR ALL VULCAN SERIES SPARE HARD DRIVES		\$101

V1235HDDTRAY	3.5-Inch Hard Drive Tray for Vulcan V1202 HC MNVR and V1284 HC MDVR, HDD TRAY REQUIRED FOR ALL VULCAN SERIES SPARE HARD DRIVES	\$101
SD128GB	128GB SD Solid-State Memory Card	\$34
SD256GB	256GB SD Solid-State Memory Card	\$84
SD512GB	512GB SD Solid-State Memory Card	\$143
GPSV1	Vulcan Series Passive GPS Antenna	\$250
GPSACT1	Vulcan Series Active GPS Antenna, ◆ Compatible with Vulcan Series VX7AI, V8X3 and V16-35 MDVRs	\$267
WC4G	Vulcan Series Wi-Fi Cellular GPS Tri-Mode Antenna, Wi-Fi, Cellular and Passive GPS Antenna, Roof-Mounted	\$357
TRIMDANT	Tri-Mode Roof-Mounted Antenna, Wi-Fi, Cellular and Passive GPS Antenna, Roof-Mounted	\$382
TRIMDANTV2	Tri-Mode Roof-Mounted Antenna, Wi-Fi, Cellular and Active GPS Antenna, Roof-Mounted	\$399
VULVSM	Vulcan Series External GPS Virtual Synchronized Mapping Module, ◆ TO INCLUDE GPSV1 ANTENNA & VSMLIC	\$443
VULWIFIM	Vulcan V5SD Wi-Fi Module with Internal Antenna Wire	\$141
GFACC1	External G-Force Antenna for Vulcan Series MDVRs and HCNVRs	\$118
HDWS3600	Vulcan Series HDWS3600 1080P Windshield Camera, • 3.6mm Lens with Adjustable Angle Lens Casing	\$368
HD2500WS	Vulcan Series 2500 HD Windshield Camera, • 2.5mm Lens with Fully Articulating Lens Casing, Adjustable Vertically and Horizontally at Installation	\$368
HD3600WS	Vulcan Series 3600 HD Windshield Camera, ◆ 3.6mm Lens with Fully Articulating Lens Casing, Adjustable Vertically and Horizontally at Installation	\$368
HDLP5MP-R	Vulcan Series High-Definition 5MP Right Side SAV Camera, 16mm Lens, Mounted on the Right Side of the Stop Arm and Faces Rearward	\$460
HDLP5MP-L	Vulcan Series High-Definition 5MP Left Side SAV Camera, 16mm Lens, Mounted on the Left Side of the Stop Arm and Faces the Front of the Bus	\$460
HDCOPILOTCAM	High-Definition 2.1mm 1080P Dual Windshield Camera, 2.1mm Lens (Each Camera), Windshield Mounted, 125- Degree Wide-Angle View of Vehicle Interior and Through Windshield	\$485
HD6000V	Vulcan Series Anvil 6000 HD Low Profile Camera, 6mm Lens with 360-Degree Articulating Lens Casing for Image Orientation	\$368
HD3600V	Vulcan Series Anvil 3600 HD Low Profile Camera, 3.6mm Lens with 360-Degree Articulating Lens Casing for Image Orientation	\$368
HD2500V	Vulcan Series Anvil 2500 HD Low Profile Camera, 2.5mm Lens with 360-Degree Articulating Lens Casing for Image Orientation	\$368
HD2100V	Vulcan Series Anvil 2100 HD Low Profile Camera, ◆ 2.1mm Lens with 360-Degree Articulating Lens Casing for Image Orientation	\$368

HD1700V	Vulcan Series Anvil 170-Degree HD 1080P Low Profile Camera, 1.7mm Lens with 360-Degree Articulating Lens	\$368
HD1700FL	Casing for Image Orientation  Vulcan Series Anvil 170-Degree HD 1080P Flush Mount Camera, 1.7mm Lens with Lens Casing Angle Adjustable	\$368
	at Installation  Vulcan HC Series Anvil 8000 IP Camera, 8.0mm Lens, Adjustable Lens Housing for Mounting on Either Side of	7500
IPX8000	Vehicle	\$418
IPX6000	Vulcan HC Series Anvil 6000 IP Camera, 6.0mm Lens, Adjustable Lens Housing for Mounting on Either Side of Vehicle	\$418
IPX2800	Vulcan HC Series 2800 IP Camera, 2.8mm Lens, Adjustable Lens Housing for Mounting on Either Side of Vehicle	\$418
IPSM1700	Vulcan HC Series 1700 IP Camera, 1.7mm Lens with Adjustable Lens Housing, Interior Camera	\$393
IPSM2500	Vulcan HC Series 2500 IP Camera, 2.5mm Lens with Adjustable Lens Housing, Interior Camera	\$393
IPSM3600	Vulcan HC Series 3600 IP Camera, 3.6mm Lens with Adjustable Lens Housing, Interior Camera	\$393
IPSMB2800	Vulcan HC Series 2800 IP Backing Camera, 2.8mm Lens, IP67 Rated Waterproof Exterior Camera	\$393
IPWS4000	Vulcan HC Series IPWS4000 IP Windshield Camera, 4.0mm Lens with Adjustable Angle Lens Casing, Windshield Mounted for Exterior View	\$393
IPI4000	Vulcan HC Series Anvil 4000 IP Camera, 4.0mm Lens with Fully Articulated Lens Casing, Interior Camera	\$393
IPI2500	Vulcan HC Series Anvil 2500 IP Camera, 2.5mm Lens with Fully Articulated Lens Casing, Interior Camera	\$393
VULSECKEY	Security Key USB 3.0 for Vulcan Series HCNVRs, V5, V5X3, & V6X3 MDVRs	\$112
V12SECKEY	Security Key USB 3.0 for Vulcan V12 MDVR	\$112
VULPWRKEY	Security Key USB 3.0 for Vulcan Series HC MNVRs, HC MDVRs and V16-35 MDVR, • Includes DC Power Supply for Reader	\$106
IBR600LP4	3G/4G Verizon Cellular Modem with Wi-Fi, Built in air card	\$672
IBR650LP4	3G/4G Verizon Cellular Modem, Built-in air card	\$588
SI4GM	Sierra 4G Wireless Cellular Modem, To include AT&T SIM Card	\$339
SI6GM	Sierra 4G Wireless Cellular Modem - New Generation	\$204
IPCLANCBL	Required For V5 only - Vulcan Series 6PIN DIN from IPC to LAN Cable for Vulcan Series MDVRs	\$62
RJ45PTCONV	Converter Cable for IP Camera from DIN to RJ45 for Vulcan HC Series	\$62
IPANEL1	LED Pre-Trip Inspection Module for Vulcan Series MDVRs and HCNVRs	\$200
EASYCK1	Firmware Upgrade Tool For Vulcan Series MDVRs and HCNVRs	\$87
4IPBOX	IP 4 Camera Hub for Vulcan Series V12 MDVR and V16HCNVR To include CAT5 cable	\$200
VULMSB	Vulcan MDVR Motion Sensor	\$166
VULMCB	Vulcan MDVR Motion Sensor Control Box & Motion Sensor	\$258

ADJBRWS	Adjustable Mounting Bracket for Vulcan Series HD-WS Starlight Camera Capturing Windshield View	\$141
ADJBR100	Adjustable Mounting Bracket for Vulcan Series HD-V Camera Capturing Windshield View	\$141
Gatekeeper		4
Y35 1HD, 256GB	Y35 with 1 hi-def camera with 15' harness, driver alert, 256GB SD card	\$1,913
Y35 HD-1HD, 1 TB	Y35 with 1 hi-def camera with 15' harness, driver alert, 1 TB hard drive	\$1,953
Y58-1HD, 1 TB	Y58 with 1 hi-def camera with 15' harness, driver alert, 1 TB hard drive	\$2,281
Y35	5 HD Ch DVR, SD, with driver alert button	\$1,170
Y35 HD	5 HD Ch DVR, 1 TB, with driver alert button	\$1,518
Y58 HD	8 HD Ch DVR, 1 TB, with driver alert button	\$1,846
G4-508HD4a	12 HD Ch DVR, 1 TB, with driver alert button	\$2,540
Y58 SC V3	8 Ch DVR, HD included, with driver alert button	\$2,232
Y512 SC V3	12 Ch DVR, HD included, with driver alert button	\$2,862
AD Plus with AI	Dash cam DVR with 2 cameras, SD card based DVR	\$1,563
G4-GPS A	GPS Puck antenna	\$145
G4-GPS B	GPS Puck antenna	\$158
WIFI Antenna	Dual Band WIFI Antenna and NMO with cable	\$211
Drop Mount	Camera Drop Mounts	\$193
Interior Cameras		
AHD 720 Camera	HD Camera, 720p, includes 15', 30' or 60' cable	\$334
AHD 1080 Camera	HD Camera, 1080p, includes 15', 30' or 60' cable	\$357
IP 720 Camera	IP HD Camera, 720p, includes 15', 30' or 60' cable	\$409
IP 1080 Camera	S32IP HD Camera, 1080p, includes 15', 30' or 60' cable	\$435
TW202 HD Camera	HD Windshield Camera, includes 15', 30' or 60' cable	\$401
UHD Camera	UHD camera int/ext, includes 15', 30' or 60' cable	\$833
Interior Camera	HD Interior Camera, includes 15', 30' or 60' cable	\$420
Exterior Cameras		
TXM11 camera	TXM11 Exterior HD Camera, 720p, includes 15', 30' or 60' cable	\$334
TXM12 camera	TXM12 Exterior HD Camera, 1080p, includes 15', 30' or 60' cable	\$359
TXM12 IP camera	HD IP Exterior Camera, includes 15', 30' or 60' cable	\$426
SP15 IP Camera	SP15 IP Stop arm camera with cable	\$702
SP25 IP Camera Kit	2 SP15 stop arm cameras with cables	\$1,406
Al282	Al camera int/ext, includes 15', 30' or 60' cable	\$923
Gatekeeper, Exterior Camera	HD Exterior camera, includes 15', 30' or 60' cable	\$420
Monitors, brackets and cables		
Adapter Cable	camera adapter cables	\$46

Camera harness 15'	15' camera cable	\$56
Camera harness 30'	30' camera cable	\$91
Camera harness 60'	60' camera cable	\$122
Monitor 9"	Rear View Monitor	\$596
Cable Kit	Camera cable kit	\$156
Storage		
G4-SD128GB	128GB SD card	\$173
G4-SD256GB	256GB SD card	\$308
G4-Upgrade 500GB-1TB SSD	G4-Upgrade 500GB-1TB SSD	\$194
G4-Upgrade 500GB-2TB SSD	G4-Upgrade 500GB-2TB SSD	\$589
G4-Upgrade 500GB- 4TB SSD	G4-Upgrade 500GB-4TB SSD	\$1,362
1 TB Drive	Spare hard drive	\$339
1TB SSD Drive	Spare hard drive	\$538
2 TB SSD Drive	Spare hard drive	\$933
4 TB SSD Drive	Spare hard drive	\$1,706
System Add-ons		
PaC30 Primary Mount	Passenger Counting Camera, includes cable	\$870
SV-12, 360° System	360° Exterior camera, includes cables	\$2,820
Video Display Mirror	1080p, with Lever-Lok	\$1,742
Camera Mount	Camera mount	\$150
Foot switch	Foot switch	\$227
G4-DVR-4PSWITCH	4 port switch, includes CAB000367	\$285
DVR Cover	Security Cover for DVR	\$87
Download Kits		
G4-DL Kit	Viewer Software Download Kit	\$196
G4-Connect-WiFiDongle	WIFI Dongle	\$76
Tablet	Android Tablet	\$1,069
G4 Viewer Plus	G4 Viewer Plus Software	\$0
360° Set up kit	Calibration kit, 1 required for installation of 360 system(s), 1 per install team	\$115
Mobile WiFi/Streaming Live		
BR-1 Mini with Cell Antenna	Modem with cellular antenna	\$1,330
Max BR-1 MK2 w/ Antenna	Mobile WiFi system with 5 in 1 antenna	\$2,328
In Yard Wireless		
Access Point Kit A	Access point with antenna, Installed and supported by Gatekeeper	\$900
Access Point Kit B	Access point with antenna, Installed and supported by Gatekeeper	\$1,110
Mast Equipment	Mast equipment, Installed and supported by Gatekeeper	\$612

Commissioning 1	Wireless commissioning, Installed and supported by Gatekeeper	\$600
Commissioning 2	Wireless commissioning, Installed and supported by Gatekeeper	\$1,200
Remote Commissioning	Connectivity to bring buses online once delivered, supported by Gatekeeper	\$30
REI		
HD6-600-1-1TB	6 CH HD6 DVR, 1TB Drive, 1 Cam, Cable kit, VMS software	\$1,935
HD6-600-2-1TB	6 CH HD6 DVR, 1TB Drive, 2 Cams, Cable kit, VMS software	\$2,145
HD6-600-3-1TB	6 CH HD6 DVR, 1TB Drive, 3 Cams, Cable kit, VMS software	\$2,397
HD6-600-4-1TB	6 CH HD6 DVR, 1TB Drive, 4 Cams, Cable kit, VMS software	\$2,649
HD6-600-5-1TB	6 CH HD6 DVR, 1TB Drive, 5 Cams, Cable kit, VMS software	\$2,979
HD6-600-6-1TB	6 CH HD6 DVR, 1TB Drive, 6 Cams, Cable kit, VMS software	\$3,309
HD5-1200W-5-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 5 Cams, Cable kit, VMS software	\$3,615
HD5-1200W-6-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 6 Cams, Cable kit, VMS software	\$3,867
HD5-1200W-7-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 7 Cams, Cable kit, VMS software	\$4,119
HD5-1200W-8-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 8 Cams, Cable kit, VMS software	\$4,371
HD5-1200W-9-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 9 Cams, Cable kit, VMS software	\$4,701
HD5-1200W-10-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 10 Cams, Cable kit, VMS software	\$5,031
HD5-1200W-11-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 11 Cams, Cable kit, VMS software	\$5,361
HD5-1200W-12-1TB	12 CH HD5 DVR w/ WiFi, 1TB Drive, 12 Cams, Cable kit, VMS software	\$5,691
System Options		
HD6-600W Upgrade	Upgrade HD6-600 DVR to include WiFi Capabilities	\$90
HD6-600C Upgrade	Upgrade HD6-600 DVR to include 4G Cellular Capabilities	\$330
HD5-1200WC Upgrade	Upgrade HD5-1200W DVR to include 4G Cellular Capabilities	\$270
STOPCAMKIT	Stop Arm Camera Kit	\$360
2 TB SSD	Upgrade to 2TB Solid State Drive	\$240
710784	GPS Antenna	\$168
210173	WiFi / LTE Cellular / GPS Combo Antenna	\$240
511986	Event Marker / Panic Button w/ 20FT Cable	\$90
512209	20FT Vehicle Sensor Harness	\$84
710610	WiFi Dongle - DVR	\$84
750364	End Cap Kit Front of DVR	\$66
750363	End Cap Kit Rear of DVR	\$58
710673	Lock Box for DVR	\$186
SV-360HD SYS 4	360 Degree Exterior HD Camera System W/7" Driver Monitor	\$2,880
Individual Components, instal	lation not included	
INDIVCAM	All AHD Cameras-Mini box, Wedge, Dome, windshield (1.7mm, 2.4mm, 4mm,6mm,8mm,16mm)	\$242

INDIVIPCAM	All IP Cameras(2.4mm,4mm)	\$440
512166/530165	7FT Cable, Camera to DVR, AHD or CAT6	\$40
512167/530099	10FT Cable, Camera to DVR, AHD or CAT6	\$44
512168/530166	25FT Cable, Camera to DVR, AHD or CAT6	\$50
511966	30FT Cable, Camera to DVR, AHD	\$53
512169/530167	40FT Cable, Camera to DVR, AHD or CAT6	\$58
510993	50FT Cable, Camera to DVR, AHD	\$65
512170/530168	60FT Cable, Camera to DVR, AHD or CAT6	\$71
710639	1 TB Hard Drive	\$440
710642	2 TB Hard Drive	\$740
690695	64 GB SD Card	\$127
690820	128 GB SD Card	\$176
690821	256 GB SD Card	\$332
710806	HD6-600 DVR (6 Channel)	\$1,040
710807	HD6-600W DVR (6 Channel with WiFi/GPS)	\$1,220
710609	HD5-1200W DVR (12 Channel with WiFi/GPS)	\$1,820
Safe Fleet Seon		
DH4C512	SD CARD DH4C Solid State DVR, 4 HD Channels, Audio, GPS, WiFi (AC,AN,BGN), G-Sensor, Mounting Plate, Power Harness, 512GB SD Card	\$1,413
DH4C256	SD CARD DH4C Solid State DVR, 4 HD Channels, Audio, GPS, WiFi (AC,AN,BGN), G-Sensor, Mounting Plate, Power Harness, 256GB SD Card	\$1,178
DH4C1T	SD CARD DH4C Solid State DVR, 4 HD Channels, Audio, GPS, WiFi (AC,AN,BGN), G-Sensor, Mounting Plate, Power Harness, 1TB SD Card	\$1,695
DH4C128	SD CARD DH4C Solid State DVR, 4 HD Channels, Audio, GPS, WiFi (AC,AN,BGN), G-Sensor, Mounting Plate, Power Harness, 128GB SD Card	\$1,025
DH4H500	HDD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB HDD	\$1,236
DH4H2T0	HDD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB HDD	\$1,621
DH4H1T0	HDD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB HDD	\$1,369
DH4S500	SSD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB SSD. GPS and WiFi require external antenna, sold separately	\$1,953
DH4S4T0	SSD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 4TB SSD. GPS and WiFi require external antenna, sold separately	\$3,008

DH4S2T0	SSD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB SSD. GPS and WiFi require external antenna, sold separately	\$2,552
DH4S1T0	SSD DH4 DVR, 4 HD Channels, Audio, GPS, WiFi (AC, AN, BGN), Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB SSD	\$2,141
WT2E20S20G6	DH4 DVR - Wire bundle with adapter harness, RGY-Button and interconnect cable 20 ft., 5 signal inputs 20 ft., GPS antenna magnetic mount 20 ft.	\$182
DH6H500-M	HDD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB HDD	\$1,809
DH6H2T0-M	HDD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB HDD	\$2,179
DH6H1T0-M	HDD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB HDD	\$1,932
DH6S500-M	SSD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB SSD	\$2,187
DH6S4T0-M	SSD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 4TB SSD	\$3,095
DH6S2T0-M	SSD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB SSD	\$2,679
DH6S1T0-M	SSD DH6 DVR, 6 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 6CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB SSD	\$2,309
DH8H500-M	HDD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB HDD	\$2,094
DH8H2T0-M	HDD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB HDD	\$2,360
DH8H1T0-M	HDD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB HDD	\$2,217
DH8S500-M	SSD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 500GB SSD	\$2,375
DH8S4T0-M	SSD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 4TB SSD	\$3,845

DH8S2T0-M	SSD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 2TB SSD	\$3,187
DH8S1T0-M	SSD DH8 DVR, 8 HD Channels, Audio, GPS + Antenna, WiFi (AC, AN, BGN), 8CH Breakout Harness with 2x3 Video Connectors, Security Front Cover with Lock Set, Mounting Plate, Power Harness, 1TB SSD	\$2,616
WT2E20S20G0	DH6 & DH8 Wire bundle with adapter harness, RGY-Button and interconnect cable 20 ft., 5 signal inputs 20 ft.	\$160
SDCARD256	256GB SD Card for use with all TH & DH Series DVR's to back up DVR Video at Half Resolution	\$341
SDCARD128	128GB SD Card for use with all TH & DH Series DVR's to back up DVR Video at Half Resolution	\$141
HD3QxxA75	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR TDN, 75' harness, to use with DH4C, DH4, DH6 and DH8 DVRs	\$422
HD3QxxA50	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR TDN, 50' harness, to use with DH4C, DH4, DH6 and DH8 DVRs	\$389
HD3QxxA20	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR TDN, 20' harness, to use with DH4C, DH4, DH6 and DH8 DVRs	\$358
CHQ-MP6A30	HD3Q mounting post, 6 inch, 30 degree angle	\$152
HD2QxxAI75	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR, TDN, 75' harness - to use with DH4C, DH4, DH6 and DH8 DVRs	\$410
HD2QxxAI50	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR, TDN, 50' harness - to use with DH4C, DH4, DH6 and DH8 DVRs	\$378
HD2QxxAI20	HD 1080P Camera, Dome, Lens TBD, internal, audio, IR, TDN, 20' harness - to use with DH4C, DH4, DH6 and DH8 DVRs	\$346
HD2Q-MP6A30	HD2Q and HD1Q0xAI2 mounting post, 6 inch, 30 degree angle	\$152
HD3U01AN75	HD 1080P Camera, Ultra Wide, 1.72mm, internal, audio, IR, 75' harness? to use with DH4C, DH4, DH6 and DH8 DVRs	\$467
HD3U01AN50	HD 1080P Camera, Ultra Wide, 1.72mm, internal, audio, IR, 50' harness? to use with DH4C, DH4, DH6 and DH8 DVRs	\$435
HD3U01AN20	HD 1080P Camera, Ultra Wide, 1.72mm, internal, audio, IR, 20' harness? to use with DH4C, DH4, DH6 and DH8 DVRs	\$402
HD3SxxEI75	HD Camera, Wedge,Stop Arm,Lens TBD,external,IR, 75' harness,to use with DH4, DH6 and DH8 DVRs	\$554
HD3SxxEI50	HD Camera, Wedge,Stop Arm, Lens TBD,external,IR, 50' harness,to use with DH4, DH6 and DH8 DVRs	\$522
HD3SxxEI20	HD Camera, Wedge, Stop Arm, Lens TBD, external, IR, 20' harness, to use with DH4, DH6 and DH8 DVRs	\$491

C3Q9PD03AF-BK	All Four Parts Required When Quoting Super Bus Concept - IP Camera for forward-facing (windshield) applications, PoE, dome, black, 3MP progressive scan, 2.8 mm lens size, interior, IR disabled, audio - to use with DH6 & DH8 DVR's	\$460
MSS-4030-20-02-ETH-WP	ETHERNET CABLE, 20FT, CAT6	\$30
DH-POEKIT48-A	DH6 and DH8 48V PoE Kit for (1) IP camera. DH6 and DH8 support a single C3W9PD, C3Q9PD, CHW8PD, C12F2PD (via RTSP) or C8Q2PD (via RTSP) camera.	
C3Q-MP6A30	C3Q9PDxxAF-BK Mounting Post, 6 inch	\$140
C12F2PD02A50	360° Fisheye IP Camera, 9MP, 2.1 mm lens size, PoE, white, interior, audio, 50 ft. harness - to use with TH8, NH16K and NH16 DVRs	\$1,210
C12F2PD02A20	360° Fisheye IP Camera, 9MP, 2.1 mm lens size, PoE, white, interior, audio, 20 ft. harness - to use with TH8, NH16K and NH16 DVRs	\$1,194
HD3WxxEI75	HD Camera, Wedge, Lens TBD, external, IR, 75' harness, to use with DH4, DH6 and DH8 DVRs	\$500
HD3WxxEI50	HD Camera, Wedge, Lens TBD, external, IR, 50' harness, to use with DH4, DH6 and DH8 DVRs	\$480
HD3WxxEI20	HD Camera, Wedge, Lens TBD, external, IR, 20' harness, to use with DH4, DH6 and DH8 DVRs	\$459
HD2D0202AI	Dual Lens Windshield Cam, 1080p, 2.1mm lens forward/inward, mic (Select Cable Below)	\$452
HEHD50	ASSY, CBL, HD, 2X3Micro-Fit M-M, 50ft for AHD Wedge and Dome Cameras	\$62
HEHD20	ASSY, CBL, HD, 2X3Micro-Fit M-M, 20ft for AHD Wedge and Dome Cameras	\$29
HEHD10	ASSY, CBL, HD, 2X3Micro-Fit M-M, 5ft for AHD Wedge and Dome Cameras	\$33
HEHD05	ASSY, CBL, HD, 2X3Micro-Fit M-M, 10ft for AHD Wedge and Dome Cameras	\$24
inView360HD-T5-LinkUp	inView360HD System Kit + Connection Kit	\$2,945
HDM-7IN	7" HD Touch Screen Monitor	\$590
060-1010	DVR Power Takeoff Cable Adapter with 5 Inch Power Flying Leads	\$27
inView360HD-Conn-Kit	inView 360HD Connection Kit	\$54
PSA2S	Predictive Stop Arm, 2 Radars, 2 Horns	
MSS-4030-20-02-ETH-WP	ETHERNET CABLE, 20FT, CAT6	\$30
MSS-4030-05-01-ETH	S-4030-05-01-ETH ETHERNET CABLE, STANDARD 5FT, CAT5	

DAM-1-07-MF	Rear Vision LCD Monitor, 7? Display, Four Trigger Inputs, Four Looping Video Inputs (SD Analog, AHD 720P, and AHD 1080P Supported), Harness Supports 2x3 MicroFit Connectors, Includes U-Bracket Mount and Sunshade.	\$743
VMC5B	vMax Commander 5.0: web-based wireless and automatic video management software to monitor video system health, automatically download video alarms, search video by time and location, and display historical GPS tracks of the vehicles in the fleet.	\$5,402
SRLAC07NP	SmartReach Lite,2.4/5GHz,ANT,No POE, One Time Activation Included VMC5V	\$555
SRLAC07	SmartReach Lite,2.4/5GHz,ANT, One Time Activation Included VMC5V	\$657
SRB2AC121212	SmartReach Access Point, 2RD, 2.4Ghz 3x5dBi Omni Antenna, 5Ghz 3x7dBi Omni Antenna	\$2,657
SRB1AC090909	SmartReach Access Point,1RD,2.4/5.8 Ghz,3x10dBi Mini Antenna	\$2,265
SRLBAC09-SV	Smart-Reach Lite, 5G, Supervisor Vehicle Kit	\$1,223
SRC-ROUTER-1	Smart Reach All-In-One Router supports the following via wireless or cellular connectivity:  Mobile Hotspot, Wireless video download, Live GPS, Live Streaming Includes Harness, 6-in-one Dome Antenna- North America LTE - Customer DATA PLAN ? No Safe Fleet SIM included.  For Safe Fleet hotspot support, SRH-R0T60G-Y1 and SRH-ROUTER-S-1 need to be acquired. No Safe Fleet hotspot is provided with a customer Data Plan. For Live GPS and Live Streaming, a Safe Fleet DVR and the corresponding Services must be acquired.  Mobile Hotspot, Wireless video download, Live GPS, Live Streaming Includes Harness, 6-in-one Dome Antenna- North America LTE - Customer DATA PLAN ?No Safe Fleet SIM included. For hostpot support, SRH-R0T60G-Y1 needs to be acquired.	\$1,468
LIVESTREAM-Y1	Live Streaming software subscription includes 1st year of set-up, activation, hosting, licensing and support per vehicle- Renewal Fees Apply	\$50
VLP-Y1	Live GPS software subscription includes 1st year of hosting, licensing and support per vehicle	\$130
CONTACT-TRACING-MDT	CONTACT-TRACING-W/MDT Includes cellular data, equipment & all-in-one software for: Live GPS (Tablet Hardware) Student Tracking & Reporting (Tablet & RFID hardware) INCLUDES VLP-Y1 ACTIVATION Routh Path Parent Notification App & Service All-in-One Web-Based Software Interface	\$1,929

_				
CONTACT-TRACING-LMU-Y1	All components of VPL-LMUE1Y1 & VML-LMU-STR1UY1 + ROUTE-SBHUB-Y1 + Route-Path-Y1 LMU AVL Tracking device for GPS live tracking vMax live plus. Includes harness One year of E-SIM Teal Data Plan and vMax Live plus license VLP-Y1 vMax Trac for Student Tracking with 1 year of service, operates with LMU School Bus Hub - parent notification software subscription includes 1st year of hosting, licensing and support per vehicle- Renewal Fees Apply Path routing software subscription that includes 1st year of hosting, licensing and support per vehicle- Renewal Fees Apply	\$1,299		
STUDENT-CONTACT-TRACING	PRE-RELEASE -STUDENT-CONTACT-TRACING Includes equipment & all-in-one software for: Live GPS, Student			
VLP-LMUE1Y1	LMU, for vMAX Live plus GPS tracking PWR/SIG DVR HRNS, Internal antenna, E-SIM TEAL ,1GB/YEAR - One YR subscription	\$569		
HDD-DOCK3	Media cartridge docking station with USB 3 output, for compatible DVR	\$328		
HDD3-STB-LMK	Software kit Includes: vMax View Software, Handheld mouse, 5.6 inch monitor, HDD-DOCK3 USB Docking			
ANTK-W22W6	Dual Band White WiFi Antenna Kit with Two Cables at 3 m Length plus 3 m Antenna Extension Cables and RP-			
EMRED-Y1	Desktop Software, Redaction Module, License, Activation	\$0		
EM-DESKTOP	M-DESKTOP Desktop Software, Evidence Manager, Video and Evidence Playback and Processing, License, Perpetual			
Safety Vision				
FL-SV-4401-256GB-1C	SV Observer 4401 HVR w/1 Camera. 256GB SD Storage, GPS, Event Marker & Wiring	\$1,365		
FL-SV-4401-256GB-2C	SV Observer 4401 HVR w/2 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring	\$1,611		
FL-SV-4401-256GB-3C	SV Observer 4401 HVR w/3 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring	\$1,845		
FL-SV-4000-256GB-4C	SV Observer 4401 HVR w/4 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring	\$2,015		
FL-SV-4401-2x256GB-1C	-SV-4401-2x256GB-1C SV Observer 4401 HVR w/1 Camera. 256GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card			
FL-SV-4401-2x256GB-2C	-SV-4401-2x256GB-2C SV Observer 4401 HVR w/2 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card			
FL-SV-4401-2x256GB-3C	/-4401-2x256GB-3C SV Observer 4401 HVR w/3 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card			
FL-SV-4000-2x256GB-4C	SV Observer 4401 HVR w/4 Cameras. 256GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card	\$2,124		
FL-SV-4401-512GB-1C	SV Observer 4401 HVR w/1 Camera. 512GB SD Storage, GPS, Event Marker & Wiring	\$1,407		

FL-SV-4401-512GB-2C	SV Observer 4401 HVR w/2 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring	\$1,653
FL-SV-4401-512GB-3C	SV Observer 4401 HVR w/3 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring	\$1,893
FL-SV-4000-512GB-4C	SV Observer 4401 HVR w/4 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring	\$2,057
FL-SV-4401-2x512GB-1C	SV Observer 4401 HVR w/1 Camera. 512GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card	\$1,562
FL-SV-4401-2x512GB-2C	SV Observer 4401 HVR w/2 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card	\$1,809
FL-SV-4401-2x512GB-3C	SV Observer 4401 HVR w/3 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card	\$2,051
FL-SV-4000-2x512GB-4C	SV Observer 4401 HVR w/4 Cameras. 512GB SD Storage, GPS, Event Marker & Wiring. w/Spare SD Card	\$2,214
FL-SV-4112-1TB-3C	SV Observer 4112 HVR w/3 Cameras. 1TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$2,510
FL-SV-4112-1TB-4C	SV Observer 4112 HVR w/4 Cameras. 1TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$2,749
FL-SV-4112-1TB-5C	SV Observer 4112 HVR w/5 Cameras. 1TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$2,996
FL-SV-4112-1TB-6C	SV Observer 4112 HVR w/6 Cameras. 1TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$3,222
FL-SV-4112-1TB-7C-2E	SV Observer 4112 HVR w/7 Cameras (2 Exterior Stop Arm), 1TB HDD w128GB SD BU, GPS, Event Marker &	
FL-SV-4112-1TB-8C-2E	SV Observer 4112 HVR w/8 Cameras (2 Exterior Stop Arm). 1TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$3,727
FL-SV-4112-1TBSSD-3C	SV Observer 4112 HVR w/3 Cameras. 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$2,611
FL-SV-4112-1TBSSD-4C	SV Observer 4112 HVR w/4 Cameras. 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$2,850
FL-SV-4112-1TBSSD-5C	SV Observer 4112 HVR w/5 Cameras. 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$3,097
FL-SV-4112-1TBSSD-6C	SV Observer 4112 HVR w/6 Cameras. 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$3,333
FL-SV-4112-1TBSSD-7C-2E	SV Observer 4112 HVR w/7 Cameras (2 Exterior Stop Arm). 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$3,590
FL-SV-4112-1TBSSD-8C-2E	SV Observer 4112 HVR w/8 Cameras (2 Exterior Stop Arm). 1TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$3,829
FL-SV-4112-2TB-3C	SV Observer 4112 HVR w/3 Cameras. 2TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$2,678
FL-SV-4112-2TB-4C	SV Observer 4112 HVR w/4 Cameras. 2TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$2,917
FL-SV-4112-2TB-5C	SV Observer 4112 HVR w/5 Cameras. 2TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$3,164
FL-SV-4112-2TB-6C	SV Observer 4112 HVR w/6 Cameras. 2TB HDD w128GB SD BU, GPS, Event Marker & Wiring	\$3,390
FL-SV-4112-2TB-7C-2E	SV Observer 4112 HVR w/7 Cameras (2 Exterior Stop Arm), 2TR HDD w128GR SD RIL GPS, Event Marker &	
SV Observer 4112 HVR w/8 Cameras (2 Exterior Stop Arm). 2TB HDD w128GB SD BU, GPS, Event Marker & Wiring		\$3,895

FL-SV-4112-2TBSSD-3C	SV Observer 4112 HVR w/3 Cameras. 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$2,804
FL-SV-4112-2TBSSD-4C	SV Observer 4112 HVR w/4 Cameras. 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	\$3,043
FL-SV-4112-2TBSSD-5C	SV Observer 4112 HVR w/5 Cameras. 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	
FL-SV-4112-2TBSSD-6C	SV Observer 4112 HVR w/6 Cameras. 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	
FL-SV-4112-2TBSSD-7C-2E	-SV-4112-2TBSSD-7C-2E SV Observer 4112 HVR w/7 Cameras (2 Exterior Stop Arm). 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	
FL-SV-4112-2TBSSD-8C-2E	L-SV-4112-2TBSSD-8C-2E SV Observer 4112 HVR w/8 Cameras (2 Exterior Stop Arm). 2TB SSD w128GB SD BU, GPS, Event Marker & Wiring	
FL-SV-41-UPS	SV UPS Battery Back-up. Option for SV 4401 & 4112 Observers	\$329
FL-41-ANT-Female	SV 802.11 Antenna for Observer 4112 HVR using internal Wifl Module	\$312
FL-SV-ANT2400-5500	SV 802.11 Antenna for Observer 4401 HVR using internal Wifi Module	\$312
FL-SV-WIFI-MOXKIT-B	SV Industrial 802.11 Wireless Radio w/Antenna & Mounting Bracket	\$900
FL-SB-TVMTOTAL-AHD	SV School Bus Total View Observation System with DVR Recording conn. Comes w/Passenger Mirror/Monitor	\$3,173
FL-SV-PEP4401-C3	PepWave Max BR1 Cellular Modem - 1yr Primecare. With Installation Kit, wiring & antenna	\$996
FL-SV-PEP4401-WC3		
FL-SV-WIFICELL2-KT	IBR900 Cradlepoint Mobile Router, Wifi & Cellular w/Installation kit, wiring & Antenna	\$1,515
FL-SV-DXAP	Wireless Diagnostic Tool & DVR Setup for Tablet / PC	\$125
Synovia		
FLSTC GPS	Synovia Core GPS Hardware Kit for ATT/Verizon	\$943
FLSTC ENGD	JPOD	\$384
On-Board Mobile Data Termin	nal Options	
FLSTC OP	Operator Panel and Kit	\$464
FLSTC CT	Color Tablet and Kit (Tethered 7P)	\$922
On-Board Card Rearders for St	tudent Ridership	
FLSTC BCR	Barcode Reader Kit (laser scan)	\$614
Software Options		
FLSTC SLSGPS	Synovia Silverlining GPS Fleet Management Software - Annual License	\$270
FLSTC SLSEGS	Synovia Silverlining Engine Diagnostics Software - Annual License	\$54
Zonar		
Zonar, V4015-H	V4+Connect kit (cables and mounts included)	\$1,138
Zonar, V4201-H	V4 TCU Kit, Includes Wiring and brackets	\$426

V4 TCU Kit, Includes Wiring and brackets	\$1,138
Connect Tablet Kit, Includes tablet, cable and mount	\$896
Samsung Galaxy Tab Active2 Kit, Includes tablet, cables and mount	\$896
Z pass Kit, RFID reader for student cards- Zpass service required	
Zonar Coach Camera	\$238
2010 EVIR Handheld device for Electornic Vehicle Inspection	\$319
Driver/Operator RFID card, per card	\$6
Student RFID card, per card	\$3
rations subscriptions for Zonar equipment sold seperately.	
Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 12 months service	\$2,065
Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 24 months service	\$2,972
Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 60 months service	\$4,708
Rosco Safe-T-Scope 270 degree Mor-Vision w-7in Mirror monitor, lever-lock	\$2,443
Rosco Safe-T-Scope 270 degree Mor-Vision w-7in stand alone monitor	\$2,084
Rosco backup camera w-7in mirror monitor in 6x30 mirror	\$1,310
Backup Cam Mirror Mon Rosco backup camera w-7in mirror monitor in 6x30 mirror  Backup Cam SA Mon Rosco backup camera w-7in standalone monitor	
	Connect Tablet Kit, Includes tablet, cable and mount  Samsung Galaxy Tab Active2 Kit, Includes tablet, cables and mount  Z pass Kit, RFID reader for student cards- Zpass service required  Zonar Coach Camera  2010 EVIR Handheld device for Electornic Vehicle Inspection  Driver/Operator RFID card, per card  Student RFID card, per card  ations subscriptions for Zonar equipment sold seperately.  Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 12 months service  Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 24 months service  Kajeet Onboard WiFi Solution, includes router, ext antenna, activation and 60 months service  Rosco Safe-T-Scope 270 degree Mor-Vision w-7in Mirror monitor, lever-lock  Rosco Safe-T-Scope 270 degree Mor-Vision w-7in stand alone monitor  Rosco backup camera w-7in mirror monitor in 6x30 mirror

BIDDERS NOTES				
Base Bus	Includes: Integrated Dash A/C, Advanced Bendix collision mitigation, Bendix Intellipark, Telematics with over air programming and 5yr data, Forward handrail at entry, 12V Power Supply, Naviflex Stepwell Coating, Heated Exterior Mirrors			
Adjustable Pedals	Price for Adjustable pedals option includes Telescoping steering column			
Straight Floor	Price for Straight floor option includes air ride rear suspension and low pro tires.			
Rear Underseat Heater	WC Lift equipped buses may require rear wall mount heater.			
Spare Disc Wheel	Availability of this option is limited to one per bus purchased.			
Luggage /Seating/Lift Equipped Buses	Districts are encouraged to contact Sun State International when selecting non standard seating options, luggage compartments or wheelchair lift buses to ensure compatibility with other required equipment and desired seating arrangements.			
Track Seating Seats	Availability of track seating seats is limited to the quantity of seats that can be mounted in the unit ordered.			
Alternator	Standard Alternator for the base bus with Cummins ISB is 325 AMP.			
EV (electric powered option)	EV electric power option includes factory A/C, Kajeet Onboard WiFi, OnCommand telematics, Air Disc brakes, Air Ride rear suspension, Aluminum Wheels, Telescoping Steering, track seating, front charge port and additional delivery. 47 Capacity units also include Straight floor and low profile tires. Does not include heated mirrors, Intillipark, or collision mitigation.			
Video and GPS Systems	Video and GPS pricing includes installation except as noted.			
	I			



September 18, 2022

State of Florida

Department of Education

Tallahassee, FL

Re: Transmittal Letter, ITB 2023-02

This is to certify that Mike McCullough, Executive Operations Manager for Sun State International (Federal Tax id# 59-3750718, DUNS # 07-173-0477), has the authority to represent Sun State International Trucks, LLC in all matters related to the enclosed proposal.

Sun State International Trucks, LLC designates the following person to be contract manager for this proposal. Contact information is as noted below:

Mike McCullough
Executive Operations Manager
Sun State International
6020 Adamo Drive
Tampa, FL 33619
Ph (800) 741-7566

E-mail: Mike.Mccullough@sunstateintl.com

I have read, understand and agree to the provisions of ITB 2023-02 and certify that equipment to be provided via this proposal meets the requirements of the ITB.

I certify that Sun State International is licensed and registered to do business in Florida and is registered on the MyFloridaMarketPlace website and a current W-9 is registered with the Department of Financial Services.

Also included is Sun State International's Minority Business Enterprise certificate with Attachment 4.

Respectfully,

Mike McCullough

**Executive Operations Manager** 

men

Sun State International Trucks

**ATTACHMENT '2'** 

### **DISCLOSURE STATEMENT**

(Rev. 07/02)			
PARTNERSHIP OR INDIVIDUAL			
I hereby certify that I, if an individe	ual, or each of us, if a partnership, doing l	business as	
(Name of Individual or Pai (am)(is) not now involved in nor have Commissioner of Education, the Dep Bureau Chief within the Florida Depa	e I ever engaged in any private business ven outy Commissioner of Education, any Associa	ture or enterprise, directly or indirectly, with the ate Commissioner of Education, Division Director of	or
above designated persons or any oth appointment of	her employee of the Florida Department of Ed	in my or our behalf has requested that any of the ducation exert any influence to secure the under this proposed agreement.	
(Name of Individu	ual or Partnership)		
		(1)	
		Signature	
		Signature	
		Signature	
COMPANY OR CORPORATION			
I hereby certify that neither I nor a	Sun ny owner, officer, director, or shareholder	State International Trucks,	. L
Florida		(Name of Corporation (Company))	
(Name of State of Inc.)	(2) corporation, licensed to do busi	iness in Florida, is presently involved in	
or has engaged in any private busine	ess venture or enterprise, directly or indirectly cociate Commissioner of Education, Division	y, with the Commissioner of Education, the Deputy Director, or Bureau Chief within the Florida	
corporation or any of its owners, offic employee of the Florida Department (	owner, officer, director, or shareholder of this ers, directors, or shareholders has requested of Education exert any influence to secure the tional Trucks, LLC	corporation or anyone acting on behalf of this d that any of the above designated persons or any e appointment of under this proposed agreement.	
(Company)	(Corporation)	under this proposed agreement.	
		(3) mit men	ber .
		Signature Executive Operations Manage	r
	•	Title	

(1) If a partnership, each partner must sign & execute.

(2) If the company is not incorporated, insert "not incorporated" in this space.

(3) If incorporated, this statement is to be executed by the same person who will execute the contract, if awarded.

### **ATTACHMENT '3'**

### DRUG-FREE WORKPLACE

(will be considered in case of identical tie Bids)

Preference shall be given to businesses with drug-free workplace programs. Whenever two or more Bid Responses which are equal with respect to price, quality, and service are received by the State or by any political subdivision for the procurement of commodities or contractual services, a Bid Response received from a business that certifies that it has implemented a drug-free workplace program shall be given preference in the award process. Established procedures for processing tie Bid Responses will be followed if none of the tied vendors have a drug-free workplace program. To have a drug-free workplace program, a business shall:

- 1) Publish a statement notifying employees that the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance is prohibited in the workplace and specifying the actions that will be taken against employees for violations of such prohibition.
- 2) Inform employees about the dangers of drug abuse in the workplace, the business's policy of maintaining a drug-free workplace, any available drug counseling, rehabilitation, and employee assistance programs, and the penalties that may be imposed upon employees for drug abuse violations.
- 3) Give each employee engaged in providing the commodities or contractual services underbid a copy of the statement specified in subsection (1).
- In the statement specified in subsection (1), notify the employees that, as a condition of working on the commodities or contractual services that are underbid, the employee will abide by the terms of the statement and will notify the employer of any conviction of, or plea of guilty or nolo contendere to, any violation of Chapter 893 or any controlled substance law of the United States or any state, for a violation occurring in the workplace no later than five (5) days after such conviction.
- 5) Impose a sanction on, or require satisfactory participation in a drug abuse assistance or rehabilitation program if such is available in the employee's community by any employee who is so convicted.
- 6) Make a good faith effort to maintain a drug-free workplace through implementation of this section.

As the person authorized to sign the statement, I certify that this firm complies fully with the above requirements.

Vendor's Signature

### **ATTACHMENT '4'**

Bureau of Contracts, Grants & Procurement

325 West Gaines Street, room 332

Tallahassee, Florida 32399-0400

### STATE OF FLORIDA DEPARTMENT OF EDUCATION MINORITY SUBCONTRACTORS UTILIZATION SUMMARY

The Department's Supplier Diversity initiative strives to ensure the promise of Florida's future is shared by all of its residents, regardless of race, ethnicity, disability, neighborhood, or background. To that end, the Department is dedicated to support, track and increase its small, minority-, women-, and service-disabled veteran business enterprise spending with prime contractors and subcontractors. This form was developed to assist in these efforts.

The Prime Contractor shall report all small, minority-, women-, and service-disabled veteran business enterprise Subcontractors, identifying the Name, Address, Type of Certification, and Dollar Amount on the form below. The Prime Contractor shall submit this form with each invoice submitted for payment, whether or not funds have been spent with a small, minority-, women-, and service-disabled veteran business enterprise Subcontractor for the period covered by the invoice. The Office of Supplier Diversity, Florida Department of Management Services will assist in furnishing names of qualified minorities. The Office of Supplier Diversity can be reached at (850/487-0915); the Internet Web address is <a href="http://dms.myflorida.com/other-programs/office-of-supplier-diversity-osd">http://dms.myflorida.com/other-programs/office-of-supplier-diversity-osd</a>.

PRIME CONTRACTOR: Sun State Interna	tional Tri	acks, LL(	<u> </u>	
CONTRACT NO.: ITB 2023-02				
CONTRACT TITLE: Type A,C and D School	ol Buses a	nd Optio	nal Equip	ment
MBE CONTRACTORS Full Name, Address, Telephone Number	State Certified	Non- Certified	Non-Profit	Dollar Amount
See Attached				
Certified True and Correct by:	s	Total A Submit Report to	mount \$ o:	
Trick Me	N	ls. ReGina Reg	gister	

For additional information, you may call Ms. Register at 850/245-9173 or email regina.register@fldoe.org


**Prime Contractor** 

10/18/2022

Title

Date

Executive Operations Manager



## Sun State International Trucks, LLC



# \* Nationally certified by the: FLORIDA STATE MINORITY SUPPLIER DEVELOPMENT COUNCIL

\*NAICS Code(s): 423110

\* Description of their product/services as defined by the North American Industry Classification System (NAICS)

Beatrice Louissaint, President & CEO Blenna Certificate Number FL03197 NMSDC CEO and President Ying McGuire **Expiration Date Issued Date** 12/31/2021 12/31/2022

By using your password (NMSDC issued only), authorized users may log into NMSDC Central to view the entire profile: http://nmsdc.org

Certify, Develop, Connect, Advocate.

\* MBEs certified by an Affiliate of the National Minority Supplier Development Council, Inc.®

### **ATTACHMENT '5'**

### VENDOR CERTIFICATION REGARDING SCRUTINIZED COMPANIES LISTS

Vendor FEIN: 5	dor Name: Sun State Inter:	ke McCullough
Vendor's Authori	zed Representative Name and Title: $\overline{\mathbb{E}^{\Sigma}}$	secutive Operations Manager
Address: 6020	O Adamo Dr	
City: Tampa	State:	Zip: 33619
Phone Number:	813-226-7330	
Email Address:	mike.mccullough@sunsta	teintl.com
A - 41		
section entitled "I List or the Scrutir	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir	ent, I hereby certify that the company identified above in the on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant ertification may subject a company to civil penalties, attorney's
section entitled "I List or the Scrutir to section 287.13	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false co	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant
section entitled "I List or the Scrutir to section 287.13 fees, and costs.  Certified By: 1	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false condition of the above reference of the sign on behalf of the above reference.	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant ertification may subject a company to civil penalties, attorney's edd company.
section entitled "I List or the Scrutir to section 287.13 fees, and costs.  Certified By: 1	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false centre of the sign on behalf of the above referenture Print Name and Title:	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant entification may subject a company to civil penalties, attorney's ed company.  Cullough
section entitled "I List or the Scrutir to section 287.13 fees, and costs.  Certified By: 1	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false centre of the sign on behalf of the above referenture Print Name and Title:	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant ertification may subject a company to civil penalties, attorney's ed company.
section entitled "I List or the Scrutir to section 287.13 fees, and costs.  Certified By: 1	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false centre of the sign on behalf of the above referenture Print Name and Title:	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant entification may subject a company to civil penalties, attorney's ed company.  Cullough
section entitled "I List or the Scrutir to section 287.13 fees, and costs.  Certified By: 1	Respondent Vendor Name" is not listed nized Companies with Activities in the Ir 5, Florida Statutes, submitting a false centre of the sign on behalf of the above referenture Print Name and Title:	on either the Scrutinized Companies with Activities in Sudan an Petroleum Energy Sector List. I understand that pursuant entification may subject a company to civil penalties, attorney's ed company.  Cullough

### CONTRACT 2023-02<u>ATTACHMENT '6'</u>

THIS CONTRACT FOR TYPE A, TYPE C AND TYPE D SCHOOL BUSES AND OPTIONAL EQUIPMENT, BID NO: ITB 2023-02, by and between the department, 325 West Gaines, Suite 834, Tallahassee, Florida 32399-0400, and

WITNESSETH.									
for-profi	t corporatio	n registered in Florida, ea	ch referred to h	erein as	"Party,"	and collectively referred to	as the	"Parties,"	-
Sun	State	International	Trucks,	LLC			. the	contractor.	a

WHEREAS, the Department desires to provide eligible users, defined herein, with various Type A, Type C and Type D School Buses and Optional Equipment (defined herein as "Vehicles"), through the use of a state term contract pursuant to rule 60A-1.001, F.A.C.; and section 1006.27, F.S., and

WHEREAS, the Department solicited responses to an Invitation to Bid No: ITB 2023-02(ITB) to prospective contractors of said Vehicles; and

WHEREAS, the contractor responded to the ITB and desires to provide said Vehicles; and, unto each other;

NOW THEREFORE, in consideration of the premises, terms and conditions set forth herein, the Parties execute this contract so same becomes binding and enforceable by and through the Parties and their assigns, and agree heretofore:

### SCOPE OF WORK

The intent of these specifications is to set forth and convey to prospective bidders the general type, character, performance and quality of the Vehicles desired by the Department and school districts. The contractor is authorized to provide Vehicles to any and all eligible users in the State of Florida. The Parties agree that the laws and rules that apply to this contract shall be for those applicable to contracts in excess of Category Two, or \$35,000, as defined in chapter 287.017, F.S.

Pursuant to Section 7.10 of Bid No: ITB 2023-02, the following documents are hereby incorporated by reference:

- Department contract
- Any addenda to Bid No: ITB 2023-02
- ITB No: 2023-02
- Award Letter

**DEPARTMENT** 

Contractor's response

IN WITNESS WHEREOF, the Parties hereto have caused this contract For Type A, Type C and Type D School Buses and Optional Equipment, Bid No: ITB 2023-02, to be executed on the dates shown below their respective signatures.

Signature	Signature Signature
Print Name:	Print name: Mike McCullough
Title:	Title: Executive Operations Manager
Date:	Date: 10/18/2022

CONTRACTOR

### **ATTACHMENT 7 - BIDDER REPRESENTATION**

TO: Commissioner Manny Diaz, Jr. Florida Department of Education

Tallahassee, Florida 32399-0400

I, the bidder, hereby represent that the specifications of school bus equipment furnished under terms of this bid will comply with the *National School Transportation and Procedures, Revised 2015*, and the *Florida School Bus Specifications, Effective January 2023*, as represented by the manufacturer to the Commissioner of the Florida Department of Education, State of Florida.

### NOTES:

- 1. Do not include excise tax in price schedule. A tax exemption certification or number will be furnished by the purchasing agency.
- 2. All prices must be quoted in even dollar amounts.
- 3. Twenty-nine capacity Type C buses shall be offered with both front-mounted and rear-mounted lift availability.
- 4. All standard and optional tires bid shall be all-wheel position highway rib radials.

  Comments regarding production schedules and remarks (for informational purposes only):

  Company: Sun State International Trucks, LLC

  By: Mike McCullough

  Address: 6020 Adamo Dr Tampa FL 33619

  Telephone: 813-226-7330

  FEIN: 59-3750718

  Signature: Date: 10/18/2022

### ATTACHMENT 8 - PURCHASE ORDER/CUSTOMER CONTACT PREFERENCE INFORMATION

Please provide pertinent contact information for your company to be used on all purchase orders for buses purchased pursuant to this bid:

ATTN (Contact Person's Name): Dianna Chesney
Contact Person's Title: Order Administrator, Bus
Company Name: Sun State International Trucks, LLC
Street Address: 60220 Adamo Dr
City, State, Zip: Tampa FL 33619
Telephone: 813-361-9629
CUSTOMER CONTACT PREFERENCE INFORMATION
Please indicate the proper contact person for all inquiries related to bus orders:
Contact Person's Name: Mike McCullough
Contact Person's Title: Executive Operations Manager
Company Name: Sun State International Trucks, LLC
Street Address: 6020 Adamo Dr
City, State, Zip: Tampa FL 33619
Telephone: 813-226-7330
Fax:
Email address: mike.mccullough@sunstateintl.com

### ATTACHMENT 9 - FILE STRUCTURE FOR REQUIRED STATUS REPORT

COLUMN	FORMAT TYPE	FIELD NAME
Α	NUMBER	DISTRICT NUMBER
В	TEXT	DISTRICT NAME
C	TEXT	BUS OWNED BY? (DISTRICT INPUT)
D	TEXT	NAME OF OWNER: CHARTER/CONTRACTOR (DISTRICT INPUT)
E	NUMBER	BUS NUMBER
F	TEXT	BUS TYPE
G	NUMBER	BUS YEAR MODEL
H	TEXT	BUS SERVICE SCHEDULE (DISTRICT INPUT)
1	NUMBER	SHELL DESIGN CAPACITY
J	NUMBER	EQUIPPED SEATING CAPACITY
K	NUMBER	WHEEL CHAIR CAPACITY
L	TEXT	SHOP LOCATION (DISTRICT INPUT)
М	TEXT	CHASSIS MFG
N	TEXT	CHASSIS MODEL
0	TEXT	VIN#
Р	TEXT	FUEL TYPE: DIESEL, PROPANE, CNG, GASOLINE, ELECTRIC, HYBRID
Q	TEXT	ENGINE MODEL
R	TEXT	ENGINE SERIAL NUMBER
S	TEXT	TRANS MODEL NUMBER
T	TEXT	TRANS SERIAL NUMBER
U	TEXT	BODY MFG
V	TEXT	BODY MODEL
w	TEXT	BODY SERIAL NUMBER
X	TEXT	SEAT BELT TYPE
Υ	TEXT	A/C EQUIPPED
Z	TEXT	A/C MFG
AA	TEXT	A/C MODEL NUMBER
AB	TEXT	LIFT EQUIPPED?
AC	TEXT	LIFT MFG
AD	TEXT	LIFT MODEL NUMBER
AE	TEXT	LIFT SERIAL NUMBER
AF	TEXT	BID CONTRACT NUMBER
AG	DATE	BUS ORDER DATE
AH	TEXT	TO BE (D) DELIVERED OR (PU) PICKED-UP
Al	DATE	BUS BUILD DATE
AJ	DATE	EST DEL DATE
AK	TEXT	DEL STATUS
AL	DATE	DATE OF DELIVERY
AM	DATE	IN-SERVICE DATE
AN	NUMBER	ODOMETER MILES AT DATE OF DELIVERY
AO	TEXT	EXTENDED WARRANTY
AP	NUMBER	TOTAL COST WITH OPTIONS AND DELIVERY

NOTE: File shall be a Microsoft Excel spreadsheet.

See Sample report included
41
10/18/22

District Number	District Name	Bus Owned By	Name of Owner	Cust Bus #	BUS TYPE	Bus Year Model	Bus Service Schedule   Shell De	Shell Design Capacity
9	6 Broward District School Board			622001	U	2023		71
9	6 Broward District School Board			622002	U	2023		71
9	6 Broward District School Board			622003	O	2023		T1
9	6 Broward District School Board			622004		2023		71
9	6 Broward District School Board			622005	U	2023		71
9	6 Broward District School Board			622006	U	2023		71
9	6 Broward District School Board			622007	U	2023		71
9	6 Broward District School Board			622008	U	2023		71
9	6 Broward District School Board			622009	U	2023		71
9	6 Broward District School Board			622010	U	2023		71
9	6 Broward District School Board			622011	U	2023		71
9	6 Broward District School Board			622012	U	2023		71
9	6 Broward District School Board			622013	U	2023		71
9	6 Broward District School Board			622014	U	2023		71
φ	6 Broward District School Board			622015	U	2023		7.1
9	6 Broward District School Board		v	622016	u	2023		1.7
9	6. Broward District School Board			622017	U	2023		71
9	6 Broward District School Board			622018	v	2023		71
9	6 Broward District School Board		y	622019	O	2023		T1
9	6 Broward District School Board		v	622020	v	2023		71

Equipped Seating Capacity	Wheel Chair Capacity	Shop Location	Chassis Mfg	Chassis Mfg Chassis Model	*NIA	Fuel Type	Engine Model   Engine Serial   Trans Model	gine Serial T	rans Model
48	m		<u>S</u>	IJ	4DRBUC8N0PB068162	Diesel	Cummins ISB	2:	2500 PTS
48	See the partition of the section of		<u>D</u>	CE	4DRBUC8N2PB068163	Diesel	Cummins ISB	5.	2500 PTS
48	<b>C</b>		<u>S</u>	CE	4DRBUC8N4PB068164	Diesel	Cummins ISB	Total Control of the	2500 PTS
48	m		ಲ	CE	4DRBUC8N6PB068165	Diesel	Cummins ISB	2 P	2500 PTS
48	ĸ		ō	CE	4DRBUC8N8PB068166	Diesel	Cummins ISB	25	2500 PTS
48	8		O.	Œ	4DRBUC8NXPB068167	Diesel	Cummins ISB	52	2500 PTS
48	æ		ñ	CE	4DRBUC8N1PB068168	Diesel	Cummins ISB	25	2500 PTS
48	ĸ		ပ္	CE	4DRBUC8N3PB068169	Diesel	Cummins ISB	25	2500 PTS
48	m		)	CE	4DRBUC8NXPB068170	Diesel	Cummins ISB	25	2500 PTS
48	8		)	CE	4DRBUC8N1PB068171	Diesel	Cummins ISB	25	2500 PTS
48	ĸ		<u>)</u>	G	4DRBUC8N3PB068172	Diesel	Cummins ISB	25	2500 PTS
48	m		)	GE	4DRBUC8N5PB068173	Diesel	Cummins ISB	25	2500 PTS
48	m		<u>D</u>	3	4DRBUC8N7PB068174	Diesel	Cummins ISB	25	2500 PTS
48	m		<u>U</u>	ij	4DRBUC8N9PB068175	Diesel	Cummins ISB	25	2500 PTS
48	čn ,		<u>.</u>	ij	4DRBUC8N0PB068176	Diesel	Cummins ISB	25	2500 PTS
48	m		)	3	4DRBUC8N2PB068177	Diesel	Cummins ISB	25	2500 PTS
48	m		<u>S</u>	ij	4DRBUC8N4PB068178	Diesel	Cummins ISB	25	2500 PTS
48	E		ပ	3	4DRBUC8N6PB068179	Diesel	Cummins ISB	25	2500 PTS
48	C		<u>S</u>	IJ	4DRBUC8N2PB068180	Diesel	Cummins ISB	25	2500 PTS
48	С			Œ	4DRBUC8N4PB068181	Diesel	Cummins ISB	25	2500 PTS

Trans Serial	Body M	fg Body Mode	I BOD SERIAI	Trans Serial Body Mfg   Body Model   BOD SERIAL   Seat Belt Type   AC   A/C Manuf	AC	A/C Manuf	A/C Model	Lift	Lift Lift Manuf	Lift Model	Lift Serial	Bid #	<b>Bus Order Date</b>
	<u>D</u>	GE	068162	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>		NCL1000FIB3451		2022-01	02-May-22
	<u>o</u>	9	068163	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>-	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>D</u>	<u> </u>	068164	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>D</u>	ij	068165	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>D</u>	ij	068166	Lap	>-	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ij	068167	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ij	068168	Lap	>-	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ä	068169	Lap	>-	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>-	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>∪</u>	ä	068170	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ä	068171	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>-	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ä	068172	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	U	068173	Lap	>-	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	ä	068174	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	8	068175	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>o</u>	3	068176	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun 1	NCL1000FIB3451		2022-01	02-May-22
	ō	E CE	068177	Lap	>-	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	ō	S	068178	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>-	Braun	NCL1000FIB3451	į	2022-01	02-May-22
	<u> </u>	3	068179	Lap	>	ICAir	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>ں</u>	SE	068180	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451		2022-01	02-May-22
	<u>ں</u>	u	068181	Lap	>	IC Air	SAD-FRIW-SC-43-10, 150,000, 138 Amps	>	Braun	NCL1000FIB3451	\$	2022-01	02-May-22

17-Apr-23 In-Process	<b>↓</b> 0	123806
17-Apr-23 In-Process	٨٥	123806
17-Apr-23 in-Process	λ 0	123806
17-Apr-23 In-Process	۸ 0	123806
17-Apr-23 In-Process	Å 0	123806
17-Apr-23 In-Process	٨ 0	123806
17-Apr-23 In-Process	λ0	123806
17-Apr-23 In-Process	٨.0	123806
17-Apr-23 In-Process	÷ 0	123806
17-Apr-23 In-Process	٨.0	123806
17-Apr-23 In-Process	<b>&gt;</b> 0	123806
17-Apr-23 In-Process	٨0	123806
17-Apr-23 in-Process	٨0	123806
17-Apr-23 In-Process	٨0	123806
17-Apr-23 in-Process	λ0	123806
17-Apr-23 In-Process	<b>\</b> 0	123806
17-Apr-23 In-Process	٨0	123806
17-Apr-23 In-Process	λ0	123806
17-Apr-23 In-Process	λ0	123806
17-Apr-23 In-Process	λ'0	123806

### Attachment 10 Pre-delivery Inspection Form (2023-02) BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT

District:		Local Bus #:	Date F	Date Rec'd.:	Shop Location:	on:	
Bus Type	9: [A] [B] [C] [D-Fn	Bus Type: [A] [B] [C] [D-Front Engine] [D-Rear Er	ngine ] Shell Seating Capacity:	g Capacity:		Equipped Seating Capacity:	
Wheelch	Wheelchair Capacity:	Chassis Mfr.:		Chassis Model:		Chassis Build Date:	
Chassis VIN:	VIN:			Eng. Model:		Eng. S/N:	
Trans. Model:	odel:	Trans. S/	ż		Fue	Fuel Type:	
Body Mfr.:			Body Model:		Boo	Body S/N:	
In-service-date:	e-date:	Lift: Yes / No	Lift Mfr.:	Lift Model:		Lift S/N:	
In-service	In-service-mileage:	A/C: Yes / No	A/C Mfr.:	Evap. S/N:		Comp. S/N:	İ
STATU	STATUS CODES: √ = OK	X = Malf	X = Malfunction (but Meets Specs)		O = Does Not Meet Specs		
Status Code		INSPE	INSPECTION ITEMS			COMMENTS (Note Specific Deficiencies)	Tech.
A. INSIDE BUS	EBUS		The second section of the second section of the second section of the second section of the second section sec				
	1. Emergency Equipment - Fire	1. Emergency Equipment - Fire Ext. (pressure/lag/mount), First Aid Kit, Body Fluid Cleanup Kit and Reflectors	Kit, Body Fluid Cleanup Kit a	and Reflectors			
	2. Registration and Insurance Card	ard					
	3. Neutral Safety Switch, Shifter	Neutral Safety Switch, Shifter and Noise Abatement Switch					
-	4. Engine Controls - Key Switch,	Engine Controls - Key Switch, Accelerator and Engine Shutdown					
-	5. Gauges, Indicators, Dash and	Gauges, Indicators, Dash and Switch Panel Lights, Engine Warning Lights/ Buzzers and ABS Warning Light	rning Lights/ Buzzers and	ABS Warning Light			
_	6. Air Brake System - Gauge(s), I	Air Brake System - Gauge(s), Build-Up, Governor, Park Brake, Adjustment, Air Leaks, Low Air Warning, PP-1 Pop-Off and Pedal	djustment, Air Leaks, Low Air	Warning, PP-1 Pop-Off and Ped			
	7. Hydraulic Brakes - Warning Lie	Hydraulic Brakes - Warning Light, Gauge, Pedal Travel and Fade, Power Assist and Park Brake	, Power Assist and Park Bral	ke			
	8. Windshield Wipers and Wash	Windshield Wipers and Washers - Operation, Park and Blades					
	9. Heaters, Defrosters, Auxiliary Dash or Header Fan(s)	/ Dash or Header Fan(s)					
-	10. Dome and Step Well Lights						
_	11. Service Door - Operation, Control and Overhead Pad	trol and Overhead Pad					
-	12. Horns						
-	3. Mirror Adjustment and Condit	13. Mirror Adjustment and Condition - Rear vision, Cross-view, Side-view and	-view and Interior				
-	14. Driver's Seat and Seat Belt						
-	5. Passenger Seats - Frames, Mc	15. Passenger Seats - Frames, Mounting, Pads, Cuts, Bottoms, Modesty Panels, Stanchions, Passenger Securement Devices and Webbing Cutter	esty Panels, Stanchions, Pas	senger Securement Devices and	Webbing Cutter		
-	6. Emergency Doors, Windows,	16. Emergency Doors, Windows, Hatches and Passenger Check System Operation, Buzzers, Labeling and Overhead Pad	ystem Operation, Buzzers,	Labeling and Overhead Pad			
-	7. Windshield, Side and Rear Wi	17. Windshield, Side and Rear Windows - Cracks, Fogging, Latches and Visor	and Visor				
-	18. Wheelchair Lift, Door and Securement System - (if equipped)	curement System - (if equipped)					
-	19. Two-Way Radio Operation - (if equipped)	f equipped)	:				
2	20. Interior Wiring, Cab Hoses and Fire Wall Seals	d Fire Wall Seals					

MAMen 10/18/22

		ı
2	21. General Condition of Bus Interior - Floor, Step well, Grab Rail(s), Paneling, Broom Mounting, Loose Objects Secured and Engine Cover	
9.00	B. OUTSIDE BUS	MEL
	1. Headlights, Turn Signals, Hazard, Brake, Tail, Backup Lights, Backup Alarm and Park Lights	Г
	2. Clearance, Side Marker, ID Lights, Reflectors and Strobe Light	Т
	3. Pupil Warning Lights	T
	4. Stop Arm(s) and Student Crossing Arm - Wiring, Air or Vacuum Leak and Decal	1
	5. General Condition of Bus Exterior - Mirrors, Bumpers, Body Damage, Paint, Reflective Marking, Lettering, Emergency Door, Engine Hood and Cleanliness	T
C. ENG	C. ENGINE COMPARTMENT	×
	1. Steering - Play, Column, Steering Gear Box Mounting, Pitman Arm, Drag Link, Steering Arm, Tie Rod & Ends and Idler Arm	
	2. Batteries - Hold Down, Terminals, Cables, Cleanliness, Slide Tray and Load Test. Check battery voltage after 15 seconds load at % CCA.	Т
	Bat1 Bat2 Bat 3	
	3. Fluid Levels and Condition - Brake, Power Steering, Oil, Transmission, Windshield Washer, Coolant (Antifreeze °F) and DEF	T
	4. Belts and All Hoses - Tightness, Condition, Routing and Belt Alignment	Т
	5. Accessory Mounting and Condition – Power Steering Pump, Air Compressor and Filter, Water Pump, Fan, Alternator and Air Cleaner (H <sub>2</sub> O)	T
	6. Wiring - Routing and Condition	Т
	7. Fuel System and Lines	$\top$
	8. Radiator - Mounting, Cap, Reservoir and Fan Shroud	Т
	COMMENTS / NOTES	
		_
		1
		Γ
		Г
		_
		7

men 10/18/22

D. UNDERNEATH BUS  1. Front Suspension - Leeam, U-Bolts, Springs, Spring Mounts, Shackles, Pins and Bushings, Shocks, Kingpins, Wheel Bearings, Seals, A-Frames, Bushings and Ball Joints 2. Front Barkes - Horses, Lines, Chambers, Slack Adjusters, Push rods, Linings, Drums, Rotors and Wheel Cylinders or Calipers. Check and Adjust MSA-Equipped Brakes. Do Not Adjust ASA-Equipped Brakes. Disc Brakes 3. Engine Mounts, Transmission Mounts and Starter Mounting 4. Transmission - Bolts, Linkage, Lines, Filter and Cooler 5. Fluid Leaks - Oil, Coolant, Transmission, Power Steering and DEF 6. Fuel and DEF Tank - Leaks, Mounting, Hoses and Wiring 7. Brake Equipment - ABS, Lines, Valves, Reservoir Mounting and Bleed Reservoirs	INSPECTION ITEMS  Its. Springs, Spring Mounts, Shackles, F. Seals, A-Frames, Bushings and Ball Umbers, Slack Adjusters, Push rods, Linii Check and Adjust MSA-Equipped Brake			COMMENTS (Note Specific Deficiencies)	Tech. Initiats
D. UNDERNEATH BUS  1. Front Suspension - I-Beam, U-Bolts, S. Shocks, Kingpins, Wheel Bearings, Se. 2. Front Brakes - Hoses, Lines, Chamber and Wheel Cylinders or Calipers. Chec Equipped Brakes. Disc Brakes 3. Engine Mounts, Transmission Mount 4. Transmission - Bolts, Linkage, Lines, F. Fluid Leaks - Oil, Coolant, Transmission 5. Fluid Leaks - Oil, Coolant, Transmission 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valvee	Springs, Spring Mounts, Shackles, Feals, A-Frames, Bushings and Ball Jars, Slack Adjusters, Push rods, Liniinck and Adjust MSA-Equipped Brake			Constitution of the second of	
1. Front Suspension - I-Beam, U-Bolts, Se Shocks, Kingpins, Wheel Bearings, Se 2. Front Brakes - Hoses, Lines, Chamber and Wheel Cylinders or Calipers. Chec Equipped Brakes. Disc Brakes 3. Engine Mounts, Transmission Mount 4. Transmission - Bolts, Linkage, Lines, F 5. Fluid Leaks - Oil, Coolant, Transmission 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valvee	Springs, Spring Mounts, Shackles, Feals, A-Frames, Bushings and Ball Jers, Slack Adjusters, Push rods, Liniick and Adjust MSA-Equipped Brake				
2. Front Brakes - Hoses, Lines, Chamber and Wheel Cylinders or Calipers. Chec Equipped Brakes. Disc Brakes 3. Engine Mounts, Transmission Mount 4. Transmission - Bolts, Linkage, Lines, F 5. Fluid Leaks - Oil, Coolant, Transmissio 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valver	ers, Slack Adjusters, Push rods, Linii ick and Adjust MSA-Equipped Brake	Pins and Bushings,			
3. Engine Mounts, Transmission Mount 4. Transmission - Bolts, Linkage, Lines, F 5. Fluid Leaks - Oil, Coolant, Transmissio 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valve		ngs, Drums, Rotors s. Do Not Adjust ASA-			j
4. Transmission - Bolts, Linkage, Lines, F 5. Fluid Leaks - Oil, Coolant, Transmissio 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valver	its and Starter Mounting				
5. Fluid Leaks - Oil, Coolant, Transmissio 6. Fuel and DEF Tank - Leaks, Mounting, 7. Brake Equipment – ABS, Lines, Valve	Filter and Cooler				
6. Fuel and DEF Tank - Leaks, Mounting. 7. Brake Equipment – ABS, Lines, Valver	ion, Power Steering and DEF				
7. Brake Equipment - ABS, Lines, Valve:	g, Hoses and Wiring				
	es, Reservoir Mounting and Bleed	Reservoirs			
8. Driveline - Shafts, U-Joints, Yokes, Hanger Bearings, Guards Driveshaft and	anger Bearings, Guards Driveshaft a	ind Park brake			
9. Rear Suspension - Axle Housing, Vent, Differential, Springs, U-Bolts, Pins and Bushings, Hangers, Seals and Wheel Bearings	nt, Differential, Springs, U-Bolts, Shond Wheel Bearings	Shocks, Spring Shackles,			
10. Rear Brakes - Hoses, Lines, Chambers, Slack Adjusters, Push rods, Linings, Drums, Rotors and Wheel Cylinders or Calipers. Check and Adjust MSA-Equipped Brakes. Disc Brakes.	rs, Slack Adjusters, Push rods, Linir ck and Adjust MSA-Equipped Brake	igs, Drums, Rotors s. Do Not Adjust ASA-			
11.Body Securement and Structure - Hold Downs, Floor, Outriggers, Br Skirts, Mud Flaps and Chassis Frame Rails	old Downs, Floor, Outriggers, Braces, Rails	'n			
12. Exhaust System - Leaks, Mounting, Muffler, Tailpipe and DEF, DPF System	fuffler, Tailpipe and DEF, DPF Syste	E.			
13.Wheels and Tires - Tread Depth, Pressure, Damage, Matching, Alignment and Wheel Hardware	ssure, Damage, Matching, Alignmenl				
TIRES	RF	RRO	RRI	LRO	LRI
Tread Depth /3	/32	/32	/32	/32	/32
Air Pressure PS	PSI	PSI	PSI	PSI	PSI
Lug Nut Torque Ft lbs.	s. Ft lbs.	Ft lbs.		Ft lbs.	
Tire Serial Number	į				
=		Lug Nut To	Lug Nut Torque Verified		
	0				0
]					

min Them 10/18/22

	2. Check Fuel Filter(s) Primary/Secondary and Separator
- 1	3. Check Transmission Filter(s)
1	4. Check Air Compressor Filter (if applicable)
-/	5. Check Power Steering Filter
	6. Check Engine Air Cleaner assembly and Filter
,-	7. Check Coolant Filter and record DCA level
~	8. Test Starting and Charging System. Amps Volts
,	10. Air Conditioning Filters
F. ROAD TEST	EST
Ě	1. Brake Performance - Park Brake, Stopping Distance and Equalization
,,	2. Engine, Transmission and Driveline - Engine Performance, Governor and Shifting
(7)	3. Steering and Handling -Free Play, Power Assist, Column, Tracking and Turning Radius
EM S	G. ITEM SPECIFICATIONS
F	1. Body Data Plate
-	2. Body Structure
6,	A/C Equipment
4	4. Wheel Chair Lift Equipment
°	5. Wheel Chair Tie-Down and Securement System
9	6. Driver's Document Compartment
_	7. Publications
80	8. Engine Equipment
6	9. Engine Performance
-	10. Ventilation
-	11. Square and Level - (RF) (LF) (RR)
PTION	
-	1. Type A Chassis Options
2	2. Type B, C and D Chassis Options
(r)	3. Type A, B, C and D Body Exceptions and Options

min men 10/18/22

Certification Number:

Chassis Inspector's Signature:



IC BUS, LLC 2322 North Mingo Road Tulsa, OK 74116

September 1, 2022

Florida Department of Education School Transportation Management Section 325 West Grimes Street Tallahassee, FL 32399-0400

IC Bus hereby certifies that all units manufactured for sale in the State of Florida meet or exceed all applicable requirements of U.S. Federal Motor Vehicle Safety Standards. Any optional equipment necessary to meet the requirements of the State of Florida School Bus Bid Specifications, effective January 2023 and the National School Transportation Specifications and Procedures, revised 2015 editions is the responsibility of the IC Bus dealer in the state and that dealer is Sun State Bus Center 6020 Adamo Dr. Tampa, FL 33619.

Sincerely,

Chad Duncan



IC BUS, LLC 2322 North Mingo Road Tulsa, OK 74116

September 1, 2022

Florida Department of Education School Transportation Management Section 325 West Grimes Street Tallahassee, FL 32399-0400

All chassis for integrated units furnished by IC Bus can be provided with adequate front and rear gross axle weight rating (GAWR). The responsibility for ordering axle and suspension components to comply with Florida School Bus Bid Specifications, effective January 2023 is the responsibility of the IC Bus dealer in the state and that dealer is Sun State Bus Center 6020 Adamo Dr. Tampa, FL 33619.

Sincerely,

Chad Duncan



IC BUS, LLC 2322 North Mingo Road Tulsa, OK 74116

September 1, 2022

Florida Department of Education School Transportation Management Section 325 West Grimes Street Tallahassee, FL 32399-0400

IC Bus hereby certifies that all installations of wheelchair lifts will comply to all requirements of U.S. Federal Motor Vehicle Safety Standards, the State of Florida School Bus Bid Specifications, effective January 2023, and the National School Transportation Specifications and Procedures, revised 2015 edition.

Sincerely,

Chad Duncan



State of Florida Department of Education Tallahassee, FL

Re: Estimated Chassis Delivery

This is to confirm that IC Bus and Sun State International Trucks, LLC have the facilities and resources to produce and deliver completed buses within the required production days as outlined in this ITB. Chassis production for IC products is performed in the same facility as the body. Chassis build date and build date for the complete bus are the same.

Respectfully,

Mike McCullough

**Executive Operations Manager** 



State of Florida
Department of Education
Tallahassee, FL

Re: Liquidated Damages

This is to acknowledge I have read and understand the provisions of Section 6.2 of the Florida Department of Education's ITB 2023-02, Liquidated Damages.

Respectfully,

Mike McCullough

**Executive Operations Manager** 



State of Florida
Department of Education
Tallahassee, FL

Re: Liquidated Damages

This is to acknowledge I have read and understand the provisions of Section 6.2 of the Florida Department of Education's ITB 2023-02, Liquidated Damages.

Respectfully,

Mike McCullough

**Executive Operations Manager** 



IC BUS, LLC 2322 North Mongo Road Tulsa, OK 74116

September 1, 2022

Florida Department of Education School Transportation Management Section 325 West Grimes Street Tallahassee, FL 32399-0400

IC Bus hereby certifies that prevail upholstery manufactured by Omnova meets or exceeds all requirements of State of Florida School Bus Bid Specifications, effective January 2023, National School Transportation Specifications and Procedures, revised 2015 edition, and all FMVSS requirements.

Sincerely,

Chad Duncan



State of Florida
Department of Education
Tallahassee, FL

Re: Certification of Chassis Performance, ITB 2023-02

Buses to be furnished by Sun State International via bid 2023-02 to the State of Florida, Department of Education will meet the chassis performance requirements per Florida School Bus Specifications, Effective January 2023

Respectfully,

Mike McCullough

**Executive Operations Manager** 



State of Florida Department of Education Tallahassee, FL

Re: Pre-delivery Inspection Process Outline

Buses offered by Sun State International via the Florida Department of Education's ITB 2023-02 will be predelivery inspected at a Sun State International facility and/or facility of an IC Bus Support Dealer in Florida.

Inspections will be performed and documented on the form provided as Attachment 10 of the ITB and per the requirements of the Florida School Bus Inspection Manual.

Sun State International and Florida IC support dealers are committed to participating in the FAPT/Department of Education's Inspector training and certification program.

Respectfully,

Mike McCullough

**Executive Operations Manager** 

### ATTACHMENT 20 – STATE OF FLORIDA, DEPARTMENT OF EDUCATION ATTACHMENT C STANDARD TERMS AND CONDITIONS

Pursuant to S. 287.058(1), Florida Statutes ("F.S."):

- A. Bills for fees or other compensation for services or expenses shall be submitted in detail sufficient for a proper preaudit and postaudit thereof.
- B. Travel expenses will be reimbursed only if expressly authorized by the terms of the Contract. Bills for any travel expenses shall be submitted in accordance with s. 112.061, F.S.
- C. The Department may unilaterally cancel this Contract if the Contractor refuses to allow access by members of the public to all documents, papers, letters and materials made or received in conjunction with the Contract that are subject to Chapter 119, F.S., and are not exempt from public inspection by s 119.071, F.S., or by other provisions of general or special law.
- D. The Deliverables specified in the Contract must be received and accepted in writing by the Department's Contract Manager before Contractor is entitled to payment.
- E. To complete this Contract, all services must be performed and/or goods received on or before the date(s) specified in the Contract.
- F. If this Contract is expressly renewable, it may be renewed for a period that may not exceed three years or the term of the original contract, whichever is longer. The renewal price for the contracted service is set forth in the bid, proposal, reply. Cost for renewal shall not be changed. Renewals shall be contingent on satisfactory performance evaluations by the Department and subject to the availability of funds. Exceptional purchase contracts pursuant to s. 287.057(3)(a) and (c), F.S., may not be renewed.
- II. In fulfilling its obligations under this Contract and Chapter 119, F.S., Contractor must comply with the requirements outlined in s. 119.0701, F.S. If Contractor fails to comply with a public records request pursuant to Chapter 119, F.S., the Department may take any action under this Contract necessary to ensure compliance with Florida's public records laws, including, but not limited to, demanding compliance with a public records request, seeking indemnification from Contractor regarding an action brought to enforce a public records request sent to Contractor, or terminating the Contract. Pursuant to s. 119.0701, F.S., Contractor must:
  - Keep and maintain public records required by the Department to perform the service;
  - B. Upon request from the Department's custodian of public records, provide the Department with a copy of the requested records or allow the records to be inspected or copied within a reasonable time at a cost that does not exceed the cost provided in chapter 119, F.S., or as otherwise provided by law;
  - C. Ensure that public records that are exempt or confidential and exempt from public records disclosure requirements are not disclosed except as authorized by law for the duration of the Contract term and following completion of the Contract if the Contractor does not transfer the records to the Department; and
  - D. Upon completion of the Contract, transfer, at no cost, to the Department all public records in possession of the Contractor or keep and maintain public records required by the Department to perform the service. If the Contractor transfers all public records to the Department upon completion of the Contract, the Contractor shall destroy any duplicate public records that are exempt or confidential and exempt from public records disclosure requirements. If the Contractor keeps and maintains public records upon completion of the Contract, the Contractor shall meet all applicable requirements for retaining public records. All records stored electronically must be provided to the Department, upon request from the Department's custodian of public records, in a format that is compatible with the information technology systems of the Department.

IF THE CONTRACTOR HAS QUESTIONS REGARDING THE APPLICATION OF CHAPTER 119, FLORIDA STATUTES, TO THE CONTRACTOR'S DUTY TO PROVIDE PUBLIC RECORDS RELATING TO THIS CONTRACT, CONTACT THE CUSTODIAN OF PUBLIC RECORDS AT 850-245-0735 & contractcustodian@fldoe.org, Florida Department of Education, Attn: Contract Custodian 325 W. Gaines Street, Suite 344, Tallahassee, FL 32399-0400.

III. The Contractor shall prepare an invoice for the amount due and mail it to the Department of Education Comptroller after having delivered the products and services required under this Contract to the Contract Manager. The invoice shall set forth details sufficient for a proper pre-audit and post-audit including, where applicable, the products and services delivered and completion dates. Upon receipt of the invoice, the Department of Education Comptroller will request confirmation from the Contract Manager that the delivered products and services are satisfactory and payment is due. If for any reason they are not satisfactory, payment will be withheld until the unsatisfactory condition or conditions are corrected. Upon receipt of the Contract Manager's approval, the Department of Education Comptroller shall process each invoice in accordance with the provisions of s. 215.422, F.S.

-mhme 10/18/22

- A. Contractor agrees to submit invoice within thirty (30) days of the Department's acceptance of deliverables. It is understood that should Contractor fail to submit invoice within thirty (30) days following the Department's acceptance of the deliverables, the Department shall not be responsible for payment thereof under this contract or quantum meruit.
- IV. Section 215.422, F.S., provides that agencies have five (5) working days to inspect and approve goods and services, unless bid specifications or the Contract specifies otherwise. With the exception of payments to health care providers for hospital, medical, or other health care services, if payment is not available within forty (40) days, measured from the latter of the date the invoice is received or the goods or services are received, inspected and approved, a separate interest penalty set by the Comptroller pursuant to s. 55.03, F.S., will be due and payable in addition to the invoice amount. To obtain the applicable interest rate, please contact the Department's Fiscal s. at 850/245-0401 or Purchasing Office at 850/245-0483. Payments to health care providers for hospitals, medical, or other health care services, shall be made not more than thirty-five (35) days from the date of eligibility for payment is determined, and the daily interest rate is .02740 percent. Invoices returned to a vendor due to preparation errors will result in a payment delay. Invoice payment requirements do not start until a properly completed invoice is provided to the agency. A Vendor Ombudsman, whose duties include acting as an advocate for vendors who may be experiencing problems in obtaining timely payment(s) from a State Agency, may be contacted at 866/352-3776 or by calling the Chief Financial Officer's Hotline, 800/342-2762.
- V. As used in this Contract, the term "Deliverable" refers to tangible "commodities", as defined in s. 287.012(5), F.S., which the Contractor provides pursuant to the Contract and to reports or other tangible or documentary evidence which demonstrate that the Contractor has performed the services required by the Contract. The following provisions govern Deliverables, as applicable:
  - A. Each Deliverable must be physically delivered to the Department's Contract Manager, or to a person designated by the Contact Manager. If delivery is made to a designee, the Contractor shall give written notice to the Contract Manager of the delivery. A Deliverable is not received until the Contract Manager has physical control of deliveries or has written notice that the designee has physical control.
  - B. In each case in which the approval of a Deliverable is dependent upon tests being conducted by the Department or Contractor, independently or jointly, the Department's inspection and approval of the Deliverable shall not be subject to the five (5) day provision in s. 215.422, F.S., but shall be governed by the terms and conditions of the acceptance testing plan as stated in Attachment A, until approved in accordance with the plan.
  - C. In each case of a Deliverable of information technology, as defined at s. 287.012(14), F.S., unless specified otherwise in Attachment A, the acceptance testing plan is deemed to include as a minimum the reliable performance of the information technology in accordance with its design specifications in:
    - 1. a test environment that simulates the production environment as much as is reasonably possible; and
    - the production environment for which it is intended for a period of time sufficient for the information technology to have experienced the major foreseeable exigencies of the production functions.
  - D. The Department's inspection, including testing when applicable, shall determine whether or not the Deliverables appear to be in compliance with the Contract. The Contractor shall be notified in writing of any apparent deficiency. The written notice shall detail the specific action required by the Contractor to correct the deficiency. The Contractor shall timely correct such deficiency and resubmit the deliverable for acceptance.
- VI. The Contractor represents and agrees that information submitted in support of its requests for payment is the basis of payment and is true and accurate to the best of knowledge of the responsible signatory. A violation of this provision shall subject the violator to the provisions of s. 68.082, F.S., pertaining to false claims against the State, and/or s. 837.06, F.S., pertaining to false official statements.
- VII. This paragraph applies if this Contract expires in a fiscal year subsequent to the fiscal year in which the Contract is entered. The State of Florida's fiscal year comprises July 1 through June 30. The Department's and State of Florida's performance and obligation to pay under this Contract is contingent upon an annual appropriation by the Legislature.
- VIII. Notwithstanding anything to the contrary contained in a State Term Contract, Contractor warrants that all commodities, as defined in s. 287.012, F.S., shall meet the specifications of the Contract and shall be merchantable and fit for the particular purposes intended by the Contract.
- IX. The Contractor further warrants that as to each Deliverable produced pursuant to this Contract, Contractor's production of the Deliverable, and the Department's use of the Deliverable, will not infringe on the copyrights of any third party. This provision applies to each work of authorship in which copyrights subsist pursuant to 17 U.S.C. Sections 102-105 and to each exclusive right established in 17 U.S.C. Section 106. In furtherance of this provision the Contractor additionally warrants that:
  - A. As to each work of software or other "information technology", as defined in s. 287.012(15), F.S., in which copyrights subsist, the Contractor has acquired the rights by conveyance or license to any third party software or other information technology, which was used to produce the Deliverable;
  - B. As to each image and sound recording incorporated into a Deliverable, the Contractor has acquired the necessary rights, releases, and waivers from the person whose image or sound is included, or from the holder of the copyrights subsisting in the literary, musical, dramatic, pantomime, choreographic, pictorial, graphic, sculptural, motion pictures, audiovisual work or sound recording from which the included image or sound recording was taken.
- X. The Contractor further warrants that the Contractor shall not disclose to any third party, without the express, prior, written approval of the Department, any personally identifiable information about any student. This applies to information which came from any record or report of a Florida public education institution or from any education record which is subject to the Family Educational Rights and Privacy Act, 20 U.S.C. Section 1232g. The terms "record a report" and "student" shall have the meanings prescribed in s. 1002.22(2)(c) and (d), F.S. The term "educational record" shall have the meaning prescribed in 20 U.S.C. Section 1232g(a)(4).

my

- XI. In the event that the Governor and Cabinet are required to impose a mandatory reserve on appropriations, the Department shall amend this Contract to place in reserve the amount determined by the Department of Education to be necessary because of the mandatory reserve. Such amendments may provide for adjustments in the Deliverable products and services as may be necessary.
   XII. Intellectual property is subject to following additional provisions:
  - A. Anything by whatsoever designation it may be known, that is produced by, or developed in connection with, this Contract shall become the exclusive property of the of the State of Florida and may be copyrighted, patented, or otherwise restricted as provided by Florida or federal law. Neither the Contractor nor any individual employed under this Contract shall have any proprietary interest in the product.
  - B. With respect to each Deliverable that constitutes a work of authorship within the subject matter and scope of U.S. Copyright Law, 17 U.S.C. Sections 102-105, such work shall be a "work for hire" as defined in 17 U.S.C. Section 101 and all copyrights subsisting in such work for hire shall be owned exclusively by the Department pursuant to s. 1006.39, F.S., on behalf the State of Florida.
  - C. In the event it is determined as a matter of law that any such work is not a "work for hire", Contractor shall immediately assign to the Department all copyrights subsisting therein for the consideration set forth in the Contract and with no additional compensation.
  - D. The foregoing shall not apply to any preexisting software, or other work of authorship used by Contractor, to create a Deliverable but which exists as a work independently of the Deliverable, unless the preexisting software or work was developed by Contractor pursuant to a previous Contract with the Department or a purchase by the Department under a State Term Contract.
  - E. The Department shall have full and complete ownership of all software developed pursuant to the Contract including without limitation:
    - 1. The written source code;
    - 2. The source code files:
    - 3. The executable code:
    - 4. The executable code files:
    - 5. The data dictionary;
    - 6. The data flow diagram;
    - 7. The work flow diagram;
    - 8. The entity relationship diagram; and
    - All other documentation needed to enable the Department to support, recreate, revise, repair, or otherwise make use of the software.
- XIII. The Department reserves the right, at its option, to issue a change order to delete work tasks reducing the total Contract amount by up to 10%. An addition of work tasks within the scope of the Contract, an increase in the total Contract amount, or a decrease of more than 10% of the total Contract amount, shall be implemented only by a Contract amendment signed by both the Department and the Contractor.
- XIV. Pursuant to s. 216.347, F.S., no funds awarded under this Contract may be used for the purpose of lobbying the Legislature, the judicial branch, or a State agency.
- XV. The Contractor understands that s. 20.055, F.S., requires every contractor and subcontractor to cooperate with the Department's Inspector General in any investigation, audit, inspection, review, or hearing; and the Contractor shall comply with this requirement. The Contractor shall grant access to all records pertaining to the Contract to the Department's Inspector General, General Counsel and other agency representatives, the State Auditor General, the Office of Program Policy and Government Accountability, and the Chief Financial Officer.
- XVI. The Contractor agrees to permit onsite visits by designated Department employees or agents to conduct audits to ensure compliance with Section 20.055, Florida Statutes. These audits may require Department access to records and data, computers and communications devices, and other materials whether owned or operated by the Contractor. Access may include, but is not limited to, user level and/or system level access to any computing or communications device; access to information (electronic, hardcopy, etc.) that may be produced, transmitted or stored on the Contractor's equipment or premises; access to work areas; and access to interactively monitor and log traffic on the Contractor's networks.
- XVII. The Contractor must carry general liability insurance, which shall include errors and omissions coverage. The amount of coverage shall be a minimum of \$1,000,000 or the aggregate total of all contractual agreements between the Contractor and the agencies and political subdivisions of the State of Florida, whichever is greater. The Contractor shall add the Department as an additional insured on the general liability coverage. The insurance shall cover all of the Contractor's operations under this Contract and shall be effective throughout the Term of this Contract, as well as any renewals or extensions thereto. It is not the intent of this Contract to limit the types of insurance otherwise required by this Contract or that the Contractor may desire to obtain or be required to obtain by law. The Contractor must submit a Certificate of Insurance indicating coverage for general liability purposes and additional insured coverage, and shall maintain and pay for same throughout the Term of this Contract. A Certificate of Insurance indicating adequate coverage shall be submitted to the Department prior to the time the Contract is entered. Any and all insurance policies shall be through insurers qualified to do business in Florida.
  - XVIII. The Contractor agrees to provide the Department upon execution of this Contract with a performance bond or other security deposited with the Department in the total amount of the Contract or another amount if specified in the procurement specifications or Attachment A, guaranteeing that the Contractor will perform all work according to this Contract, within the time and price specified in the Contract. A performance bond shall be issued from a surety company, qualified to do business in Florida.

mu

- XIX. The Contractor may not assign or subcontract all or any portion of this Contract without the advance written consent of the Department.

  XX. In all cases in which the Contractor, with the advance written consent of the Department, assigns or subcontracts, all or any portion of the Contract:
  - The Contractor shall monitor the subcontractor or assignee and establish controls to avoid or mitigate risks identified by the Department or the Contractor; and
  - B. The Contractor shall allow the Department to monitor subcontractor or assignee activity and compliance, and the Contractor shall require the subcontractor or assignee to promptly submit to the Department, at the Department's request, complete and accurate documentation pertaining to the subcontract or the Contract.
- XXI. The Contractor shall coordinate with and assist the Department's Contract Manager in the performance of the latter's responsibilities, which include without limitation:
  - A. Monitoring the activities of the Contractor:
  - Receiving and reviewing the reports of the Contractor to determine whether the objectives of the Contract are being accomplished;
  - C. Receiving and reviewing the invoices for payment of funds to assure that the requirements of the Contract have been met and that payment is appropriate:
  - D. Evaluating the process used by the Contractor to monitor the activities of any subcontractor or assignee; and
  - E. Accessing, directly, the subcontractors and assignees, as the Contract Manager deems necessary.
- XXII. This Contract may not be modified unless in writing signed by the Department and the Contractor.
- XXIII. The Department and the Contractor waive application of the principle of contract construction that ambiguities are to be construed against a contract's drafter, and agree that this Contract is their joint product.
- XXIV. The Department and the Contractor acknowledge that they have had their respective attorneys review and approve this Contract or that they have had the opportunity to do so.
- XXV. This Contract shall be governed by the laws of the State of Florida, and venue for purposes of any action brought to enforce or construe the Contract shall lie in Leon County, Florida.
- XXVI. Failure of the Department to declare any default immediately upon the occurrence or knowledge thereof, or delay in taking any action in connection therewith, does not waive such default. The Department shall have the right to declare any such default at any time and take such action as might be lawful or authorized under the Contract, at law, or in equity. No Department waiver of any term, provision, condition or covenant of the Contract shall be deemed to imply or constitute a further Department waiver of any other term, provision, condition or covenant of the Contract, and no payment by the Department shall be deemed a waiver of any default under the Contract.
- XXVII. Time is of the essence with regard to each and every obligation of the Contractor contained in the Contract. Each such obligation is deemed material, and a breach of any such obligation (including a breach resulting from the untimely performance thereof) shall constitute a material breach.
- XXVIII. The Contractor shall indemnify and hold harmless the Department, its attorneys, agents and employees, from and against any and all third party claims, suits, debts, damages, and causes of action, whatsoever, whether arising in law or in equity, arising out of or relating to Contractor performance or failure to perform under this Contract. The indemnification shall include reasonable attorney fees and costs incurred by the Department, its attorneys, agents and employees, in the defense of any such claim, suits or causes of action, as aforesaid.
- XXIX. This Contract may be cancelled by written agreement of the Department and the Contractor specifically referencing this Contract. Such agreement shall specify the remaining measures necessary to be taken by each party.
- XXX. The Department reserves the right to cancel this contract without cause by giving the Contractor thirty (30) days written notice.
- XXXI. Should Contractor fail to perform to Contract terms and conditions, Contractor shall be notified in writing, stating the nature of the failure to perform and providing a time certain (which shall be not less than ten (10) days following receipt of such notice) for correcting the failure. Such failure to perform shall otherwise be dealt within accordance with Rule 60A-1.006, F.A.C.
- A person or affiliate who has been placed on the convicted vendor list following a conviction for a public entity crime may not submit a bid on a contract to provide any goods or services to a public entity, may not submit a bid on a contract with a public entity for the construction or repair of a public building or public work, may not submit bids on leases of real property to a public entity, may not be awarded or perform work as a contractor, supplier, subcontractor, or consultant under a contract with any public entity, and may not transact business with any public entity in excess of the threshold amount provided in s. 287.017, F.S., for CATEGORY TWO for a period of thirty-six (36) months from the date of being placed on the convicted vendor list.
- The employment of unauthorized aliens by any contractor is considered a violation of Section 274A(e) of the Immigration and Nationality Act. If the contractor knowingly employs unauthorized aliens, such violation shall be cause for unilateral cancellation of the contract. In addition, pursuant to State of Florida Executive Order No. 11-116, Contractor shall utilize the U.S. Department of Homeland Security's E-Verify system to verify the employment of all new employees hired by the Contractor during the contract term. Also, Contractor shall include in related subcontracts a requirement that subcontractors performing work or providing services pursuant to the Contract utilize the E-Verify system to verify employment of all new employees hired by the subcontractor during the contract term. XXXIV.

  XXXIV. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion Lower Tier Covered Transactions
- XXXIV. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion Lower Tier Covered Transactions
   A. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

ma

- B. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal. The Department may cancel this contract if an attached explanation is not acceptable to the Department or the Federal government.
- XXXV. MyFloridaMarketPlace
  - MyFloridaMarketplace Vendor Registration
     Each Vendor doing business with the State of Florida for the sale of commodities or commodities.

Each Vendor doing business with the State of Florida for the sale of commodities or contractual services as defined in section 287.012, Florida Statutes, shall register in MyFloridaMarketPlace, in compliance with Rule 60A-1.031, Florida Administrative Code, unless exempt under Rule 60A-1.031(3) Florida Administrative Code.

B. MyFloridaMarketplace Transaction Fee

The State of Florida, through the Department of Management Services, has instituted MyFloridaMarketPlace, a statewide eProcurement system. Pursuant to section 287.057(22), Florida Statutes, all payments for commodities and/or contractual services as defined in Section 287.012, Florida Statutes, shall be assessed a Transaction Fee which the Vendor shall pay to the State, unless exempt under Rule 60A-1.031, Florida Administrative Code. Notwithstanding the provisions of Rule 60A-1.031, et seq., the assessment of a transaction fee shall be contingent upon Federal approval of the transaction fee assessment program and continued payment of applicable federal matching funds.

For payments within the State accounting system (FLAIR or its successor), the Transaction Fee shall, when possible, be automatically deducted from payments to the Vendor. If automatic deduction is not possible, the Vendor shall pay the Transaction Fee pursuant to Rule 60A-1.031(2), Florida Administrative Code. By submission of these reports and corresponding payments, Vendor certifies their correctness. All such reports and payments shall be subject to audit by the State or its designee. The Vendor shall receive a credit for any Transaction Fee paid by the Vendor for the purchase of any item(s) if such item(s) are returned to the Vendor through no fault, act, or omission of the Vendor. Notwithstanding the foregoing, a Transaction Fee is non-refundable when an item is rejected or returned, or declined, due to the Vendor's failure to perform or comply with specifications or requirements of the agreement.


Failure to comply with these requirements shall constitute grounds for declaring the Vendor in default and recovering reprocurement costs from the Vendor in addition to all outstanding fees. VENDORS DELINQUENT IN PAYING TRANSACTION FEES MAY BE EXCLUDED FROM CONDUCTING FUTURE BUSINESS WITH THE STATE


- XXXVI. The Contractor shall comply with all applicable Federal, State and County laws, ordinances, rules, and regulations applicable to the Contractor and applicable to its performance under this Contract.
- XXXVII. Contractors, providers, and partners employed by the Department or acting on behalf of the Department shall comply with Florida Administrative Code (F.A.C.), and fully comply with all information technology security policies. Contractors, providers, and partners employed by the Department or acting on behalf of the Department shall also fully comply with 60GG-2 Information Technology Standards.
- XXXVIII. If this Contract is for goods or services over \$1,000,000, this Contract may be terminated at the option of the Department if the Contractor is found to have submitted a false certification as provided under subsection 287.135(5), F.S., been placed on the Scrutinized Companies with Activities in Sudan List or the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List, or been engaged in business operations in Cuba or Syria.
- XXXIX. This Contract may be executed in multiple counterparts, each of which shall be deemed to be an original and all of which shall constitute one contract, notwithstanding that all parties are not signatories to the original or the same counterpart, or that signature pages from different counterparts are combined, and the signature of any party to any counterpart shall be deemed to be a signature too and may be appended to any other counterpart.
- In accordance with Executive Order 20-44, each contractor meeting the following criteria: 1) all entities named in statute with which the agency must form a sole source, public private agreement and 2) all entities that, through contract or other agreement with the State, annually receive 50% or more of their budget from the State or from a combination of State and Federal funds shall provide to the department an annual report in the format required by the department. This report shall detail the total compensation for the entities' executive leadership teams. Total compensation shall include salary, bonuses, cashed in leave, cash equivalents, severance pay, retirement benefits, deferred compensation, real-property gifts, and any other payout. In addition, the grantee shall submit with the annual report the most recent Return of Organization Exempt From Income Tax, Form 990, if applicable, or shall indicate that the contractor is not required to file such Form 990. Contracted entities must inform the Department of any changes in total executive compensation between the annual reports. All compensation reports must indicate what percent of compensation comes directly from the State or Federal allocations to the contracted entity. This report shall be submitted by March 1 of each year. Executive Order 20-44 may be obtained via this link, <a href="https://www.figov.com/wp-content/uploads/orders/2020/EO">https://www.figov.com/wp-content/uploads/orders/2020/EO</a> 20-44 pdf

m


### FLORIDA SCHOOL BUS SPECIFICATIONS

Effective January 1, 2023



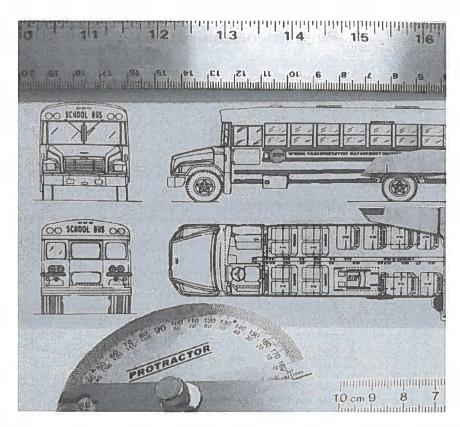





### **TABLE OF CONTENTS**

FOREWORD	ii
GENERAL INFORMATION AND WARRANTY PROVISIONS	1
SECTION I	I-1
TYPE A SCHOOL BUS MINIMUM CHASSIS SPECIFICATIONS	I-2
TYPE A SCHOOL BUS OPTIONAL CHASSIS EQUIPMENT	I-6
SECTION II	. II-1
TYPE C AND TYPE D SCHOOL BUS MINIMUM CHASSIS SPECIFICATIONS	. II-2
TYPE C AND TYPE D SCHOOL BUS OPTIONAL CHASSIS EQUIPMENT SPECIFICATIONS	II-8
SECTION III	III-1
MINIMUM SCHOOL BUS BODY SPECIFICATIONS	III-2
SCHOOL BUS BODY_EXCEPTIONSII	
OPTIONAL BODY EQUIPMENT SPECIFICATIONSII	I-19
SECTION IV	V-1
POWER LIFT EQUIPPED SCHOOL BUS MINIMUM SPECIFICATIONSI	V-2
POWER LIFT EQUIPPED SCHOOL BUS OPTIONAL EQUIPMENT SPECIFICATIONSI	V-7
SECTION V	V-1
AIR CONDITIONER SPECIFICATIONS	V-2
APPENDIX A: MINIMUM LETTERING AND LIGHTING REQUIREMENTS	A-1
APPENDIX B: COLORADO RACKING LOAD TEST	B-5
APPENDIX C: KENTUCKY POLE TEST PROCEDURES	C-1

### **FOREWORD**

Florida School Bus Specifications are adopted as authorized under section (s.) 1006.25, Florida Statutes (F.S.), and rule 6A-3.003, Florida Administrative Code (F.A.C.). The effective date of this edition of the Florida School Bus Specifications is January 1, 2023.

### **GENERAL INFORMATION AND WARRANTY PROVISIONS**

All public school buses (bodies and chassis) owned, operated, rented, leased, and contracted for by any public school board or charter school in Florida, used to transport children to and from school or school-related events, and purchased after the effective date of this document, as specified in rule 6A-3.003, F.A.C., must:

- 1. Meet or exceed the minimum requirements of these specifications;
- 2. Meet all applicable Federal Motor Vehicle Safety Standards (FMVSS); and
- 3. Meet or exceed the 2015 National School Transportation Specifications and Procedures (also referred to herein as the 2015 National Specifications), except when in conflict with the requirements herein. In such cases, the requirements specified in this document shall prevail.

The requirements specified herein are the **minimum** requirements for school buses in Florida. The date used to determine the applicability of these specifications is defined as the date the vendor receives the purchase order or signs a valid sales contract with the purchaser.

All school bus chassis and body manufacturers must certify to the Commissioner of Education, Florida Department of Education (department), by letter that all school buses offered for sale to or use by the public school systems, including charter schools, in Florida meet or exceed all standards, specifications and requirements specified herein.

Used school buses purchased or operated by a public school board or charter school in Florida must meet or exceed all federal and state requirements for public school buses that were in effect on the date the vehicle was manufactured.

Under the authority of s. 316.615, F.S., certain capacity school buses owned, operated, or leased by nonpublic schools in Florida are required to meet the specifications prescribed herein.

### **DEFINITIONS:**

- 1. School Bus (State Definition): Section 1006.25, F.S., defines a "school bus" as "a motor vehicle regularly used for the transportation of prekindergarten disability program and kindergarten through grade 12 students of the public schools to and from school or to and from school activities, and is owned, operated, rented, contracted, or leased by any district school board..."
- 2. School Bus (Federal Definition): Title 49 CFR Part 571.3 defines "school bus" as "a bus that is sold or introduced in interstate commerce for purposes that include carrying students to and from school or related events."
- 3. Multi-Function School Activity Bus (MFSAB): The state definition of MFSAB is defined by Florida school bus specifications as a school bus constructed to FMVSS and Florida school bus specifications to be used for school-related activities. MFSABs may not be used to transport students to and from school.
- 4. MFSAB (Federal Definition): Title 49 CFR Part 571.3 defines MFSAB as a school bus NOT used to transport students to and from home or school bus stops.

### **SCHOOL BUS TYPES:**

- 1. <u>Type A</u>: A school bus that is constructed using a cutaway front-section vehicle with a left side driver's door. This definition includes two classifications: Type A-1, with a Gross Vehicle Weight Rating (GVWR) of 14,500 pounds or less, and Type A-2, with a GVWR greater than 14,500 pounds and less than or equal to 21,500 pounds.
- 2. Type C: A school bus that is constructed using a chassis with a hood and front fender assembly. The entrance door is behind the front wheels. This type also includes the cutaway truck chassis or truck chassis with cab, with or without a left side door, and with a GVWR greater than 21,500 pounds. It is also known as a conventional school bus.
- 3. <u>Type D</u>: A school bus that is constructed using a stripped chassis. The entrance door is ahead of the front wheels. This type bus is also known as a rear engine or front engine transit-style school bus.

### **MFSAB:**

This can be a Type A, C, or D school bus as described above, with the following exceptions:

- <u>Identification</u>: The bus body shall bear the words "ACTIVITY BUS" in a contrasting color at least 8 inches high in the area where "school bus" is normally positioned. Lettering and numbering shall conform to FMVSS and *Florida School Bus Specifications* and shall meet reflectivity standards. The numbering on this bus may be of a contrasting color. The name of the school system shall be displayed in at least 6-inch letters on both sides of the bus in the beltline area. School or team lettering no larger than 6 inches high and logos no larger than 12 inches high may be placed below the beltline. NO additional SIGNS OR LOGOS shall be applied to any area of the bus, including the bumpers and the windows.
- Color: The local school board must determine and approve the color of the activity bus. The color scheme may use any combination of up to three colors. This combination may be in addition to an optional white roof. The color National School Bus Yellow shall not be used as a part of the color scheme. The bus wheels shall not be painted black or yellow; however, they may be painted one of the three colors selected for the bus body or may be unpainted aluminum-finished polished wheels.
- Seating: Type 2 lap/shoulder seat belts are required for all seating positions, including the driver's seat.
- <u>Lighting and Warning Devices</u>: All activity buses shall meet state and federal standards for home-to-school bus lighting and warning device requirements, with the following exceptions:
  - 1. MFSABs shall not be equipped with alternately flashing amber and red student warning signal lamps used for loading and unloading students; and
  - 2. MFSABs shall not be equipped with stop arm signals or crossing control arms.

### **WARRANTIES AND PARTS AVAILABILITY FOR NEW VEHICLES:**

All warranties listed herein must apply to all school buses manufactured after the effective date of these specifications and sold through the state school bus bid purchase program. Body and chassis manufacturers' warranty policies must allow revision of warranty start date for each vehicle to the actual in-service date by the school district. Appropriate forms to update chassis warranties must be included in the owner-operator's packet supplied with the chassis and must be conveyed along with the body warranty by the body builder to the district upon delivery of the completed unit. Above requirements must apply to the basic warranties, all component warranties and any extended warranties offered or required. There must be no hours-of-use limitation on any warranty required in these specifications or the associated state bid for school buses.

Manufacturers offering school bus chassis or bodies for sale in the state of Florida must make available replacement parts for said buses for a period of no less than 120 months.

The minimum labor rate for all warranty related repairs must be \$75.00 per hour.

### **CHASSIS WARRANTIES:**

- 1. The minimum chassis warranty shall be 12,000 miles or 12 months.
- 2. The standard chassis warranty for Florida school bus bids shall be 100,000 miles or 60 months.
- 3. Engines (including flywheel, flex plate, and harmonic balancer) on Types A, C, and D chassis must be included with both minimum chassis warranty and standard chassis warranty as described above.
- 4. Pricing requests will be added to the bid for the following extended engine warranty options:
  - a. Pricing for 60 months/150,000 miles;
  - b. Pricing for 60 months/200,000 miles; and
  - c. Pricing for 60 months/unlimited mileage.
- 5. Chassis frame rails, cross members, fuel tanks, front axle I-beams, and rear axle housings must be warranted for a period of 120 months, from the updated in-service date of the vehicle, 100 percent parts and labor.
- 6. Paint finish coats to chassis, hood, fenders, and cowl shall be warranted for 60 months/100,000 miles, 100 percent parts and labor, for adhesion, color retention, and gloss retention.
- 7. Color Retention: During the first 36 months from the in-service date, the color coat must not shift colors more than 4 ΔE from the centroid, as specified in School Bus Manufacturers Technical Council (SBMTC) publication, SBMTC-008. During the 60-month warranty period, the color coat must not shift color more than 8 ΔE from the centroid, as specified in SBMTC-008.

- 8. Gloss: During the first 36 months from the in-service date, the gloss reading must not fall below 60 at 60°. During the 60-month warranty period, the gloss reading must not drop below 30 at 60°.
  - a. All measurements must be the average of 12 readings taken at various points on the bus, but no reading must be more than three points under the stated minimum. All readings must be taken after the bus is thoroughly washed to remove road film and dust.

### **BODY WARRANTIES:**

- 1. The minimum body warranty shall be 12 months.
- 2. The standard body warranty for Florida school bus bids shall be for 60 months/100,000 miles, 100 percent parts and labor and shall include, but not be limited to, the following items:
  - a. The total air conditioner system on any bus so equipped, including parts and labor and excluding air filters used in normal preventive maintenance. Chassis engine-driven air conditioner compressor applications must be approved in writing by the engine manufacturer, who must state that the installation will not void or reduce the engine manufacturer's warranty or extended service liabilities in any way.
  - b. All mirror assemblies and mounting bracketry must be warranted against rust and corrosion and any reduction in clarity of view due to discoloration or other deterioration of the lens.
  - c. All bus body electrical wiring and switches, including, but not limited to, damage resulting from wiring or connectors becoming abraded, pierced by fasteners, shorted or otherwise damaged during manufacture or use.
  - d. Paint finish coats to body, hood, and cowl for adhesion, color retention, and gloss retention. Acceptable lower limits during the warranty period are as follows:
    - i. Adhesion: During the 60-month warranty period, paint and priming compounds must not fail to adhere to the bus with normal use and care.
    - Color Retention: During the first 36 months of service, the color coat must not shift colors more than 4 ΔE from the centroid, as specified in SBMTC-008. During the 60-month warranty period, the color coat must not shift color more than 8 ΔE from the centroid, as specified in SBMTC-008.
    - iii. Gloss: During the first 36 months of service, the gloss reading must not fall below 60 at 60°. During the 60-month warranty period, the gloss reading must not drop below 30 at 60°.
    - iv. All measurements must be the average of 12 readings taken at various points on the bus, but no reading must be more than three points under the stated minimum. All readings must be taken after the bus is thoroughly washed to remove road film and dust.
  - e. All emergency exit roof hatches, including defects in material and workmanship and against leakage.
  - f. All passenger seat back cushions and seat frames, excluding vandalism of any exposed foam.
  - g. All powered entrance doors and operating and control systems.
- 3. Power lift warranty minimums are listed below, and are not included with the standard body warranty.

### **POWER LIFT WARRANTY:**

A statement of warranty must be provided with each lift assuring the quality of materials and workmanship of the product for at least 36 months from the updated in-service date of the vehicle. The minimum warranty must provide 100 percent parts coverage for 36 months and 100 percent labor coverage for 12 months.

### **MINIMUM WARRANTY OPTIONS:**

Each manufacturer or dealer may include as part of its bid package credit option allowances for districts that wish to forego the aforementioned standard and extended warranty plans and purchase the minimum/base warranty option package.

### **TECHNOLOGY AND EQUIPMENT, NEW:**

The intent of these specifications is to accommodate new technologies and equipment that will better facilitate student transportation. New technology and equipment are acceptable for use in all vehicles if:

1. Items do not compromise the effectiveness or integrity of any major safety system. (Examples of safety systems include, but are not limited to, compartmentalization, the eight-lamp warning system, emergency exits, and the approved color scheme.)

- 2. Items do not diminish the safety of the bus interior.
- 3. Items do not create additional risk to students who are boarding or exiting the bus or are in or near the school bus loading zone.
- 4. Items do not require undue additional activity and/or responsibility for the driver.
- 5. Items generally increase efficiency and/or safety of the bus, provide for a safer or more pleasant experience for the occupants and pedestrians in the vicinity of the bus, and/or assist the driver by making his or her tasks easier to perform.

### **CHANGES OR CLARIFICATION OF SPECIFICATIONS:**

Florida School Bus Specifications may be amended pursuant to the provisions of rule 6A-3.003, F.A.C. With the concurrence of the Florida Association for Pupil Transportation (FAPT), the School Bus Specifications Committee, and in accordance with Florida purchasing laws and the bus bid contract, the School Transportation Management Section may, at its discretion, grant variances or exemptions and issue clarifications of these specifications, as necessary, to provide safe, efficient and cost-effective equipment to Florida school districts and charter schools and provide for advances in technology.

Questions regarding the *Florida School Bus Specifications* should be directed to Director, School Transportation Management Section, Florida Department of Education, 325 West Gaines Street, Suite 834, Tallahassee, Florida 32399-0400 or may be sent via email to <u>SCHTRANS@fldoe.org</u>.

### **SECTION I**

### TYPE A SCHOOL BUS MINIMUM CHASSIS SPECIFICATIONS

### **ALTERNATOR:**

Type A buses shall have a minimum 130-amp alternator. Buses equipped with an electrically powered wheelchair lift and/or air conditioning shall be equipped with the highest rated capacity available from the chassis Original Equipment Manufacturer (OEM).

### **BATTERIES**:

The storage battery, or batteries, shall have a minimum cold cranking capacity rating (cold cranking amps) equal to the cranking current required for 30 seconds at 0 degrees Fahrenheit and a minimum reserve capacity rating of 120 minutes at 25 amps. Higher capacities may be required, depending upon optional equipment and local environmental conditions.

### **BRAKE, PARKING:**

On Type A chassis, the manufacturer's standard parking brake is acceptable. On Type A chassis with hydraulic brakes, the parking brake control must be mounted for easy access by the driver. On air brake models, the control valve to set the parking brakes on the rear wheels must be dash-mounted.

### **BRAKES, SERVICE:**

Hydraulic or air brakes are permissible.

### **BUMPER, FRONT:**

Type A buses may be equipped with an OEM-supplied front bumper.

### **ENGINE EQUIPMENT:**

- 1. A dry type air cleaner is required on all engines.
- 2. The engine must be equipped with full-flow, spin-on, or cartridge-type oil filter(s), with the filter header(s) mounted directly to engine.
- 3. An engine coolant recovery or deaeration system is required on all chassis. Type A diesel engines must include a means to visually check the coolant level without removing the deaeration tank cap or releasing pressure from the cooling system.
- 4. A warning system consisting of a light and a buzzer is required on diesel-powered Type A chassis to notify the driver of low engine oil pressure and/or coolant overheating.
- 5. A fuel filtration and water separator system is required on all Type A diesel engines and must remove contaminants from the fuel prior to entry into the engine. The system must have a clear sight bowl or be equipped with a water-in-fuel light to notify technicians of the presence of water, must provide a valve for draining trapped water from the system and must include an electric or manual priming pump.
- 6. An engine oil pressure gauge is required. It must provide accurate, easily discernible readings across the entire operating range, from hot idle to full oil pressure. The gauge on engines with idle oil pressure that under normal conditions is low must provide a clear distinction between no oil pressure and engine idle oil pressure. The gauge must be directly visible to the driver in the normal seated position and must not be mounted near the center of the dash where the service door control or its associated hardware could block visibility of the gauge.
- 7. Radiator and other engine coolant hoses supplied by the chassis manufacturer (not including heater hoses) must be constructed of silicone rubber or ethylene propylene diene monomer (EPDM) covering and aramid fiber reinforcement meeting or exceeding Society of American Engineers (SAE) standard J20R EC Class D-1. The silicone hose, if used, must include stainless steel shoe-type hose clamps or constant-torque clamps. Hoses must have markings, coloring, or other visible means of distinguishing them from the standard hoses.

### **ENGINE PERFORMANCE REQUIREMENTS FOR TYPE A BUSES:**

Each bus must be furnished with a power train that meets or exceeds the following minimum criteria when tested at the gross vehicle weight rating (GVWR) required for a given bus capacity, and with all accessories (including air conditioner compressor(s), if equipped) on and operating:

- 1. Startability of 20 percent;
- 2. Gradeability of 5 percent at 25 miles per hour (MPH);
- 3. Gradeability of 1.5 percent at 50 MPH; and
- 4. Top speed of 70 MPH.

Performance must be measured with the actual completed vehicle (i.e., with the body installed, unloaded except for the driver and one passenger). The vehicle must be in drive, with the engine at idle, the service brakes applied, the emergency brakes released, and all accessories on and operating. Measurement of acceleration time must begin at the moment the throttle is applied (the throttle is to be immediately and rapidly depressed to full throttle).

NOTE: The chassis manufacturer should use the heaviest chassis/body combination meeting these specifications for the specific bus size to determine required power train components. This test is an on-road test and will be performed using the heaviest available chassis/body, depending on body(ies) supplied. At the discretion of the department, unanticipated factors or variations in test conditions affecting performance test results that are beyond the control of the chassis manufacturer may be taken into account. A Pro Link, a diagnostic computer, or a speed wheel are also acceptable tools for this test.

Maximum acceleration time (from zero mph), under the conditions specified above, must be as follows (measured in seconds):

TEST METHOD	0-10 MPH	0-20 MPH	0-30 MPH	0-40 МРН	0-50 MPH
ACTUAL	3.4	6.2	12.0	20.0	32.2

Manufacturers may offer additional engine configurations and horsepower ratings that exceed these requirements as optional equipment.

### **EXHAUST SYSTEM:**

The exhaust system on Type A buses must have a corrosion-resistant muffler and tailpipe. The tailpipe must exit to the left of left frame rail and behind the rear wheels. The chassis manufacturer must ensure that the exhaust design allows the exit location left of the left frame rail to be maintained after any modifications to frame length by the chassis or body manufacturer. Manufacturers must ensure that exhaust temperature exiting the tailpipe with the engine running during any normal loading or unloading activity will not produce first, second or third-degree burns on students or other individuals present. The bus must not automatically regenerate the diesel particulate filter while the bus is stationary.

### **FRAME SIDE MEMBERS:**

Frame side members must be of one-piece construction between the front and rear spring hangers. Frame rails of Type A chassis must have a minimum tensile strength of 50,000 pounds per square inch (PSI).

### **FRONT AXLE WHEEL SEALS:**

All Type A buses greater than 14,500 GVWR must have oil-lubricated front axles and seals.

### **FUEL TANK:**

The fuel tank filler spout must be located in an easily serviceable location.

### **HEADLIGHTS**:

Headlights must meet FMVSS and SAE standards. All buses must be equipped with Full-Time Lights (FTL) meeting the following requirements:

- 1. With the ignition switch off, the headlights will operate normally and the FTL system will not operate;
- 2. With the ignition switch on or in the "accessory" position, and with the engine not running, the FTL must not operate;
- 3. With the ignition switch on and the engine running with the headlight switch off, the FTL system must operate, providing low-beam headlights and tail, clearance, and identification (ID) lights;
- 4. In all cases, the headlight switch must override the FTL system when in the "on" position;
- 5. This system must include a buzzer that activates if the headlight system is on with the key switch in the "off" position.

### **IGNITION SYSTEM:**

All buses of like chassis manufacturer must have one key, regardless of the type of key supplied to Florida purchasers.

### **INSULATION:**

Type A chassis must include heat and noise insulation inside the bus covering the dash panel (fire wall) area to as great an extent as possible. Insulation must extend at least down to the point where the body floor connects to the fire wall, including the engine cover (doghouse), which may be insulated on the interior or exterior.

### **LINE-SET TICKET:**

The manufacturer must include with delivery of the vehicle a line-set ticket to accurately reflect all chassis components, the Gross Axle Weight Rating (GAWR) of both front and rear axles, and the gross vehicle weight rating (GVWR).

### **PAINT AND FINISH:**

School bus yellow paint must meet SBMTC-008 for color and must have a finished gloss rating of at least 85 at 60°F and a distinctness of image rating of an average of at least 50, measured using the same method specified for gloss under GENERAL INFORMATION AND WARRANTY PROVISIONS. Paint must be applied for a total dry thickness of at least 1.8 mils over all painted surfaces. Trim, lettering and the bumper must be black, except that the bumper must be striped with reflective material in accordance with National School Transportation Specifications and Procedures, Revised 2015. Steel rims for all buses with hub-piloted wheels must be National School Bus Yellow and powder-coated by the rim manufacturer. Lug nuts must not be painted. All stud-piloted rims must be painted black.

### **STEERING:**

A factory-installed tilt steering wheel/column is required.

### **TIRES AND RIMS:**

The chassis must be equipped with radial tubeless tires and must have dual rear wheels. Type A buses greater than 14,500 GVWR must use hub-piloted disc or aluminum wheels. Tires and rims must conform to current standards of the Tire and Rim Association.

### **TRANSMISSION, AUTOMATIC:**

An automatic transmission is required on all chassis. It shall be heavy-duty, with a minimum of four forward speeds, on all units. On Type A chassis, 30 capacity and larger, the transmission must be an Allison 1000 or 2000 or an approved equal. An external filter in the transmission oil cooler return line is required on Allison 1000 and 2000 equipped units. All Allison transmissions require OEM-approved synthetic transmission fluid and OEM filters.

Automatic transmissions incorporating a parking pawl must have a transmission shifter interlock controlled by the application of the service brake to prohibit accidental engagement of the transmission. All non-park pawl transmissions must incorporate a park brake interlock that requires the service brake to be applied to allow release of the parking brake.

Any requests for transmission substitutions must be approved in writing by the purchasing district and the department's School Transportation Management Section.

### **VOLTAGE CONTROL**:

The voltage regulator must be solid state (transistorized) and readily accessible for service. A voltmeter with a graduated scale is required.

### **WARRANTIES**:

See required warranties under **GENERAL INFORMATION AND WARRANTY PROVISIONS**.

### **WIRING HARNESS:**

The wiring must be rated for 100 amps load and include complete wiring for the tail and stop lights. It must be designed with color coding for circuits. The fuse box door, if equipped, must have a positive latch.

### TYPE A SCHOOL BUS OPTIONAL CHASSIS EQUIPMENT

### **AIR-SPRUNG REAR SUSPENSION SYSTEM:**

There shall be an option for an air-ride or approved equivalent air-sprung rear suspension system, when available. Rear shock absorbers are also required with this option, as on standard suspension systems.

### **AUTOMATIC TRANSMISSION WARRANTY:**

There shall be an option for extension of the transmission warranty to 5 years, unlimited mileage, 100 percent parts and labor. Also see GENERAL INFORMATION AND WARRANTY PROVISIONS.

### **COLLISION MITIGATION:**

There shall be an option for passive and/or active electronic collision mitigation system(s), if available.

### **LOW-PROFILE RADIAL TIRES:**

There shall be an option for all-wheel-position, highway-ribbed, low-profile, tubeless radial tires of size, and load range meeting Tire and Rim Association Standards for the required GAWRs.

### **SPARE DISC WHEEL:**

There shall be an option for a spare disc wheel, which must be same size and type as the original rims.

### **STABILITY CONTROL:**

There shall be an option for electronic stability control meeting the minimum requirements of FMVSS No. 136, if available.

### **STRAIGHT FLOOR CHASSIS:**

There shall be an option for Type A chassis to accept straight floor bodies (i.e., bodies with no wheel wells). This type chassis must have a combination of axles, suspension, tires, wheels, and axle stops that ensures that the maximum upward travel of the rear suspension in normal straight-ahead driving does not protrude above the top of the frame rails.

### **TOW HOOKS OR TOW EYES:**

There must be two subcategories for this option: (1) two heavy-duty front tow hooks or tow eyes (each hook or eye must be installed by the chassis manufacturer in an approved manner to each frame rail); and (2) two heavy-duty rear tow hooks or tow eyes (each hook or eye must be installed by the chassis manufacturer in an approved manner to each frame rail).

### **SECTION II**

### TYPE C AND TYPE D SCHOOL BUS MINIMUM CHASSIS SPECIFICATIONS

### **ALTERNATOR:**

Types C and D chassis with internal combustion engines shall be equipped with a heavy-duty alternator having a minimum output rating of 200 amps or higher, and should produce a minimum current output of 50 percent of the rating at engine idle speed.

Buses equipped with an electrically powered wheelchair lift and/or air conditioning shall have a minimum alternator output of 240 amps and may be equipped with a device that increases the engine idle speed when the voltage drops to, or below, a pre-set level.

### **BATTERIES:**

The storage batteries shall have minimum cold cranking capacity rating (cold cranking amps) equal to the cranking current required for 30 seconds at 0 degrees Fahrenheit and a minimum reserve capacity rating of 120 minutes at 25 amps. Higher capacities may be required, depending upon optional equipment and local environmental conditions.

### **BRAKE, PARKING:**

On hydraulic brake models, a parking brake is required, with the control mounted for easy access by the driver. On air brake models, a dash-mounted control valve to spring-set the parking brake on the rear wheels is required.

### **BRAKES, SERVICE:**

Hydraulic brakes are acceptable on 29-35 capacity Type C buses. Air brakes are required on all Type C buses larger than 41 capacity, and all Type D front and rear engine buses.

### **BUMPER, FRONT:**

Types C and D buses must have a front bumper that is black, of full width channel type, and a minimum of 8 inches wide (vertically). The bumper must have sufficient structural and mounting strength to ensure that the front of the vehicle can be lifted by means of an air bumper-type jack, without permanent deformation of the bumper, brackets, or chassis frame rail(s).

### **ENGINE EQUIPMENT:**

- 1. Diesel engines must be available in at least one of the following two configurations:
  - a. Parent bore type block; in-line 6-cylinder design; minimum 6.4 liters displacement.
  - b. Wet sleeve type block; in-line 6-cylinder design; minimum 6.4 liters displacement.

**NOTE:** Additional engines of other configurations or displacements, including gasoline, propane and CNG (not in lieu of the above), meeting all other requirements listed herein may be offered, subject to approval by the department. Electric-powered configurations may be offered and are exempt from the engine requirements listed below.

- 2. A dry type air cleaner is required. An air filter restriction indicator is required on diesel engines. The restriction indicator must incorporate a system that does not allow unfiltered air into the engine if the indicator cracks or breaks.
- 3. The engine must be equipped with a full-flow, spin-on or cartridge-type oil filter(s), with the filter header(s) mounted directly to engine.
- 4. An engine coolant recovery or deaeration system is required on all chassis. Diesel engines must include a means for visually checking the coolant level without removing the deaeration tank cap or releasing pressure from the cooling system.
- 5. A warning system consisting of a light and a buzzer is required on gasoline, propane, CNG, and diesel-powered chassis to notify the driver of low engine oil pressure and/or coolant overheating.

- 6. A fuel filtration system with a water separator is required on diesel engines and must remove contaminants from the fuel prior to entry into the engine. The system must have a clear sight bowl or be equipped with a water-infuel light to notify technicians of the presence of water, must provide a valve for draining trapped water from the system, and must include an electric or a manual priming pump.
- 7. An engine oil pressure gauge and a coolant temperature gauge are required. The oil pressure gauge must provide accurate, easily discernible readings across the entire operating range, from hot idle to full oil pressure. Gauges on engines with idle oil pressure, which under normal conditions is low, must provide a clear distinction between no oil pressure and engine idle oil pressure. Gauges must be directly visible to the driver in the normal seated position and must not be mounted near the center of the dash where the service door control or associated hardware could block visibility of the gauges.
- 8. Radiator and other engine coolant hoses supplied by the chassis manufacturer (not including heater hoses) must be constructed of silicone rubber or ethylene propylene diene monomer (EPDM) covering and aramid fiber reinforcement meeting or exceeding SAEJ20R EC Class D-1. Silicone hose, if used, must include stainless steel shoe-type hose clamps or constant-torque clamps. Hoses must have markings, coloring or other visible means of distinguishing them from standard hoses.
- 9. Manufacturers must use the largest capacity oil pan available for each engine configuration in order to achieve the longest duration oil change interval.

### **ENGINE PERFORMANCE REQUIREMENTS:**

Each bus must be furnished with a power train that meets or exceeds the following minimum criteria when tested at the GVWR required for a given bus capacity, and with all accessories (including air conditioning compressor(s), if equipped) on and operating:

- 1. Startability of 20 percent;
- 2. Gradeability of 5 percent at 25 miles per hour;
- 3. Gradeability of 1.5 percent at 50 miles per hour; and
- 4. Minimum top speed of 60 miles per hour.

NOTE: The chassis manufacturer should use the heaviest chassis/body combination meeting these specifications for the specific bus size to determine required power train components. This test is an on-road test and will be performed using the heaviest available chassis/body, depending on body or bodies supplied. At the discretion of the department, unanticipated factors or variations in test conditions affecting performance test results that are beyond the control of the chassis manufacturer may be taken into account. A Pro Link, a diagnostic computer or a speed wheel are also acceptable tools for this test.

Maximum acceleration time (from zero mph), must be as follows (measured in seconds): Performance must be measured with the actual completed vehicle (i.e., with body installed, unloaded except for the driver and one passenger). The vehicle must be in drive, with the engine at idle, the service brakes applied, the emergency brakes released, and all accessories on and operating. Measurement of acceleration time must begin at the moment the throttle is applied (the throttle is to be immediately and rapidly depressed to full throttle).

29-77 Capacity Types C and D:

TEST METHOD	0-10 MPH	0-20 MPH	0-30 MPH	0-40 MPH	0-50 MPH
ACTUAL	3.4	6.2	12.0	20.0	32.2

78-90 Capacity Type D:

TEST METHOD	0-10 MPH	0-20 MPH	0-30 MPH	0-40 MPH	0-50 MPH
ACTUAL	3.7	7.1	12.0	20.0	32.2

Manufacturers may offer additional engine configurations and horsepower ratings that exceed these requirements as optional equipment.

### **EXHAUST SYSTEM:**

The exhaust system must have a corrosion-resistant muffler and tailpipe. The tailpipe must exit to the left of left frame rail and behind the rear wheels. Manufacturers must ensure that exhaust temperature exiting the tailpipe with the engine running during any normal loading or unloading activity will not produce first, second, or third-degree burns on students or other individuals present. The bus must not automatically regenerate the diesel particulate filter while the bus is stationary. Also see Section III, Electrical Equipment and Wiring.

### **FRAME SIDE MEMBERS:**

Frame side members must be of one-piece construction between the front and rear spring hangers. Frame rails must have a minimum tensile strength of 50,000 pounds per square inch (PSI).

### FRONT AXLE LUBRICATION:

All buses must have oil-lubricated front axle hubs, providing an externally visible means of checking the lubricant level.

### **HEADLIGHTS:**

Headlights must meet FMVSS and SAE standards. All buses must be equipped with Full-Time Lights (FTL) meeting the following requirements:

- 1. With the ignition switch off, the headlights will operate normally and the FTL system will not operate.
- 2. With the ignition switch on or in the "accessory" position, and with the engine not running, the FTL must not operate.
- 3. With the ignition switch on and the engine running with the headlight switch off, the FTL system must operate, providing low-beam headlights and tail, clearance and identification (ID) lights.
- 4. In all cases, the headlight switch must override the FTL system when in the "on" position.
- 5. This system must include a buzzer that activates if the headlight system is on with the key switch in the "off" position.

### HOOD:

Engine hood on Type C buses must not require more than 20 pounds of force to open or close.

### **IGNITION SYSTEM:**

All ignition switches must be keyed alike. All buses of like chassis manufacturer and type must have one key.

### INSULATION:

Type C chassis must include full width and height heat and noise insulation on the inside or outside of the bus covering the dash panel (firewall) area to as great an extent as possible and at least up to the top of the firewall and down to the point that the body floor connects to the firewall, including the engine cover (doghouse). Type D Front Engine buses must include complete heat and noise insulation of the doghouse area.

### LINE-SET TICKET:

Manufacturer must include with delivery of vehicle a line-set ticket to accurately reflect all chassis components, GAWR of both front and rear axles, and GVWR.

### PAINT AND FINISH, TYPES C and D CHASSIS:

School bus yellow paint must meet SBMTC-008 for color and must have a finished gloss rating of at least 85 at 60°F and a distinctness of image rating of an average of at least 50 measured using the same method specified for gloss under GENERAL INFORMATION AND WARRANTY PROVISIONS. Paint must be applied for a total dry thickness of at least 1.8 mils over all painted surfaces. Trim, lettering and bumper must be black, except that bumper must be striped with reflective material in accordance with <a href="National School Transportation Specifications and Procedures, Revised 2015">National School Transportation Specifications and Procedures, Revised 2015</a> and Procedures or these specifications. Steel rims must be powder-coated, National School Bus Yellow, by the wheel manufacturer. Lug nuts must not be painted.

**NOTE:** MFSAB is excluded from the school bus yellow color requirement of this section; however, all other paint rating requirements shall apply. See MFSAB requirements under <u>GENERAL INFORMATION AND WARRANTY PROVISIONS</u> beginning on page 1.

### **RADIATOR FILLER TUBE:**

The radiator filler must be located for ease of service from the engine compartment on Type C and Type D rear engine buses. It must be located for ease of service from outside the bus on Type D front engine buses.

### **STABILITY CONTROL:**

Electronic stability control meeting the minimum requirements of FMVSS No. 136 is required.

### **STEERING:**

A tilt steering wheel/column is required.

### **TIRES AND RIMS:**

Chassis must be equipped with radial tubeless tires mounted on aluminum or hub-piloted disc wheels. Tires and rims must conform to current standards of the Tire and Rim Association (see Chassis Specifications Charts for sizes). See PAINT AND FINISH for wheel color information.

### **TRANSMISSION, AUTOMATIC:**

An automatic transmission is required on all chassis as specified:

- 1. Type C 29-47 capacity, Allison PTS 2100, 5-speed or Ford 6R140, 5-speed or approved equal.
- 2. Type C 65-78 capacity, Allison PTS 2500, 5-speed or Ford 6R140, 5-speed or approved equal.
- 3. Type D 71 capacity front engine, Allison PTS 2500, 5-speed or approved equal.
- 4. Type D 78-89 capacity front engine, Allison PTS 2500, 5-speed or approved equal.
- 5. Type D 72 capacity rear engine, Allison PTS 2500, 5-speed or approved equal.
- 6. Type D 78-89 capacity rear engine, Allison PTS 3000, 6-speed or approved equal.

All requests for transmission substitutions must be approved in writing by the purchasing district and by the department's School Transportation Management Section.

Allison PTS 2000 series transmissions must include an external spin-on type, vertically mounted transmission fluid filter. The shifter must be dash- or console-mounted and must be either a T-handle or push-button design.

Allison PTS 3000 series transmissions must have at least 5 speeds enabled for front engine Type D and 6x speeds for rear engine Type D.

All transmissions require synthetic or OEM approved equal transmission fluid and must use OEM filters.

Automatic transmissions incorporating a parking pawl must have a transmission shifter interlock controlled by the application of the service brake to prohibit accidental engagement of the transmission. All non-park pawl transmissions must incorporate a park brake interlock that requires the service brake to be applied to allow release of the parking brake.

### **WIRING HARNESS:**

All chassis electrical wiring must conform to current standards of the Society of Automotive Engineers, be coded by color, and be insulated and completely encased in convoluted loom or equivalent protective wrapping. In locations that prevent such looming, wires must be properly held in place by appropriate fasteners at intervals necessary to prevent possible damage to wire insulation. The fuse box door, if equipped, must have a positive latch. All chassis electrical circuits must be fused per the requirements of FMVSS. Buses using multiplexed electrical systems may meet the intent of these specifications without the use of specified equipment, subject to approval by the department.

### TYPE C CHASSIS:

TILE CHASSIS:						
Maximum Design (Passenger) Capacity	29LT	29	47	65	71	77
the state of the s	Control Control	The second secon		The second of the contract of	and the state of t	
Front Axle Weight Rating (pounds)	5,000	6,000	7,000	00006	10,000	10.000
Rear Axle Weight Rating (pounds)	10,000	13,000	15,000	19,000	19,000	20,000
Cowl to axle, minimum (inches)	123	123	162	229	250	250
Tires – minimum size, Load Range; tubeless-radial ply*	225R-19.5F	10R-22.5-F	11R-22.5-G	11R-22.5-G	11R-22.5-G	11R-22.5-G
Disc wheels – minimum rim width (inches)	6.75	7.5	8.25	8.25	8.25	8.25
Hub-piloted disc wheels for tubeless radial tires	6 stud,	6 stud,	10 stud,	10 stud,	10 stud,	10 stud,
	5 hand hold	5 hand hold	2 hand hold	2 hand hold	2 hand hold	2 hand hold
Minimum size fuel tank (gallons)	30	30	09	09	09	09
Allison transmission series (# of forward gears)	PTS 1000 or					
TT IVIUST INCIUDE park pawi.	7200 (5)**	PTS 2100 (5)	PTS 2100 (5)	PTS 2500 (5)	PTS 2500 (5)	PTS 2500 (5)

## TVPE D FORWARD CONTROL FRONT FUCINE

IYPE D FORWARD CONTROL FRONT ENGINE:	••			
Maximum Design (Passenger) Capacity	71	11	83	68
	The second secon		C. C	1 S 1 S 1 S 1 S 1 S 1 S 1 S 1 S 1 S 1 S
Front Axle Weight Rating (pounds)	10,800	12,000	12,000	12.000
Rear Axle Weight Rating (pounds)	17,000	19,000	21,000	23,000
Tires - minimum size, Load Range acceptable*	3G	11R-22.5G	11R-22.5-G	11R-22.5-G
Hub-piloted disc wheels-10 stud, minimum rim width	8.25,	8.25,	8.25.	8.25.
(inches)	i hold	2 hand hold	2 hand hold	2 hand hold
Minimum size fuel tank (gallons)	09	09	09	09
Allison transmission series (# of forward gears)	PTS 2500 (5)	PTS 3000 (5)	PTS 3000 (5)	PTS 3000 (5)

An automatic transmission is required on all chassis. See TRANSMISSION, AUTOMATIC for required specifications.

Maximum overall length of the bus must not exceed 45 feet, bumper to bumper.
\*Low-profile tubeless radial tires of size and load range meeting Tire and Rim Association Standards for the required GAWRs may be approved in lieu of standard conventional tubeless radial tires.

TYPE D REAR ENGINE CHASSIS SPECIFICATIONS CHART:

THE CHARLES IN COLUMN TO SECURITION OF THE SECURITION OF THE COLUMN TO SECURITION OF THE SECURITION OF THE SECURIT	CARA I .			
Maximum Design (Passenger) Capacity	72	78	84	06
				See that the second of the second
Front Axle Weight Rating (pounds)	11,000	12,000	12.000	12.000
Rear Axle Weight Rating (pounds)	19,000	21,000	23,000	23.000
Tires - minimum size, Load Range acceptable *	11R-22.5-G	11R-22.5-G	11R-22.5-G	11R-22 5-G
Hub-piloted disc wheels-10 stud, minimum rim width (inches) 8.25, 2 hand hold	8.25, 2 hand hold	8.25, 2 hand hold	8.25. 2 hand hold	8 25. 2 hand hold
Minimum size fuel tank (gallons)	09	, 09	, 09	09
Allison transmission series (# of forward gears)	PTS 2500 (5)	PTS 3000 (6)	PTS 3000 (6)	PTS 3000 (6)
Movimum langth of which amint and arread 15 feet 1.				

Maximum length of vehicle must not exceed 45 feet, bumper to bumper.
\*Must meet Tire and Rim Association Standards. Low-profile tubeless radial tires of size and load range meeting Tire and Rim Association Standards for the required GAWRs may be approved in lieu of standard conventional tubeless radial tires.

# TYPE C AND TYPE D SCHOOL BUS OPTIONAL CHASSIS EQUIPMENT SPECIFICATIONS

#### **AIR-SPRUNG FRONT SUSPENSION SYSTEM:**

There shall be an option for an air-ride or approved equivalent air-sprung front suspension system, when available. Front shock absorbers are also required with this option, as on standard suspension systems.

#### **AIR-SPRUNG REAR SUSPENSION SYSTEM:**

There shall be an option for an air-ride or approved equivalent air-sprung rear suspension system, when available. Rear shock absorbers are also required with this option, as on standard suspension systems.

#### **ALTERNATOR, HIGHER OUTPUT:**

There shall be an option for alternators having a minimum of 270 amps hot-rated output.

#### **COLLISION MITIGATION:**

There shall be an option for passive and/or active electronic collision mitigation system(s), if available.

#### **ELECTRIC SCHOOL BUS (ESB):**

This specification is for new electric school buses only and does not allow for the modification of any existing school bus.

#### **COMPLIANCE WITH FMVSS:**

All electric systems shall be in full compliance with all applicable FMVSS and all Society of Automotive Engineers standards that are applicable at time of manufacture.

#### **ADDITIONAL REQUIREMENTS:**

#### **CHARGING:**

- 1. Charging connection point shall be outside the passenger compartment.
- 2. While charging, the transmission/propulsion system shall be rendered inoperative.
- 3. Shall have AC or DC charging capabilities with standard SAE J1772 CCS1 connector.
- 4. Shall be V2G (Vehicle to Grid) capable.

#### **ELECTRIC POWER SOURCE (BATTERY):**

- 1. Shall not be located in or accessible from the interior of the school bus.
- 2. Shall be designed to prevent the passenger compartment from becoming energized.
- All batteries shall be designed to prevent any dangerous fluids or fumes from entering the passenger area.
- 4. There shall be a disconnect switch or device to shut-off the high voltage components at the power source in the event of a crash.
- 5. Battery packs shall be liquid cooled.
- 6. Battery and electrical drive component warranty shall be a minimum of 5 years/100,000 miles

#### **HEATING:**

Heaters shall be capable of heating the passenger and driver's compartments.

#### **INSTRUMENT DISPLAY:**

The instrument display panel must also contain an indicator showing the state of charge (power and/or range).

#### **MARKINGS:**

- 1. The outer layer of insulation or wiring conduit for drive system high-voltage wiring shall be industry standard orange color.
- 2. All high-voltage components shall be labeled with a "high voltage" marking/warning.
- 3. An electric vehicle identifying label shall be affixed on the right rear corner of the bus body. An additional label shall be applied to the right side of the bus rearward of the entrance door and to the left side of the bus aft of the driver's window.

#### **POWER DISCONNECT:**

- 1. A power disconnect device or switch shall be provided.
- 2. This disconnect device or switch shall be clearly marked.
- 3. If located inside a compartment, the compartment shall be clearly marked.
- 4. This device or switch shall not be in or accessible from the passenger area.
- 5. There shall be a label affixed near the battery disconnect switch to identify its location for first responders.

#### **POWER REGENERATION:**

When the unit is in motion and the driver removes his/her foot from the accelerator, power regeneration occurs.

#### PROPULSION SYSTEM /DRIVETRAIN

- 1. Shall be of sufficient power and torque to propel the vehicle fully loaded up to at least 60 mph and no more than 70 mph.
- 2. The propulsion system may be mounted using a drivetrain or positioned in a way to provide power to the wheels.
- 3. All propulsion systems must be contained below the floor line and cannot come into contact with the road surface.
- 4. Propulsion system warranties shall be a minimum 5 years/100,000 miles.

#### **SEATING:**

All seats shall be mounted to minimize contact with batteries and underside of the bus if seat replacement is necessary.

#### **SOUND GENERATION:**

All electric school buses shall comply with FMVSS 141 and produce a constant sound level for pedestrian alert while in motion under 20 mph.

#### **HIGH CAPACITY FUEL TANK:**

There shall be an option for a fuel tank of higher capacity than the standard fuel tank, mounted on the right side or between the frame rails, when available.

#### **LOW-PROFILE RADIAL TIRES:**

There shall be an option for all-wheel-position, highway-ribbed, low-profile tubeless radial tires of size and load range meeting Tire and Rim Association Standards for the required GAWRs.

#### **SPARE DISC WHEEL:**

There shall be an option for a spare disc wheel, which must be same size, type, and color as the original rims.

#### **TOW HOOKS OR TOW EYES:**

There shall be an option for two heavy-duty tow hooks or tow eyes, installed by manufacturer on each frame rail at the front of the bus in an approved manner. The manufacturer may also offer rear-mounted tow hooks or tow eyes meeting these requirements.

# **STRAIGHT FLOOR CHASSIS:**

There shall be an option for a chassis designed to accept straight floor bodies (i.e., bodies with no wheel wells). This type of chassis must have a combination of axles, suspension, tires, wheels, and axle stops that ensures that the maximum upward travel of the rear suspension in normal straight-ahead driving does not protrude above the top of the frame rails.

#### **TIRES**:

There shall be an option for alternate brand, size, and tread designs of tires when available. Optional tires must meet GAWR requirements and Tire and Rim Association Standards.

[Page Intentionally Blank]

# **SECTION III**

# MINIMUM SCHOOL BUS BODY SPECIFICATIONS

The specifications set forth in this section apply to Types A, C, and D school buses. Special exceptions for Type D bodies are listed at the end of this section. The completed school bus must meet all Federal Motor Vehicle Safety Standards, requirements of the State of Florida and requirements of the National School Transportation Specifications and Procedures. Revised 2015 (state specifications supersede national specifications). References to bus capacity within these specifications are for Maximum Design Capacity, as defined below under **BODY DATA PLATE**.

#### **BATTERY DISCONNECT SWITCH:**

There must be a battery disconnect switch in the air conditioning (A/C) or battery compartment or within 3 feet of the battery box if no A/C box is available. This switch must be accessible and operable from the exterior of the bus. Electronic control modules may be connected to battery power per the manufacturer's discretion; however, any circuit that does not become an open circuit with the actuation of the battery disconnect switch must be fused appropriately at the power source and labeled so each circuit is easily identifiable.

#### **BODY DATA PLATE:**

A durable data plate must be mounted inside the body in a clearly visible location. The body data plate information must include a listing of the "Maximum Design Capacity" and the "Equipped Capacity" of the body. Maximum Design Capacity must be the maximum number of passengers the bus (body shell size) can carry, based on 12.8 inches minimum seat width per passenger, with the minimum knee room (seat spacing) permitted by FMVSS No. 222. Equipped Capacity must be the actual passenger capacity of the finished body, as equipped by the manufacturer, based on:

- 1. The number of total passengers the installed bench seats are designed to carry; and
- 2. The number of wheelchair positions installed (based on wheelchair space dimensions contained in Section IV of these specifications); and
- 3. An example of the format to be used for Equipped Capacity is "28 + 3 WC," meaning 28 standard passenger seats plus 3 wheelchair positions.

#### **BODY FLUID CLEANUP KIT:**

Each bus must be equipped with a disposable, sealed body fluid cleanup kit mounted by a method that will retain it under a load equivalent to 20 times the weight of the kit and must be removable without the use of tools. The kit must be accessible to the driver. The kit container must be sealed with a breakable, non-reusable seal, with the following items:

- 1. A U.S. Environmental Protection Agency (EPA) registered liquid germicide (tuberculocidal) disinfectant;
- 2. A fully disposable wiping cloth;
- 3. A water-resistant spatula;
- 4. Step-by-step directions;
- 5. Absorbent material with odor counteractant;
- 6. Two pairs of gloves (Nitrile);
- 7. One package towelettes; and
- 8. A discard bag (non-labeled paper bag with plastic liner and a twist tie). This bag must be approximately 4 x 6 x 14 inches and of a non-safety color (i.e., not red, orange, or yellow).

#### **BUMPER, REAR:**

The rear bumper must be of pressed steel channel at least 3/16 inch thick, 8 inches wide (vertically), and flanged 2 inches at the top and bottom, or otherwise designed to furnish equal flexural strength. It must be of wraparound design and securely fastened to each chassis rail and braced from each end of bumper to chassis rail with heavy braces. The bumper must have the structure and strength necessary to allow the unloaded vehicle to be lifted with a bumper jack without deformation or damage. The contour of the bumper must fit the contour of the body in a manner to prevent

hitching to or riding on the bumper. An appropriate seal must be applied between the bumper and the body panel, unless the gap between the bumper and the body panel is 1/8 inch or less.

#### **DRIVER'S DOCUMENT COMPARTMENT:**

On Types C and D buses, a pouch on the front side of the driver's side crash barrier with minimum dimensions of  $17 \times 12 \times 4$  inches is required. This pouch must be located to the left side of the barrier for Type B and C buses, and to the right side of the barrier for Type D buses, accessible to the driver from the seated position. It must be made of the same material as the covering on the barrier and have a lid or cover with a latching device such as Velcro<sup>TM</sup> or snaps.

#### **DRIVER'S SEAT:**

All school buses must have a driver's seat equipped with a one-piece high back designed to minimize the potential for head and neck injuries in rear impacts, provide minimum obstruction to the driver's view of passengers, and meet applicable requirements of FMVSS No. 222. The height of the seat back must be sufficient to provide the specified protection for up to the size of a 95th percentile adult male, as defined in FMVSS No. 208. The driver contact area of the cushion and seat back must be made of soil and wear-resistant cloth material, nylon, or an equivalent. The remainder of the seat may be of a different material. The seat must be centered behind the steering wheel, with the backrest a minimum distance of 11 inches behind the steering wheel. The seat must be securely mounted to ensure minimal flexing of the seat and the floor panel(s).

All school buses equipped with air brakes must also be equipped with an air suspension driver's seat meeting the following additional requirements:

- 1. The air control for the height adjustment must be within easy reach of the driver in the seated position.
- 2. The seat cushion must be a minimum of 19 1/2 inches wide, be fully contoured for maximum comfort, and have a minimum of two positions to allow adjustment of seat bottom angle.
- 3. The backrest must include adjustable lumbar support.
- 4. The seat must have a minimum of 7 inches fore and aft travel, adjustable with the driver in the seated position. This requirement applies to the seat mechanism.
- 5. The seat must have a minimum of 4 inches up and down travel.
- 6. The seat back must include adjustability of tilt angle.
- 7. All adjustments must be by fingertip controls not requiring the use of tools.
- 8. Air suspension seats must be dampened by dual shock absorbers that act independently.
- 9. The seat must comply with all applicable Federal Motor Vehicle Safety Standards.
- 10. All other buses must have a driver's seat equipped with a hydraulic and/or spring suspension base, and a minimum seat cushion width of 19 inches, and must meet the other requirements listed herein for air suspension seats.

The chassis manufacturer's standard driver's seat is acceptable for Type A buses. Also, see **GENERAL INFORMATION AND WARRANTY PROVISIONS**.

#### **DRIVER'S SEAT BELT:**

Buses must be equipped with a Type 2 lap belt/shoulder harness seat belt assembly for the driver. The design must incorporate a fixed female push-button latch on the right side at seat level, and a male locking bar tongue on the left, retracting side. The assembly must be equipped with a single, dual sensitive Emergency Locking Retractor (ELR) for the lap and shoulder belt. This system must be designed to minimize cinching down on suspension type seats. The lap portion of the belt must be anchored or guided at the seat frame by a metal loop or other means at the right side of the seat to prevent the driver from sliding sideways out of the seat. There must be a minimum of 7 inches of adjustment of the "D" loop of the driver's shoulder harness, designed to provide adequate adjustment for all sizes of drivers within the range of a 5th percentile female to a 95th percentile adult male, as defined in FMVSS No. 208. Shoulder belt tension must be no greater than is necessary to provide reliable retraction of the belt and removal of excess slack. The seat belt assembly and anchorage must meet applicable FMVSS. Seat belt material must be bright orange in color to provide maximum contrast with the driver's clothing.

**NOTE:** The driver's seat belt assembly for Type A buses must be the manufacturer's standard Type 2 driver seat belt, meeting applicable FMVSS for school buses of 10,000 pounds GVWR and less.

#### **ELECTRICAL EQUIPMENT AND WIRING:**

All wiring must conform to current SAE standards, be coded by color and be insulated. All joints must be soldered or joined by equally effective fasteners. All wires connected directly to the battery must have the end terminals protected with heat-shrink tubing. Body wiring and connectors, including any battery cables routed by the body manufacturer, must be routed so as to eliminate the possibility of wiring and connectors becoming abraded, pierced by fasteners, shorted, or otherwise damaged during manufacture and use. All chassis and body electrical wiring must be completely encased in convoluted loom or equivalent protective wrapping. In locations that prevent such looming, wires must be properly held in place by appropriate fasteners at intervals necessary to prevent possible damage to wire insulation. A complete body wiring diagram showing the location of wires and the code of circuits for buses meeting Florida Specifications must be installed in each body. Additionally, for all school bus body optional electronic components installed in the bus, the body manufacturer must provide each district with at least one comprehensive parts and repair manual. Buses using multiplexed electrical systems may meet the intent of these specifications without the use of specified equipment subject to approval by the department. All requirements listed herein for Light Emitting Diode (LED) type lights must be for the latest generation LEDs available at the time of manufacture. Electrical components specified below must be provided, and wiring must be in circuits, as follows:

#### **ACCESS PANEL, ELECTRICAL:**

All Type C and D buses must be equipped with an electrical access panel to provide access to body electrical components and circuits.

#### **BACKUP LIGHTS; BACKUP ALARM and DECAL:**

There must be two backup lights of 4 inches in diameter, or 12.5 square inches, on the rear of all bodies meeting the following requirements:

- 1. They must be sealed LED lights;
- 2. They must use a plug connector; and
- 3. They must be set into the bus body (flush-mounted).

The body manufacturer must provide a backup alarm on each bus to provide audible warning that the bus is in reverse gear. The alarm must meet the requirements of SAE J994 and have a variable volume feature that allows the alarm to vary from 87 dBA to 112 dBA sound level, staying at least 5 dBA above the ambient noise level.

All buses must have a decal in full view of the driver indicating that the bus is equipped with a backup alarm.

#### **BRAKE/TAIL LAMPS, LARGE:**

Buses must be equipped with two combination LED type brake/tail lamps of a minimum of 7 inches in diameter or 38 square inches, mounted as high and spaced as far apart laterally as practical, below the window line, but not less than 3 feet measured from the center of the lamps. Also, they must use a plug type connector meeting FMVSS and SAE standards.

#### **BRAKE/TAIL LAMPS, SMALL:**

Buses must be equipped with two combination brake/tail lamps of 4 inches in diameter or 12.5 square inches, meeting FMVSS. Light intensity must at least equal Class A turn signal units. These lights must be LED lights with smooth exterior lens surfaces. They must use a plug connector and be set into the bus body.

#### **CIRCUIT BREAKERS:**

All body electrical circuits must be fused per the requirements of FMVSS. The main body electrical circuit must be protected by a manually resettable circuit breaker or fusible link.

#### **LICENSE PLATE LAMP:**

Must be LED and may be combined with one of the required combination brake/tail lamps.

#### MASTER SWITCH FOR BODY ELECTRICAL CIRCUITS AND OTHER SWITCHES:

All bodies must be equipped with an electrical circuit master switch that will turn body circuits ON and OFF by means of a solenoid (relay) controlled by the ignition switch. There must also be a manual noise abatement switch installed in the control panel, labeled and alternately colored, and wired into the activation circuit for the master body circuit solenoid. This must be an on/off switch that deactivates all body equipment that produces noise, including, at least, the AM/FM radio, heaters, air conditioners, fans, and defrosters. This switch must not deactivate safety systems such as windshield wipers or lighting systems. On Types C and D buses there must also be a switch mounted in a location inaccessible to the driver to manually start the diesel particulate filter regeneration process. This switch must be appropriately labeled.

#### **POST-TRIP PASSENGER CHECK SYSTEM:**

#### **System Requirements:**

- 1. The bus must be equipped with a system to require the driver to walk to the rearmost interior of the bus after each trip to deactivate the system via a push button and to ensure that no passengers are left on the bus. The system must interconnect with the entrance door (and the driver's door on Type A buses) and immediately activate if the door is opened when the system is armed.
- 2. The system must have an indicator light in view of the driver that is illuminated when the system is armed. The system must be armed any time the bus is in service transporting students. This may be accomplished through the use of any reasonable method, such as recording a speed above 20 MPH or exceeding 10 minutes of operation with the door closed. In all cases, the system must arm itself after 10 minutes of operation, and/or any time the red student warning lights are activated.
- 3. The system may not be disarmed until the vehicle ignition switch has been switched to the "off" position. The system must not be activated if the ignition switch is placed in the accessory position or if the bus is restarted.
- 4. The system must turn on the interior lights when the ignition switch is turned to the "off" position. The lights must remain on for 60 seconds after system deactivation.
- 5. The system must not have a bypass.
- 6. The system must sound the vehicle horn and flash the headlights if the driver fails to deactivate the system within 60 seconds of turning the ignition off. Type A buses may activate the red student warning lights in lieu of the headlights.
- 7. The system must be disarmed by the use of a push button switch placed on the left rear bulkhead or above the left rear passenger window for Types A, C, and D front engine (FE) buses. The push button must be placed above the left rear passenger window for Type D rear engine (RE) buses. This button must be clearly marked.

#### **System Definitions:**

- 1. Armed = The system is functioning and is ready to alarm.
- 2. Disarmed = The system is off and inactive.
- 3. Activated = The horn is blowing and the lights are flashing.
- 4. Deactivated = The disarm switch at the rear of the bus has been operated by the driver.

#### **System Functionality:**

- 1. The system must be fully automatic in function and must not provide for manual bypass or override capability under any circumstances.
- 2. From the bus sitting still with ignition key in the "off" position:
  - a. With the ignition key switched to the "accessory" position, the system remains disarmed.
  - b. With the ignition key switched to the "on" position (engine remaining off), the system remains disarmed.
  - c. With the ignition key switched to the "on" position (engine running) and the bus operated under 20 MPH, the system remains disarmed.
  - d. With the ignition key switched to the "on" position (engine running) and the bus operated over 20 MPH or for more than 10 minutes of continuous operation (or other reasonable operational trigger mechanism), the system is armed.
- 3. From bus having been operated over 10 minutes, no longer moving, with the entrance door (and driver's door, if equipped) closed, the ignition key in the "on" position (engine running) and the system armed:
  - a. With the ignition key switched to "off" position (engine off), the interior dome lights are immediately illuminated.
  - b. With the ignition key switched to the "off" position (engine off) and the ignition key switched back to the "on" position (engine off or restarted) within 60 seconds, the interior dome lights are extinguished and the system remains armed, but flashing lights and horn alarms are not activated.
  - c. With the ignition key switched to the "off" position (engine off), interior dome lights illuminated and entrance door (or driver's door, if equipped) opened, flashing light and horn alarms are activated.
  - d. With the ignition key switched to the "off" position (engine off), interior dome lights illuminated and the driver taking no action for 60 seconds, the flashing lights and horn alarms are activated.
  - e. With the ignition key switched to the "off" position (engine off), interior dome lights illuminated, and driver walking to the rear of the bus and disarming the system within 60 seconds, the system is disarmed and no flashing lights and horn alarms are activated.
- 4. Once the flashing lights and horn alarms are activated, they can be deactivated only by disarming the system at the rear of the bus.
- 5. The interior dome lights are extinguished 60 seconds after the system is disarmed.

# STUDENT WARNING LIGHTS, STOP ARMS, STUDENT CROSSING ARM, AND SYSTEM CONTROLS AND OPERATION:

#### **Student Warning Lights:**

Must be dual-mounted side by side on all corners of bus roof caps. Mounting must be as high as practical on the top and as near the outer edge of the bus as curvature permits. The lamps must be securely mounted. There must be a black background that is at least 1½ inches wide. The lamps installed in the outboard locations must be red; the lamps installed in the inboard locations must be amber. The lamps must be clearly visible in bright sunlight for a minimum of 500 feet. Additionally, student warning lights must:

- 1. Have light assemblies of a flat back design. Cutouts in roof caps must be no larger than necessary to accommodate the student warning lights wires. A flush-mounted design is acceptable.
- 2. Use strobing LED bulbs.

3. Be 7 inches in diameter or 38 square inches minimum.

#### **System Controls:**

Must be equipped with the following driver-actuated controls:

- 1. Master switch provides means for deactivating the entire system, as would be required when opening the door at a railroad grade crossing.
- 2. Control switch three positions: OFF, AMBER, and RED. The switch may be a rocker, pull-type, or other switch providing three positions. This switch must be separated from the master switch by at least 1 inch and colored red.
- 3. Switch actuated by the service door.
- 4. Controls must provide for the combinations of switch positions and conditions of student warning lights, stop arm(s), stop arm lights, and audible alarm, as indicated on the chart below.

**NOTE:** The system must not be designed in such a way that the operator is required to actuate the controls in a particular sequence to achieve the desired combination of conditions. For example, if the driver places the three-position switch in the AMBER position, with the master switch ON, it must not be required that the three-position switch be moved to RED or that the service door be opened in order to deactivate the AMBER lights. In this example, the driver must be able to deactivate the AMBER lights by going directly from the AMBER to the OFF position.

With Master Switch, Control Switch, and Service Door in the Following Positions:					Condition of Stop Arm(s), Stop Arm Lights, AMBER and RED Student Warning Lights and Audible Alarm Must Be:					
	MASTER SWITCH POSITION (ON or OFF)	CONTROL SWITCH POSITION (three positions: OFF, AMBER or RED)	SERVICE DOOR POSITION		STOP ARMS, STOP ARM LIGHTS	AMBER STUDENT WARNING and PILOT LIGHTS	RED STUDENT WARNING and PILOT LIGHTS	AUDIBLE ALARM		
1	ON	OFF	CLOSED	1	RETRACTED, OFF	OFF	OFF	OFF		
2	ON	OFF	OPEN	2	RETRACTED, OFF	OFF	ON	ON		
3	ON	AMBER	CLOSED	3	RETRACTED, OFF	ON	OFF	OFF		
4	ON	AMBER	OPEN	4	RETRACTED, OFF	OFF	ON	ON		
5	ON	RED	CLOSED	5		OFF	ON	OFF		
6	ON	RED	OPEN	6	EXTENDED, ON	OFF	ON	OFF		
7	OFF	ANY POSITION	ANY POSITION	7	RETRACTED, OFF	OFF	OFF	OFF		

#### **Student Crossing Arm:**

Is required and must be:

- 1. Air-operated on all air brake-equipped buses.
- 2. Electrically operated on all hydraulic brake buses.
- 3. Mounted to the far right side of the front bumper and open to an angle perpendicular to the bus.
- 4. Designed so that all components and connections are weatherproofed.
- 5. Removable with hand tools for towing of the bus.
- 6. Designed to meet or exceed SAE Standard J1133.
- 7. Constructed of noncorrosive or nonferrous material or treated in accordance with the body sheet metal standard.
- 8. Designed so that it has no sharp edges or projections that could cause hazard or injury to students.
- 9. Designed and equipped with a four-point mounting to the front bumper.
- 10. Designed so that the arm extends approximately 72 inches from the front bumper when in the extended position. The arm must be constructed of a yellow polycarbonate material or noncorrosive tubing painted yellow. Approximate dimensions of the arm must be 65 x 3 x 1 inches.
- 11. Designed and installed to extend simultaneously with the stop arms by means of the stop arm control and retract within 8t seconds of deactivation.
- 12. Equipped with a magnetic device or other assembly attached to the bumper at the end of the arm to provide a positive latch for the arm when not in use; this device must also reduce the tendency of the arm to rattle and vibrate when not in use.

#### **Stop Arm Signals:**

For all 47 capacity and larger buses, there must be installed on the left outside of the body two approved octagonal stop-signal arms, each equipped with two double-faced alternately flashing LED strobe lights for signaling a student stop. All buses of less than 47 capacity must be equipped with one stop arm. Bodies to be mounted on chassis with hydraulic brakes must be equipped with electrically actuated stop arm(s). Air-powered stop arms must be provided as standard equipment on all buses equipped with air brakes. The rear stop arm location on buses equipped with dual stop arms must be the left side of the bus, as close as practical to the left rear corner of the body. The light lenses of all stop arms must be RED. Air lines must not be readily accessible to students inside or outside the bus and must be made of copper, steel or nonmetallic materials meeting SAE Standard J848D Fittings must be brass. Stop signal arms must meet the applicable requirements of SAE J1133. For controls, see the requirements above under System Controls. Stop arms must retract within six seconds of deactivation. For color, see **LETTERING AND TRIM**.

#### **STEP WELL LIGHT:**

A step well light must illuminate the bus entrance and be adequately protected. The step well light must be activated automatically when the service door is opened and the clearance lights are on. The step well light must be LED. See **SERVICE DOOR** for further operational requirements.

#### **STROBE LIGHT:**

A required white flashing LED strobe lamp must be installed on the roof of a school bus at a location centered (laterally) and approximately 48 inches (longitudinally) from the rear edge of the rear roof cap. If the bus is equipped with a roof hatch or other roof-mounted equipment falling within the above-mentioned measurements, the strobe lamp may be located directly behind that equipment. The lamp shall have a single clear lens emitting light 360 degrees around its vertical axis, meeting the requirements of SAE J845. It may not extend above the roof more than the maximum legal vehicle height, as described in s. 316.515(2), F.S. A manual switch and a pilot lamp shall be included to indicate when the lamp is in operation.

#### **TURN SIGNAL LAMPS:**

Front turn signal lights must be amber LED lights (if available). Side turn signal lights must be amber LED lights on each side of the bus, mounted rearward of the service door on the right side and rearward of the front stop arm on the left side. All buses over 30 feet in length must have two amber LED turn signal lights mounted on each side of the bus. The rearmost side turn signals on buses over 30 feet long must be mounted at or rearward of the centerline of the rear axle. Rear turn signal lights must be plug-in LED lights that meet current SAE requirements and comply with FMVSS.

#### TWO-WAY RADIO:

Use of a two-way radio communications system approved by the school district is acceptable.

#### **VIDEO CAMERA MONITORING SYSTEMS:**

Districts may install video cameras in buses provided the installed system:

- 1. Is mounted securely in the bus;
- 2. Is outside the federal head impact zone (FMVSS No. 222);
- 3. Is located in an area not likely to cause student injury; and
- 4. Has no sharp edges or projections.

NOTE: This is the end of the **ELECTRICAL EQUIPMENT AND WIRING** section.

#### **EMERGENCY EXITS:**

- 1. The emergency door on all Types A, C, and front engine Type D buses must be located at the center of the rear of the bus and have a minimum horizontal opening of 24 inches and vertical opening of 48 inches.
- 2. The emergency door must be hinged on the right-hand side using hinge(s) with a brass or rust-resistant rod.
- 3. The outside control must consist of a nondetachable opening device designed to prevent "hitching to."
- 4. The emergency door must be equipped with a slide bar, cam-operated latching device having a minimum stroke of 1 inch.
- 5. The switch for the warning system must be enclosed in a metal case or durable case of other material, with rounded, protected edges. Wires leading from the switch must be concealed in the bus body. The switch must be installed so that the plunger contacts the farthest edge of the slide bar in such a manner that any movement of slide bar will immediately close the switch circuit and activate the buzzer.
- 6. The door latch must be equipped with an interior handle that extends approximately to the center of the emergency door. It must lift up to release.
- 7. There must also be attached to the door, in such a way that it is visible inside and outside the bus, labeling as follows: "This door is equipped with a hold-open device. To release, open the door to its fully opened position." This sticker must be red on a white background, and the lettering must be a minimum height of 1/2 inch.

Each non-lift bus must also be equipped with push-out type emergency exit side windows of similar design to the standard side windows, except for the following:

- 1. The emergency window assemblies must be hinged on the forward side.
- 2. No emergency window may be placed next to any child safety seat.
- 3. Emergency windows must be installed in the following quantity on non-lift buses:

a. 0 to 40 capacity

1 window per side

b. 41 to 72 capacity

2 windows per side

c. 73 to 90 capacity

3 windows per side

Buses 35 capacity and smaller must be equipped with one roof hatch emergency exit/ventilator. Buses over 35 capacity must be equipped with two roof hatch emergency exit/ventilators. Specifications for roof hatches must be as follows (also see <u>GENERAL INFORMATION AND WARRANTY PROVISIONS</u>):

1. Hinge(s) must be located on forward and rearward side of hatch.

2. The design must provide a "partially open" position along the full width of the hatch adequate to allow air to enter or exit and, thereby, ventilate the bus by opening either the front or rear of the hatch. The hatch must allow for partial opening on any of its four sides and on all four sides simultaneously.

Buses equipped with a lift are not required to be equipped with push-out emergency exit windows unless mandated by FMVSS No. 217. Lift buses may be equipped with push-out type emergency exit windows based on the capacity of a comparably sized non-lift bus.

#### **EMERGENCY ROADSIDE REFLECTORS:**

There must be three reflector warning devices, meeting the requirements of FMVSS No. 125, mounted in a location accessible to driver in the front section of the bus, and stored in a container. The container must be sealed with a breakable, non-reusable seal.

#### **FIRE EXTINGUISHER:**

A dry-chemical fire extinguisher with a gauge and designed to restrain tampering must be mounted in a place accessible to the driver, preferably near the service door.

The fire extinguisher must bear the label of Underwriters Laboratories, Inc., showing a rating of no less than 2A-10BC.

#### **FIRST-AID KIT:**

The bus must carry a Grade A, moisture- and dust-proof first-aid kit, mounted in such a manner that it can be easily detached and made portable, in an accessible place in the driver's compartment. The container must be sealed with a breakable, non-reusable seal, and the contents must be as follows:

1-inch bandage compress (e.g., Band-Aids) two packages 40-inch triangular bandage with two safety pins one package

4 x 4-inch sterile gauze pads
2-inch Kerlix rolled bandage
1-inch roll adhesive tape

two packages of six each
one roll, 6 yards in length
one roll, 2 1/2 yards in length

Eye dressing packet two packages

#### **FLOOR AND FLOOR COVERING:**

- 1. The floor must be level from front to back and from side to side except for the wheel housings, the toe board and the driver's seat platform.
- 2. All sills must be permanently attached to the floor.
- 3. The driver's compartment plate on conventional bodies must be removable, installed level with the bus floor. All components requiring servicing must be readily accessible. Openings in the bus floor to meet this requirement must be reinforced to maintain the full strength of the unpunctured floor.

**NOTE: Items 1-3 above do not apply to Type A Buses less than 14,500 GVWR.** For Type A buses less than 14,500 GVWR, the floor must provide adequate and firm support for seat legs and must have a minimum 1/2 inch marine grade or pressure-treated plywood, securely mounted to the floor. Basic floor construction of Type A buses must be the manufacturer's standard, meeting applicable FMVSS.

- 4. The floor covering must be resistant to ultraviolet light, ozone and moisture and have a minimum tensile strength of 1,200 pounds per square inch (PSI) and a minimum elongation of 100 percent. Floor covering must be abrasion-resistant and slip-resistant and have a minimum coefficient of friction of 0.85 as measured under American Society for Testing and Materials (ASTM) D1894 or 0.65 as measured under ASTM D2047.
- 5. The floor covering from the top step landing area to the emergency door (or rear seat on Type D rear engine buses) must be ribbed aisle, non-skid and wear-resistant, fire-resistant elastomer. Elastomer floor covering must meet Federal Specification ZZ-M-71d.

- 6. The landing area at the top of the steps must be ribbed elastomer, which must extend to the ribbed aisle floor cover. The leading horizontal edge, or nosing, must be white or yellow ribbed elastomer or other contrasting color and must have an integral 90 degree turn-down with a square leading edge matching the step treads.
- 7. All joints or seams in the floor covering must be covered with non-ferrous metal, minimum 1 inch wide, and the driver's compartment, except at the cowl, must have a special, approved molding. Alternate materials may be used if they provide equivalent durability. The molding must be securely attached to prevent a tripping hazard.
- 8. Manufacturers may use seamless one-piece floor rubber with an integral ribbed aisle meeting the requirements in items 4 and 5. Aisle molding is not required when the bus is equipped with one-piece floor rubber.
- 9. All holes in the chassis firewall and around the transmission cover and engine housing must be adequately sealed.
- 10. A commercially available truck bed liner material meeting the requirements in items 4 and 5 may be substituted for the required flooring material.

#### **FUEL FILLER OPENING:**

An opening of adequate size and design must be provided over fuel filler. Also see **LETTERING AND TRIM**.

#### **GRAB HANDLE AT ENTRANCE:**

A suitable grab handle or rail must be provided at the front entrance, securely mounted inside of the body. Grab handles must be made of round stainless steel, 1 inch outside diameter (OD). The grab handle and mounting must be designed to minimize the possibility of students' clothing or personal items becoming lodged or caught upon exiting the bus, in order to reduce the risk of injury or fatality to passengers from being dragged outside the bus.

#### **INSULATION AND SEALING OF JOINTS:**

The overlap of the edge of the exterior roof and side panels, and also the top edge of rub rails, must be sealed to prevent moisture, dust, and other contaminants from entering the joints and the bus.

#### **LETTERING AND TRIM:**

Trim on the three rub rails below the beltline and all lettering must be black (except for stop signs). Entrance door frames, pilaster panels and other trim panels may be painted black, if approved by the department. The letters of the words "SCHOOL BUS" on the top front and rear section of the bus body must be 8 inches high and correspond to the Series B, Standard Alphabet (see the National School Transportation Specifications and Procedures, Revised 2015). "(Name of District) DISTRICT SCHOOLS" on each side of the bus body at the beltline must be in 6-inch minimum letters. Private and charter schools may alternately affix the name of the school in the aforementioned format and location. Bus numbers must be a minimum of 6 inches in height and on each side and on the front bumper and rear of the bus body. "EMERGENCY DOOR" must be in 2-inch letters at the top or directly above the door, visible inside and outside of bus. Lettering to indicate the fuel type must be located on the body adjacent to the fuel filler opening using letters that are a minimum of 1 inch in height. The words "STOP WHEN RED LIGHTS FLASH" must be displayed on the back of all buses in 6-inch black letters. Also, see the lettering requirements for emergency exits, including roof hatches and push-out windows, under EMERGENCY EXITS.

The front stop signal arm (both sides of arm) and rear stop arm (rear side only) must have a red background with a reflectorized white border; the letters "STOP" must be in 6-inch white reflectorized letters. Both sides of the front stop arm and the rear stop arm must have reflectorized red sheeting of high-intensity material. The front side of the rear stop arm must be painted red.

**NOTE:** Buses must include the lettering and trim specified above, and are limited to lettering, trim, symbols, markings, and coloration specified in the <u>National School Transportation Specifications and Procedures, Revised</u> 2015.

#### LICENSE HOLDER:

A license holder must be included on the left rear outside of the body, with a suitable method for mounting the license tag.

#### **LOCKUP DEVICES:**

Any emergency door equipped with a locking device must have an ignition interlock that prevents starting the engine when the door is locked, meeting requirements of FMVSS No. 217. Emergency exit windows must not be operable (under normal conditions) from outside the bus and must not be equipped with any locking device.

#### **MIRROR SYSTEM:**

- 1. <u>Interior Mirror</u>: Must provide adequate viewing of the entire length and width of the interior of the bus and be at least 6 x 30 inches. The mirror must meet the following requirements:
  - a. Meet or exceed American National Standards Institutes (ANSI) Z97.1 requirements for safety glazing in mobile environments and be bonded to the mirror housing;
  - b. Include a heavy-duty, single-piece mounting bracket that ensures stability;
  - c. Housing must be low-gloss black;
  - d. Incorporate an adjustment to allow the driver to reposition the mirror without the use of tools; and
  - e. Have a soft gasket type frame that is bonded to the housing.

**NOTE:** Interior mirror on Type A buses must be a minimum of 50 square inches and meet the above requirements.

#### 2. Exterior Mirrors:

Each school bus must be equipped with a system of exterior mirrors complying with FMVSS No. 111 and meeting the following requirements:

- a. <u>Cross/Side-View Mirror System</u>: This mirror system must incorporate the following features and requirements:
  - i. Only one mirror is to be installed at each front corner of the bus.
  - ii. Mirrors must not reflect excessive glare from the bus headlights or the sun into the driver's eyes. Mirrors must be a 1/4 sphere or shaded 1/2 sphere design.
  - iii. Stainless steel or non-corrosive fasteners must be used in the construction of the mirror assembly and to hold the brackets to the body.
  - iv. Mirror stabilizer brackets on all Type C composite hoods must use through-the-fender rubber or nylon mounts with stainless steel caps to reduce mirror vibration and erosion of the hood material.
  - v. All exterior mirror fasteners, mounts and bracketry must be of non-corrosive material.
- b. **Rear Vision Mirror System:** A rear vision mirror system must be provided that incorporates the following features and requirements:
  - i. The system must consist of one flat and one convex mirror lens per side. Each mirror set must be mounted on a breakaway arm with a positive detent or lock.
  - ii. Each of the four required mirrors in the rear vision mirror system must be electrically operated and remotely controlled from the driver's location.
  - iii. All exterior mirror fasteners, mounts and bracketry must be stainless steel. Stainless steel or non-corrosive fasteners must be used in the construction of the mirror assembly and to hold the brackets to the body.
- c. Overall Exterior Mirror System: (cross/side-view and rear vision mirrors) must be isolated from vibration and be compliant with FMVSS No. 111.

#### **NOISE REDUCTION PACKAGE:**

A noise reduction package is required and must include full insulation of the ceiling, walls, and front and rear of the bus, including body bows and engine compartment, plus minimum 1/2-inch marine grade or pressure-treated plywood or equivalent composite material securely mounted to the floor. Insulation material must be fire-resistant and of a type that will not harbor dampness.

#### **PAINT AND FINISH:**

All National School Bus Yellow paint must meet the National School Transportation Specifications and Procedures, Revised 2015 for color and have a finished gloss rating of at least 85 at 60°F and a distinctness of image (DOI) rating of an average of at least 50, measured using the same method specified for gloss under GENERAL INFORMATION AND WARRANTY PROVISIONS. Paint must be applied for a total dry thickness of at least 1.8 mils over all painted surfaces. School bus roofs must be painted white in color, and must meet the gloss and DOI ratings. White paint may extend to the leading and trailing edge of the roof caps, and may extend down to the drip rails. Trim, lettering and bumpers must be black except that bumpers must be striped in accordance with National School Transportation Specifications and Procedures, Revised 2015 or these specifications. Also see GENERAL INFORMATION AND WARRANTY PROVISIONS for warranty requirements, LETTERING AND TRIM and REFLECTIVE MARKINGS.

#### **PANELING, INTERIOR:**

Interior panel fastenings must minimize vibrations and rumble. A cove molding, which may be an extension of the body panels, must be installed covering the wall-to-floor joint beginning at the windshield post on the left side of the bus and extending along the walls around the corners to the service door on the right side. Molding must be securely fastened so that dirt will not readily work under it. The interior paneled area immediately below the window line must be aluminum-coated steel.

#### **REFLECTIVE MARKING PACKAGE:**

There must be installed a reflective marking package as specified in the <u>National School Transportation Specifications</u> and <u>Procedures, Revised 2015</u>. Striping must be installed longitudinally along the length of the body at the vertical location immediately below the seat level rub rails, but high enough so as to clear wheel wells, whenever possible. Short breaks in the striping at rivet locations are acceptable. Reflective markings are also required for all emergency exits, as specified in FMVSS No. 217.

#### **RUB RAILS:**

- 1. There must be a rub rail on each side of the bus approximately at seat level, which must extend from the entrance door post around the bus body (except for emergency door) to the point of curvature near the cowl on the left side.
- 2. There must be rub rails located approximately at the floor line and the bottom of the outer skirt, which must cover the same longitudinal area as the upper rub rail, except at wheel housings, but extend only to the right and left corners.
- 3. Rub rails must be applied outside of body panels. Pressed-in or snap-in rub rails do not satisfy this requirement.

# SEATING, MODESTY PANELS (RESTRAINING BARRIERS), LAP BELTS, AND WEBBING CUTTERS:

- 1. Passenger seats must be mounted facing forward and provide a minimum of 12.8 inches of seat width per passenger seating position. The aisle must be 12 inches wide at a minimum. This plan of body seating must be used to determine seating capacity (see **BODY DATA PLATE**).
- 2. Seat spacing must meet the requirements of FMVSS No. 222. The first seat on each side of all Types A, C and D buses must be equipped with FMVSS No. 225-compliant child safety seat anchorage points. All 39-inch FMVSS No. 225-compliant passenger seats must be equipped with two sets of anchorage points per bench seat. All passenger seats compliant with FMVSS No. 225 with a seat width of less than 36 inches must be equipped with one set of anchorage points per bench seat.
- 3. All passenger seats compliant with FMVSS No. 225 must be spaced to provide the maximum knee room (seat spacing) permitted by FMVSS No. 222. The rest of the passenger seats must provide for a minimum of 24 inches of knee room.
- 4. Seat padding must be secured to the frame so that it will not snag. Screws and bolts used in seat back construction must not be exposed.
- 5. Restraining barriers and passenger seats, including the seat back and the entire bottom cushion (including underside), must be covered with blue vinyl-coated material. All passenger seat assemblies and barriers

must meet the requirements of the National School Transportation Specifications and Procedures, Revised 2015. Buses must have an FMVSS-compliant padded restraining barrier in front of the forward-most passenger seat on each side of the bus. Also see Section V for restraining barrier requirements for buses equipped with wheelchair lifts. Restraining barriers at the entrance side and the driver's side must have a full-width, aluminized steel panel below the padded section extending down to the floor, except as specified under heater/defroster specifications (see **ELECTRICAL EQUIPMENT AND WIRING**).

- 6. All Type A school buses sold through the State of Florida school bus bid must be equipped with Type II, three-point seat belts in all passenger seating positions. These belt systems must meet the requirements of National School Transportation Specifications and Procedures, Revised 2015.
- 7. All Types C and D buses must be equipped with lap belts in all passenger seating positions, meeting the following requirements:
  - a. All belts and anchorages must comply with FMVSS Nos. 209 and 210.
  - b. Belts must be manufacturer's standard style lap belts. The nonadjustable buckle end of each belt must be the aisle-side connection point on each passenger seat.
  - c. Each two-part belt must be separately color coded to aid in proper connection.
  - d. Any belt system with parts that can be manually disassembled without the use of tools and any system that is subject to easy vandalism shall not be approved for use in Florida school buses.
  - e. Retractable seat belts are permissible at the purchaser's option. If this system is specified, the retractors must be emergency locking type, and the retractors must be mounted below the seat bight. Seat bight is defined as the area close to and including the intersection of the surfaces of the vehicle seat cushion and the seat back.
  - f. All federal requirements supersede any of these requirements.
  - g. School districts may install restraining systems that differ from these requirements as necessary to accommodate pre-school age children and children with special needs. Such systems must comply with FMVSS Nos. 209, 210, and 213, as applicable, and must be approved by the body manufacturer.
- 8. All buses must also be equipped with a durable webbing cutter having a full width handgrip and a protected, replaceable blade. The required belt cutter must be mounted in a location accessible to the driver in the seated position and be easily detachable.

#### **SERVICE DOOR:**

- 1. The service door must be a split or jackknife type located at the right front of the bus. Doors must be securely hinged with approved heavy-duty hinges with a brass or rust-resistant rod adequately fastened to the adjoined member. Doors must have a 1-1/2 inch minimum safety gap sealed with a safety flap of approved quality. The door must extend to the bottom step and be fitted with suitable weather strip to keep water from entering the step well.
- 2. An air-operated entrance door must be provided on all buses equipped with air brakes. This system must have a manually operated override to enable the driver to manually open the door in the event of loss of power. Air-powered entrance doors must operate in accordance with the following table:

Ignition	Switch	Door	Switch	Emergency	 	Position /	~	Well L	ight	
Position				Switch Position	Status	1 obtaion 7		Condition		
Off		Any		On	Neutra	1	Off			
Off		Any		Off	Neutra	1	Off			
On		Closed		Off	Closed	Active	Off	-		
On		Opened		Off	Open//	Active	On			
On		Closed		On	Neutra	1	Off			
On		Opened		On	 Neutra	1	On	,		

- 3. When the key switch is in the "off" position, the air door system must not create a battery draw. All air-powered door systems must provide a rebuildable air cylinder and operate reliably in all weather and temperature conditions. All air-powered door systems must include a method of manually adjusting the opening and closing speed and force of the doors.
- 4. Hydraulic brake buses must have an electrically controlled entrance door.

- 5. The service door must have a minimum horizontal opening of 24 inches and a minimum vertical opening of 68 inches. Immediately above the door opening there must be secured to the body panel a high-density foam rubber pad, a minimum of 3 inches in width, or an equivalent approved safety cushion.
- 6. Doors must be designed and weather strips mounted so that there is no binding or tendency for stripping to dislodge during door operation. One or two glassed-in openings must be provided in each door half with glass of same grade as specified for side windows and mounted in rubber. The bottom of the lower glass panel must not be more than 30 inches from the ground when the bus is unloaded. The top of the upper glass panel must not be more than 6 inches from the top of the door.

#### SIZES OF BODIES:

The height of Types C and D bus bodies, from the top of the finished floor to the underside of the ceiling, at the center of the body, must be a minimum of 76 inches.

#### STEP WELL:

A step well of at least three steps must be built in the right front assembly, enclosed with doors extending to the bottom step. Each step must be covered with abrasion-resistant "Pebble-Top" elastomer, the base of which must be at least 3/16 inches thick, with an overall thickness of 5/16 inch, bonded to a durable polymer base and otherwise constructed to provide substantial support, including the leading horizontal edge, which must be "Pebble-Top" type, and white or a color that contrasts with the step tread by at least 70 percent. The polymer backing must have an integral 90-degree turndown with a square leading edge for slip resistance. The lower (first) step height must be between 10 and 16 inches above the ground for all Types A, C, and D buses. Each step must be the full width of the step well at the point where the step is located. Half steps or partial steps are not acceptable.

NOTE: Two steps are acceptable on Type A buses.

#### STRUCTURAL DESIGN and TESTING:

- 1. All Types A, C, and D bodies must meet the requirements of FMVSS No. 221 and the requirements of the National School Transportation Specifications and Procedures, Revised 2015 Side Intrusion Test.
- 2. Each manufacturer of Types A, C or D bodies must certify that representative configurations of its buses produced to meet these specifications comply with the testing and requirements of the Colorado Racking Load Test. See Colorado Racking Load Test in Appendix B.
- 3. Each manufacturer of Types A, C or D bodies must certify that representative configurations of its buses produced to meet these specifications comply with the testing and requirements of the Kentucky Pole Test. See **Kentucky Pole Test** in Appendix C.
- 4. All bus bodies must be constructed to be in square and level. There must be no more than 1 inch of difference from side to side at the front and rear of the bus body (not counting any chassis lean or twist). All bodies must be mounted such that all designed body contact points are in contact with the chassis frame. All bodies must be centered on the chassis within plus or minus 1/2 inch.

#### **SUN SHIELD:**

A dual sun shield system must be provided, consisting of two independently mounted sun shields. One must be mounted above the windshield and the other above the driver's window. Each visor must have a tinted Plexiglas sun shield, minimum 6 x 24 inches, and rounded bull-nosed perimeter edges.

**NOTE:** The manufacturer's standard sun visor is acceptable on Type A buses.

### **VANDAL BOX, SIDE MOUNTED**

There must be installed on all Types C and D buses an equipment compartment on the ceiling above the driver's side window, measuring approximately 1,600 cubic inches. The compartment must have a door with a positive latch and a keyed-alike lock. No safety equipment shall be mounted inside this compartment.

#### **WINDOWS:**

- 1. All Types A, C, and D buses must have tinted glass that provides the maximum tinting allowed by federal and American National Standards Institute (ANSI) standards for the windshield, the driver's side window(s) and the service door glass. Tinted glass in all windows rear of the driver's compartment must have a light transmission of approximately 28 percent.
- 2. An adjustable split sash window with safety glass must be mounted in the side of the bus body between each framing post. Permanent marks showing the grade of glass must be visible.
- 3. Movable windows must be controlled by an approved lock having a finger-touch opener, providing for ease of operation and with no sharp projections. Window latches must be replaceable or rebuildable without disassembling the complete window frame or removing the window from the body. In addition, individual window latches or repair parts must be available and part numbers included in the required body parts catalog. Window seals and visors or drip molding must be installed and provide ample protection from leakage.
- 4. For ventilation, the driver's window must be adjustable and equipped with a positive latch that can be secured from the inside of bus.
- 5. The rear door must have two windows, one upper and one lower, installed in a waterproof manner.
- 6. Rear side windows located at each side of the emergency door must be installed in a waterproof manner. The glass area must be large enough to provide desirable vision to the rear and must be of the same quality and grade as side windows.

#### **WINDSHIELD:**

The front body section in the area of the windshield must provide for corner vision. Glass must be laminated safety polished plate with dark tint at top, installed in a waterproof manner and slanted to reduce glare. Glass must meet current SAE specifications and FMVSS. Light tint may be used in all Type D buses in lieu of dark tint at the top.

#### **WINDSHIELD STEPS AND HANDLES:**

A step and appropriate grab handle must be installed on each front corner of the body to facilitate cleaning the windshield. The handle must be stainless steel, chrome plated or non-ferrous metal, or may be made of non-metallic material of sufficient structural and mounting strength and resistant to weathering and deterioration, and must provide for secure mounting and adequate hand hold.

NOTE: Steps and handles are not required on Type A buses under 21,500 GVWR.

#### **WINDSHIELD WIPERS AND WASHERS:**

- 1. Electric windshield wipers must be standard on all buses. All wipers by design and installation must provide desirable vision for drivers. Blades and arms must be of sufficient length to clear the windshield glass in the driver's direct view. One switch must control both wipers, and the switch must be located within easy reach from driver's seat, preferably on the turn signal stalk. The system must incorporate a variable delay wipe feature to allow drivers to adjust the speed and frequency of the wipers. The wiper system must be designed to move the blades away from the driver's direct view when in the parked position.
- 2. Windshield washers must be electrically operated. The washer reservoir must be made of hard plastic or other approved material and have a capacity of at least 1/2 gallon. Flexible plastic bags are not acceptable.

**NOTE:** The manufacturer's standard windshield wipers are acceptable on Type A buses.

# SCHOOL BUS BODY EXCEPTIONS

#### **TYPE D FRONT ENGINE BODY EXCEPTIONS:**

- 1. The distance between the restraining barrier at the rear of the entrance step well and the engine cover must be a minimum of 13 inches.
- 2. A step, in lieu of stirrup steps, is permitted in or on the front bumper on both sides.
- 3. The engine cover must provide an adequate seal to the bus floor area to keep engine fumes from entering the passenger compartment and must be insulated to retard transfer of heat and engine noise. The engine cover must be hinged and equipped with a prop rod or other device so that it can be held securely in the fully open position to allow access to the engine.

### **TYPE D REAR ENGINE BODY EXCEPTIONS:**

- 1. The engine compartment must be constructed to permit servicing of the engine, having one or two doors opening at the rear and louvered, with removable panels on each side of engine compartment. The engine compartment must be sealed at top and front to retard heat transfer and prevent engine fumes from entering the passenger compartment. Provisions must be made for easy removal of the engine through the rear compartment.
- 2. Mud flaps must be installed at the rear of the dual wheels.
- 3. A step, in lieu of stirrup steps, is permitted in or on the front bumper on both sides.
- 4. Type D Rear Engine buses are exempted from the requirement for an additional electrical compartment for air conditioner circuitry, provided the air conditioner control boards are installed in the rear package shelf area in a covered box.
- 5. There must be an engine access panel underneath the rear seat of all rear engine buses designed to provide access to the engine.

# OPTIONAL BODY EQUIPMENT SPECIFICATIONS

# **AUTOMATIC VEHICLE LOCATION AND STUDENT TRACKING SYSTEM:**

There shall be an approved option for a system that uses the Global Positioning System (GPS) to determine and wirelessly report the location of the bus in approximately real time. The system may also include an additional feature that will identify individual students as they board or disembark from the bus and report the locations and times.

#### **AUXILIARY DRIVER FAN:**

There shall be an approved option for a 6-inch or header-mounted squirrel cage fan to be installed and mounted to the left side of the windshield, when possible, in a location approved by the department.

#### **BAGGAGE COMPARTMENTS:**

There shall be an approved option for baggage compartments on all bodies when available. This body option must include a lock and be keyed alike with any other body option requiring use of a key.

#### **BATTERY DISCONNECT SWITCH LABELING:**

There shall be an approved option for a label to be placed on the exterior of the bus on the cover of the compartment housing the battery disconnect switch. The label background must be white with red 1-inch letters with the wording "MAIN BATTERY DISCONNECT."

#### **BUS LOCKUP SYSTEM:**

There shall be an approved option whereby a bus can be locked at the emergency door as well as the entrance door. An ignition interlock is required for the emergency door to prevent starting the bus if the emergency door or rear window (on RE units) is locked. This body option must be keyed alike with any other body option requiring use of a key.

#### **CEILING PANELS:**

There shall be an option for full-width perforated interior ceiling panels extending from the rear header panel forward to at least the front of the engine compartment.

# **DRIVER'S SEAT WITH INTEGRATED SEAT BELT:**

There shall be an approved option for a driver's seat with a seat belt integrated into the seat back, meeting the requirements of DRIVER'S SEAT AND SEAT BELT in this section.

#### **EXTERIOR LIGHT MONITOR:**

A system of monitoring exterior lights on the front and rear of the bus from the driver's seated position is approved as an option. Such systems must include:

- 1. Student warning lamps, both RED and AMBER, front and rear;
- 2. Tail lamps:
- 3. Backup lamps;
- 4. Rear turn signal lamps; and
- 5. Stop lamps.

A system that monitors only electrical circuits and does not indicate whether the bulb is operational is not acceptable.

#### **FUEL / DEF DOOR:**

A lock with two keys may be installed in the fuel/DEF supply service doors of the body skirt. This body option must be keyed alike with any other body option requiring use of a key. Fuel/DEF Doors may be color-coded to reflect fuel type.

#### **INFANT SEATING:**

There shall be an approved option for passenger seating designed to safely transport newborns, infants or toddlers, meeting all applicable FMVSS. Such seats may include C.E. White Child Restraint Seats and other systems, as approved by the department.

### **INTERIOR OVERHEAD STORAGE COMPARTMENTS (MFSAB ONLY):**

There shall be an approved option for interior overhead storage compartments that meet the following criteria:

- 1. Head protection requirements of FMVSS No. 222, School Bus Passenger Seating and Crash Protection, where applicable;
- 2. Be completely enclosed and equipped with latching door (both door and latch sufficient to withstand a pushing force of 50 pounds applied at the inside center of the door);
- 3. Have all corners and edges rounded, with a minimum radius of 1 inch, or be padded equivalent to door header padding;
- 4. Be attached to the bus sufficiently to withstand a force equal to 20 times the maximum rated capacity of the compartment; and
- 5. Have no protrusions greater than 1/4-inch.

The driver's area forward of the foremost padded barriers will permit the mounting of required safety equipment and vehicle operation equipment.

#### **LETTERING:**

Districts may add an American flag decal to the exterior of the bus. If used, it must be no more than 6 x 10 inches in size and located in front of the district name on the beltline of the bus. Also see United States Public Law 4 U.S.C. § 7. Districts may add one employee recruitment sign and/or "No Right Turn on Red" sign no larger than 6" x 12" on the back of the bus between the beltline and the rear bumper, provided it does not obstruct any other required signage or windows.

#### **POWDER-COATED WINDOW FRAMES:**

There shall be an approved option for electrostatically powder-coated black window frames on all types of buses to reduce friction and improve ease of operation of passenger side windows.

### **PUBLIC ADDRESS SYSTEM (P.A.), RADIO:**

There shall be an approved option for a public address system/AM/FM stereo radio with four speakers inside the bus and one heavy-duty weatherproof P.A. speaker outside the bus. This option must have controls to permit the driver to select inside or outside speakers, and the radio must be mounted in the driver's compartment so that all controls are readily accessible to the driver from the normal seated position. Interior speakers must be flush-mounted. Outside speaker must be mounted under the hood or in another protected location at the front of the bus. An AM/FM stereo radio with four speakers may be offered separately. No internal speakers other than those used for the driver's communication system may be installed within 4 feet of the back of the driver's seat when the seat is in its rearmost upright position.

#### **REAR HEATER:**

There shall be an approved option for an additional heater mounted to provide heat in the rear of the body. This option must be installed under a passenger seat or otherwise be protected to eliminate damage to the unit and injury to the students.

### **RED LIGHT ABOVE EMERGENCY DOOR:**

There shall be an approved option for a small red light to be mounted above the emergency door on the interior of the bus that is activated when the clearance lights are on.

THREE-POINT SEAT BELTS AND THREE-POINT SEAT BELT SEATS:
There shall be an approved option for three-point seat belts in two- and three-passenger seats, as approved by the department.

# **SECTION IV**

# POWER LIFT EQUIPPED SCHOOL BUS MINIMUM SPECIFICATIONS

#### INTRODUCTION AND GENERAL REQUIREMENTS FOR EXCEPTIONAL CHILD BUSES:

Exceptional child bus body structure and equipment must conform to the regular bus body specifications in Section III and meet the additional requirements of this section. All school buses equipped with wheelchair lifts must meet or exceed the requirements of FMVSS Nos. 403 and 404, the National School Transportation Specifications and Procedures, Revised 2015, and all requirements listed herein, which prevail in the event of a conflict.

#### **DEFINITION:**

An exceptional child bus is any school bus that is designed, equipped and/or modified to accommodate students with special transportation needs requiring a power lift.

#### **GENERAL REQUIREMENTS:**

Exceptional child specially equipped school buses shall comply with the <u>National School Transportation Specifications and Procedures, Revised 2015</u> and with the FMVSS applicable to their GVWR category. Any school bus to be used for the transportation of children who use a wheelchair or other mobile positioning device, or who require life-support equipment that prohibits use of the regular service entrance, shall be equipped with a power lift.

#### **AISLES:**

All school buses equipped with a power lift shall provide a minimum 30-inch pathway leading from any wheelchair position to at least one 30-inch wide emergency exit door. A wheelchair securement position shall never be located directly in front of (blocking) a power lift door location.

#### **GLAZING:**

Tinted glazing may be installed in all doors, windows and windshields consistent with federal, state and local regulations.

#### **IDENTIFICATION:**

Exceptional child specially equipped school buses shall display the International Symbol of Accessibility below the window line pursuant to appendices A-1 and A-2. Such emblems shall be white on blue background, shall not exceed 12 inches square in size and shall be of a high-intensity retroreflective material.

#### **OCCUPANT RESTRAINT SYSTEM:**

If the upper torso belt anchorage is higher than 44 inches measured from the vehicle floor, an adjustment device, as part of the occupant restraint system, shall be supplied (See FMVSS No. 222, S5.4.3 and S5.4.4.).

### **PASSENGER CAPACITY RATING:**

In determining the capacity of a school bus for purposes other than actual passenger load (e.g., vehicle classification or various billing/reimbursement models), any location in a school bus intended for securement of a wheelchair during vehicle operation shall be regarded as four designated seating positions, and each lift area shall count as four designated seating positions.

#### **POWER LIFTS:**

- 1. The power lift shall be located on the right side of the bus body only.
- 2. Vehicle lifts and installations shall comply with the requirements set forth in:
  - a. FMVSS No. 403, Platform Lift Systems for Motor Vehicles; and
  - b. FMVSS No. 404, Platform Lift Installations in Motor Vehicles.
- 3. Design loads: The design load of the lift shall be at least 800 pounds. Working parts, such as cables, pulleys and shafts, which can be expected to wear, and upon which the lift depends for support of the load, shall have

- a safety factor of at least 6, based on the ultimate strength of the material. Non-working parts, such as platform, frame and attachment hardware that would not be expected to wear, shall have a safety factor of at least 3, based on the ultimate strength of the material.
- 4. Lift capacity: The lifting mechanism and platform shall be capable of operating effectively with a wheelchair and occupant mass of at least 800 pounds.
- 5. Documentation: The following information shall be provided with each vehicle equipped with a lift:
- 6. A phone number where information can be obtained about installation, repair and parts. (Detailed written instructions and a parts list shall be available upon request.)
- 7. Detailed instructions regarding use of the lift shall be readily visible when the lift door is open, including a diagram showing the proper placement and positioning of wheelchair/mobility aids on the lift.
- 8. Training materials: The lift manufacturer shall make training materials available to ensure the proper use and maintenance of the lift. These may include instructional videos, classroom curriculum, system test results or other related materials.
- 9. Identification and certification: Each lift shall be permanently and legibly marked or shall incorporate a non-removable label or tag that states it conforms to all applicable requirements of the current National School Transportation Specifications and Procedures. In addition, and upon request of the original titled purchaser, the lift manufacturer or an authorized representative shall provide a notarized Certificate of Conformance, either original or photocopied, which states that the lift system meets all the applicable requirements of the current National School Transportation Specifications and Procedures.

#### **REGULAR SERVICE ENTRANCE:**

- 1. On power lift-equipped vehicles, steps shall be the full width of the step well, excluding the thickness of the doors in the open position.
- 2. In addition to the handrail required in section III, an additional handrail is required on all specially equipped school buses. This handrail shall be located on the opposite side of the entrance door from the handrail required in section III and shall meet the same requirements for handrails.

#### **RESTRAINING BARRIERS WITH MODESTY PANELS:**

- 1. There must be a padded restraining barrier with a modesty panel located immediately rearward of the lift if there are wheelchair spaces or regular seating located rearward of the lift and on the same side of the bus.
- 2. There must be a padded restraining barrier with a modesty panel meeting FMVSS spacing requirements located forward of all passenger seats that do not have another seat properly spaced in front of them.
- 3. There must be a padded restraining barrier or seat in front of any wheelchair position unless it is contiguous with and behind another wheelchair position.
- 4. The forwardmost restraining barrier on both sides of the bus must have a full width aluminized modesty panel extending to the floor. If the right front of the passenger area immediately behind the stepwell is not equipped with a restraining barrier due to placement of the wheelchair lift in that location, it must be equipped with a padded stanchion from floor to ceiling with an aluminized modesty panel.

#### **RESTRAINING DEVICES:**

- 1. On power lift-equipped school buses with a GVWR of 10,000 pounds or more, seat frames may be equipped with attachment points to which belt assemblies can be attached for use with child safety restraint systems (CSRSs) that comply with <u>FMVSS No. 213</u>, Child Restraint Systems.
- 2. Any belt assembly anchorage shall comply with FMVSS No. 210, Seat Belt Assembly Anchorages.
- 3. Alternatively, a child restraint anchorage system that complies with <u>FMVSS No. 225</u>, Child Restraint Anchorage Systems, may be installed.
- 4. Seat belt assemblies shall conform to FMVSS No. 209, Seat Belt Assemblies.
- 5. Child safety restraint systems, which are used to facilitate the transportation of children who in other modes of transportation would be required to use a child, infant or booster seat, shall conform to FMVSS No. 213.

#### **SEATING ARRANGEMENTS:**

1. Flexibility in seat spacing to accommodate special devices shall be permitted to meet passenger requirements.

2. All seating shall meet the requirements of <u>FMVSS No. 222</u>, School Bus Passenger Seating and Crash Protection.

# <u>SECUREMENT AND RESTRAINT SYSTEM FOR WHEELCHAIRS AND WHEELCHAIR-SEATED OCCUPANTS:</u>

- 1. For purposes of understanding the various aspects and components of this section, the terms "securement," "tie down," "securement system," and "tie down system" are used exclusively in reference to the devices that anchor the wheelchair to the vehicle.
- 2. The terms "restraint" and "restraint system" are used exclusively in reference to the equipment that is intended to limit the movement of the wheelchair occupant in a crash or sudden maneuver.
- 3. The term "wheelchair tie down and occupant restraint system (WTORS)" is used to refer to the total system that secures the wheelchair and restrains the wheelchair occupant.

#### **SPECIAL LIGHT:**

Doorways in which lifts are installed shall be equipped with an LED light that provides a minimum of 20 lumens of illumination on the floor of the bus immediately adjacent to the lift during lift operation.

#### **SPECIAL SERVICE ENTRANCE:**

- 1. Power lift-equipped bodies shall have a special service entrance to accommodate the power lift.
- 2. The special service entrance and door shall be located on the right side of the bus and shall be designed so as not to obstruct the regular service entrance.
- 3. The opening may extend below the floor through the bottom of the body skirt.
- 4. If such an opening is used, reinforcements shall be installed at the front and rear of the floor opening to support the floor and give the same strength as other floor openings. A drip molding shall be installed above the special service entrance to effectively divert water from the entrance.
- 5. Door posts and headers at the special service entrance shall be reinforced sufficiently to provide support and strength equivalent to the areas of the side of the bus not used for the special service entrance.

# **SPECIAL SERVICE ENTRANCE DOORS:**

- 1. A single door or double doors may be used for the special service entrance.
- 2. A single door shall be hinged to the forward side of the entrance unless this would obstruct the regular service entrance. If the door is hinged to the rearward side of the doorway, the door shall use a safety mechanism that will prevent it from swinging open should the primary door latch fail. If double doors are used, the system shall be designed to prevent the door(s) from being blown open by the aerodynamic forces created by the forward motion of the bus, and/or shall incorporate a safety mechanism to provide secondary protection should the primary latching mechanism(s) fail.
- 3. All doors shall have positive fastening devices to hold them in the "open" position when the special service entrance is in use.
- 4. All doors shall be weather-sealed.
- 5. When manually operated dual doors are provided, the rear door shall have at least a one-point fastening device to the header. The forward-mounted door shall have at least three one-point fastening devices—to the header, to the floor line of the body, and into the rear door. The door and hinge mechanism shall have strength that is greater than, or equivalent to, the strength of the emergency exit door.
- 6. Door materials, panels and structural components shall have strength equivalent to the conventional service and emergency doors. Color, rub rail extensions, lettering and other exterior features shall match adjacent sections of the body.
- 7. Each door shall have windows set in a waterproof manner that are visually similar in size and location to adjacent non-door windows. Glazing shall be of the same type and tinting (if applicable) as standard fixed glass in other body locations.
- 8. Door(s) shall be equipped with a device that will actuate an audible or visible signal located in the driver's compartment when the door(s) is not securely closed and the ignition is in the "on" position.
- 9. A switch shall be installed so that the lift mechanism will not operate when the lift platform door(s) is closed.

- 10. Special service entrance doors shall be equipped with padding at the top edge of the door opening. The padding shall be at least 3-inches wide and 1-inch thick and shall extend the full width of the door opening.
- 11. Power lift LED landing light is required on the exterior of the bus to provide illumination for lift operation.

#### SUPPORT EQUIPMENT AND ACCESSORIES:

- 1. In addition to the webbing cutter required in section III, each power-lift-equipped bus that is set up to accommodate wheelchairs with webbing attached shall contain an additional webbing cutter properly secured in a location to be determined by the purchaser. The webbing cutter shall meet the requirements listed in section III.
- 2. Special equipment or supplies that are used in the bus for mobility assistance, health support or safety shall meet local, federal and engineering standards that may apply, including requirements for proper identification. Equipment that may be used for these purposes includes, but is not limited to:
  - a. Wheelchairs and other mobile seating devices. (See subsection on Securement and Restraint System for Wheelchairs and Wheelchair-seated Occupants.)
  - b. Crutches, walkers, canes and other ambulating devices to assist ambulation.
  - c. Medical support equipment. This may include respiratory devices, such as oxygen bottles (which should be no larger than 38 cubic feet for compressed gas) or ventilators. Tanks and valves should be located and positioned to protect them from direct sunlight, bus heater vents or other heat sources. Other equipment may include intravenous and fluid drainage apparatus.
- 3. Each exceptional child bus that is set up to accommodate wheelchairs or other assistive restraint devices should be equipped with an emergency evacuation device that is certified and tested to withstand at least a 300-pound load when used as an emergency stretcher or drag. This evacuation device shall be properly secured to the bus in a location to be determined by the purchaser.
- 4. If transporting oxygen, refer to AMD Standard 003 available online at <a href="http://www.safeambulances.org/wp-content/uploads/2018/04/2014-AMD-Standards-001-027.pdf">http://www.safeambulances.org/wp-content/uploads/2018/04/2014-AMD-Standards-001-027.pdf</a> for oxygen tank retention requirements.

# WHEELCHAIR TIE DOWNS OCCUPANT RESTRAINT SYSTEMS (WTORS) GENERAL REQUIREMENTS:

- A WTORS installed in specially equipped school buses shall be designed, installed and operated for use with forward-facing wheelchair-seated passengers and shall comply with all applicable requirements of <u>FMVSS</u> <u>No. 222</u>, School Bus Passenger Seating and Crash Protection, and <u>SAE J2249</u>, WTORS for Use in Motor Vehicles.
- 2. The WTORS, including the anchorage track, floor plates, pockets, or other anchorages, shall be provided by the same manufacturer or shall be certified to be compatible by manufacturers of all equipment/systems used.
- 3. Wheelchair securement positions shall be located such that wheelchairs and their occupants do not block access to the lift door.
- 4. A device for storage of the WTORS shall be provided. When the system is not in use, the storage device shall allow for clean storage of the system, keep the system securely contained within the passenger compartment, provide reasonable protection from vandalism and enable the system to be readily accessed for use.
- 5. The WTORS, including the storage device, shall meet the flammability standards established in <u>FMVSS No.</u> 302, Flammability of Interior Materials.
- 6. The following information shall be provided with each vehicle equipped with a securement and restraint system:
  - a. A phone number where information can be obtained about installation, repair and parts. (Detailed written instructions and a parts list shall be available upon request.)
  - b. Detailed instructions regarding use, including a diagram showing the proper placement of the wheelchair/mobility aids and positioning of securement devices and occupant restraints, including correct belt angles.
- 7. The WTORS manufacturer shall make training materials available to ensure the proper use and maintenance of the WTORS. These may include instructional videos, classroom curriculum, system test results or other related materials.

#### WHEELCHAIR SECUREMENT/TIE DOWN:

- 1. Each wheelchair position in an exceptional child bus shall have a minimum clear floor area of 30 inches laterally by 48 inches longitudinally pursuant to FMVSS No. 222, S5.4.1 and S5.4.2.
- 2. Additional floor area may be required for some wheelchairs. Consultation between the user and the manufacturer is recommended to ensure that adequate area is provided.

# POWER LIFT EQUIPPED SCHOOL BUS OPTIONAL EQUIPMENT SPECIFICATIONS

#### **STRAIGHT FLOOR / FLAT FLOOR:**

- 1. There shall be an approved option on any size bus, when available, for an unobstructed straight floor design (i.e., no wheel wells and no step-up at the rear of the driver's compartment). Minimum headroom of Types C and D buses equipped with this option must remain 76 inches as per standard body specifications.
- 2. There shall be an approved option on any size bus, when available, for an unobstructed flat floor design in the passenger compartment. If this option uses a raised floor that is stepped up behind the driver's area, the forward edge of the aisle must have a white stripe labeled "Step Up" as viewed upon entering the aisle, and a "Step Down" label must be visible upon exiting the aisle.
- 3. Minimum headroom of Types C and D buses equipped with this option must remain 76 inches as per standard body specifications.
- The bus must be equipped with 39-inch seats except for locations where lift bus specifications require a 30inch aisle.

#### **TRACK SEATING:**

- 1. There shall be an approved option for a track-mounted seating system using button track (L track) and a wheelchair securement system meeting Florida specifications that mounts into the track-seating track.
- 2. The overhead track for the shoulder harness attachment must be present at every possible wheelchair position.
- 3. The bus must be equipped with 39-inch seats, except when lift bus specifications require a 30-inch aisle.
- 4. All floor tracking must be anodized aluminum or other material of equal strength that will resist corrosion in Florida's environment.
- 5. This option must include additional options, as follows:
  - a. Purchase of individual track seating seats;
  - b. Delete a seat, add a wheelchair position with wheelchair tie-downs; and
  - c. Delete a wheelchair position (tie-downs) and add a standard seat.

[Page Intentionally Blank]

# **SECTION V**

### AIR CONDITIONER SPECIFICATIONS

#### **PERFORMANCE SPECIFICATIONS:**

The installed air conditioner system must meet the high performance standards described in <u>National School Transportation Specifications and Procedures, Revised 2015</u>. Performance test reports shall be made available upon request by the purchasing district or the department.

#### **SYSTEM REQUIREMENTS FOR ALL BUSES:**

#### **Evaporators and Ducting:**

- 1. Air intake for any evaporator assembly(ies), except for the front evaporator of Type A buses, must be equipped with replaceable air filter(s) accessible without disassembly of evaporator case.
- 2. No portion of the air conditioner system may block the driver's view through any window, except that vertical covering in the rear corners of the bus interior for hoses and/or wiring may intrude on the rear quarter window by no more than 2 inches.

#### **Controls, Wiring, Hoses, and Miscellaneous Hardware:**

All system operating controls, including on-off switches, blower switches and thermostat controls, must be accessible to the driver in a seated position.

#### Body:

- 1. All Type C and Type D front-engine buses equipped with air conditioners must also be equipped with a compartment mounted next to the battery box with external access for mounting circuit breakers and control circuitry for the air conditioner.
- 2. Type D rear-engine buses are exempt from the requirement for an additional electrical compartment for air conditioner circuitry provided the air conditioner control boards are installed in the rear package shelf area in a covered box.

**NOTE:** Control boards may optionally be mounted inside the bus within the evaporator case or behind the dash on all Type C and D buses. Any control boards mounted inside the bus must be easily accessible.

#### Warranty and Serviceability:

Warranty - Air conditioner compressor applications must be approved in writing by the chassis engine manufacturer and state that the installation will not void or reduce the engine manufacturer's warranty or extended service coverage liabilities in any way. Also see <u>GENERAL INFORMATION AND WARRANTY PROVISIONS</u>.

#### Serviceability:

All components requiring periodic servicing must be readily accessible for servicing including, but not limited to:

- 1. Refrigerant service ports;
- 2. Sight glasses, which must be directly visible;
- 3. Any manually resettable circuit breakers;
- 4. Evaporator air filters removable and serviceable; and
- 5. All major component serial numbers must be readily visible.

#### **Parts and Service Manuals:**

A comprehensive operator's, maintenance and parts manual(s) must be provided for the entire system, or available via Internet access from the manufacturer's website for each A/C system purchased. Parts manuals must be designed so that all replaceable parts are illustrated by line drawings and numbered on the illustration, with a part description on a separate list under the corresponding part number. Part descriptions should be annotated appropriately with the part number, a proper description (part name) and the quantity required for the application listed in the drawings. The service manual or manufacturer's website must also include an overall A/C system diagram with component plumbing, locations and identities indicated for diagnostic purposes.


#### Parts and Tools Availability:

- 1. All system parts and required special service tools must be readily available, and a list of suppliers must be provided to each school district shop purchasing that brand of air conditioner.
- 2. Suspension Capacity and Ground Clearance Ground clearance at the lowest point of the air-conditioning system must be no less than the ground clearance of the bus at the step well.
- Air conditioner system manufacturers must provide information and data, as needed, to assist in establishing
  chassis engine performance requirements and in determining chassis electrical components or specifications
  that may be needed to accommodate the additional electrical demands imposed by the air-conditioning
  system.

[Page Intentionally Blank]


### **APPENDIX A**

#### MINIMUM LETTERING AND LIGHTING REQUIREMENTS

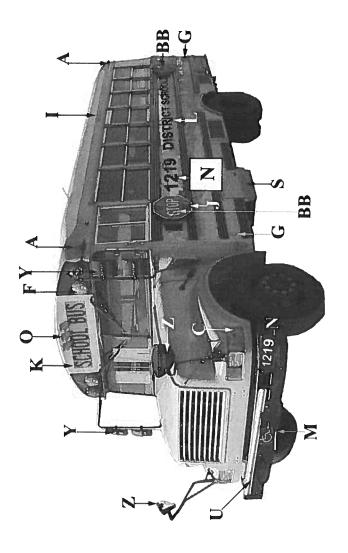

# MINIMUM LETTERING AND LIGHTING REQUIREMENTS:

A	LED Clearance Lights	1	(Name of District) District Schools. Each Side.
			Belt Line, 6-inch lettering
BB	Octagonal Stop Arm	M	Universal Handicapped Symbol,
			Wheelchair Lift Equipped Bus symbol can be placed
			anywhere on the front bumper, the size must be 6 by 6
			inches minimum.
C	LED Front Turn Signals, (amber lenses)	z	Bus Numbers, 6-inch lettering
Щ	LED Pupil Warning Lights, Side by Side Amber and Red,	0	LED Identification Lamps
	Flat Back Design		-
G	Reflectors	S	Battery Disconnect Switch Decal (optional)
-	Emergency Exit, 2-inch lettering	n	Pupil Crossing Arm
ה	Double-Faced Flashing Red LED Lights	Υ	Rear View Mirror System
7	SCHOOL BUS, Front and Rear, 8-inch	Z	Cross/Side View Mirror System
	lettering on retro-reflective yellow background		•

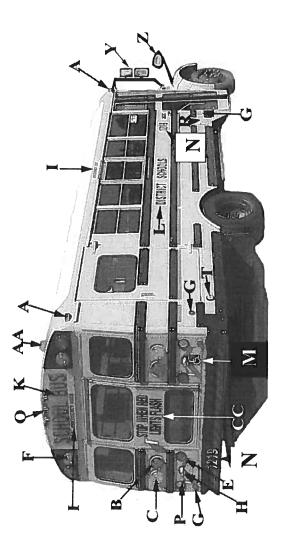

# MINIMUM LETTERING AND LIGHTING REQUIREMENTS:

A	LED Clearance Lights	Z	Bus Numbers 6-inch lettering
В	Seven-inch LED Brake/Tail Liohts	≥	Universal Handicanned Symbol
ı		4	Wheelchair Lift Equipped Buses, minimum 6 by 6
			inches
C	Seven-inch LED Turn Signals (amber lenses)	0	LED Identification Lamps
E	Four-inch LED Stop/Tail Lights	P	LED Back-up Lights
Ħ.	LED Pupil Warning Lights, Side-by-side Amber	R	Fuel Door, 1-inch letters, DEF Door
	ally Ivea, I lat Daen Lyesigii		
G	Reflectors	Т	Wheelchair Lift LED Landing Light
Н	LED License Plate Lamp	Ā	Rear View Mirror System
I	Emergency Exit Signs, 2-inch lettering	Z	Cross/Side View Mirror System
¥	SCHOOL BUS, Front and Rear, 8-inch	AA	Roof-mounted White Flashing LED Strobe Light
	lettering on retro-reflective yellow background		
r	(Name of District) District Schools (each side,	သ	Rear Door Lettering, 6-inch lettering
	belt line), 6-inch letters		ò

[Page Intentionally Blank]

# APPENDIX B COLORADO RACKING LOAD TEST

#### COLORADO RACKING LOAD TEST

The Colorado Racking Test shall be required on or before the acceptance date of the first bus of the respective configuration.

#### **TEST PROCEDURE:**

In addition to complying with the test procedures described in FMVSS No. 220, the body manufacturers shall record and report the downward vertical movement of the force at 0, 25, 50, 75, and 100 percent of the maximum force (both loading and unloading). The expected force deflection curve is illustrated schematically in Figure 1a. Low load nonlinearities may indicate joint deformation; high load nonlinearities may indicate yielding in structural members.

A second load cycle shall be performed following the procedure given in the first paragraph. The expected force-deflection curve is illustrated schematically in Figure 1b. Any hysteresis following the initial shakedown will be revealed by this second cycle.

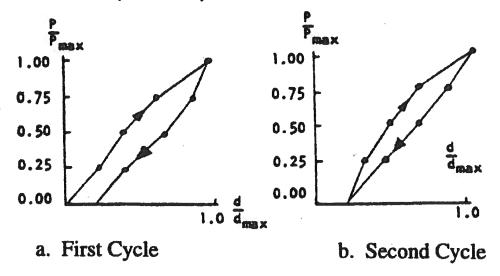


Figure 1. Static Load Test Load-Deflection Curves

A diagonal (racking) load test must be performed on Types A, B, C, and D school buses to ensure adequate shear stiffness and strength of the bus body. Details of the test are provided below:

A two-cycle loading sequence shall be conducted following the described procedure.

(a) Requirements: When a force equal to 1 1/2 times the gross vehicle weight (GVW) is applied to the edge of the roof of the vehicle's body structure through a force application plate, as specified in Test Procedures (b):

1. The diagonal movement of the force at any point on the application plate shall not exceed 5 1/8 inches; and

2. Each emergency exit of the vehicle provided in accordance with FMVSS No. 217 shall be capable of operation as specified in that standard during the full application of the force and after release of the force.

(b) Test Procedures: Each vehicle shall be capable of meeting the requirements of (1) and (2) when tested in accordance with the procedures set forth below.

- 1. The vehicle shall be supported on a rigid surface along the lower edge of the frame or along the body sills in the absence of a frame.
- 2. The load shall be applied through a force application plate that is flat and rigid. The dimensions of the plate shall be chosen to assure that the plate edges never make contact with the vehicle skin during testing. A typical width is 18 inches, and a typical length is 20 inches less than the length of the vehicle's roof measured along its longitudinal centerline.
- 3. Place the force application plate in contact with the edge of the vehicle roof. Orient the plate so that its flat, rigid surface is perpendicular to a diagonal line connecting the most distant points on an interior cross-section of the vehicle. The rear edge of the plate shall be positioned approximately 20 inches from the rear edge of the vehicle roof. A temporary stand may be used to support the plate until a force is applied.
- 4. Apply an evenly distributed force in a diagonally downward direction through the force application plate at any rate not more than 0.5 inch per second, until a force of 500 pounds has been applied.
- 5. Apply additional force in a diagonally downward direction through the force application plate at a rate of not more than 0.5 inch per second until the force specified in (a) has been applied, and maintain this application of force.
- 6. Measure the diagonal movement of any point on the force application plate that occurred during the application of force in accordance with (b)(5), and open the emergency exits as specified in (a)(2).
- 7. Release all diagonal force applied through the force application plate, and operate the emergency exits as specified in (a)(2).

(c) Test Conditions: The following conditions apply to the requirements specified in (3).

- 1. Temperature: The ambient temperature is between 32 degrees F and 90 degrees F.
- 2. Windows and Doors: Vehicle windows, doors, and emergency exits are in the fully-closed position and latched but not locked.

(d) An alternative method of testing for the racking load test shall be as follows:

The racking load shall be applied along a line connecting the most distant points on a transverse cross-section of the bus interior. It produces a shear distortion of the cross-section, as shown in figure 2.

A representative method of loading that employs a hydraulic jack to load a two-frame test assembly is illustrated in figure 2.

The maximum jack load for the two-frame assembly is determined by the following formula:


J = 2P J - maximum jack load for two-frame test assembly P = load/frame


where P = Dynamic Vehicle Weight (DVW) divided by N
DVW - dynamic vehicle weight
N - total number of bus body frames

and DVW = DF x GVW
DF - dynamic factor, not less than 1.5
GVW - gross vehicle weight

Thus, for a DF = 1.5, a GVW = 22,000 pounds-force (lbf) and N= 11, the dynamic vehicle weight is DVW = 33,000 lbf, the load/frame is P = 3000 lbf and the maximum jack load is J = 6000 lbf.

When a complete bus body is rack-loaded, the total load DVW must be distributed uniformly along the bus body. This may be accomplished by mounting a series of hydraulic jacks along the length of the bus interior. Seats may be removed to facilitate jack mounting. The rack load will be considered to be uniformly distributed when the variation in the hydraulic jack readings is less than 10 percent. A maximum load is the sum of all jack readings and shall equal DVW.

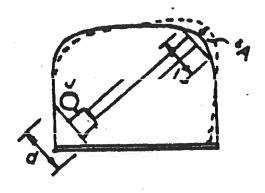



Transverse Cross Section

Side View

Figure 2. Arrangement of Hydraulic Jack for Rack-Loading of Two-Frame Assembly

The test may be performed on a complete bus body or on a representative section composed of at least two complete frames (body posts plus roof bows) and floor. Standard seats may be installed in the test section in a manner identical to that of the full bus body. Fabrication procedures for the test assembly shall be identical to those used in normal bus body production.

A two-cycle loading sequence shall be conducted, with intermediate and final load and deflection readings recorded, according to the procedure described.

The maximum deflection in line with the jack (A, maximum) shall not exceed 4 inches.

Manufacturer shall specify which testing method was used and submit appropriate certification information.

# APPENDIX C KENTUCKY POLE TEST PROCEDURES


#### **KENTUCKY POLE TEST**

The Kentucky Pole Test shall be required on or before the acceptance date of the first bus of the respective configuration.

#### **TEST PROCEDURE:**

The body shall be impacted at any point along the roof line on the outside surface, using an 8-inch diameter cylinder, 48 inches long, at a 30 to 45 degree angle, 1 to 3 inches above the top window line. The cylinder shall impact the roofline with the 48 inches dimension in a vertical plane with a force not to exceed 10 inches maximum to 8 inches minimum penetration of the body panels into the passenger compartment after impact.

The manufacturer shall submit appropriate certification information.





# FLORIDA DEPARTMENT OF EDUCATION MANNY DIAZ, JR. COMMISSIONER

www.fldoe.org

# FLORIDA DEPARTMENT OF EDUCATION fldoe.org

Manny Diaz, Jr.

**Commissioner of Education** 

**State Board of Education** 

Tom Grady, Chair Ben Gibson, Vice Chair Members Monesia Brown Esther Byrd Grazie Pozo Christie Ryan Petty Joe York

November 29, 2022

Mr. Mike McCullough Executive Operations Manager Sun State International Trucks, LLC 6020 Adamo Drive Tampa, Florida 33619

Dear Mr. McCullough:

Based on your October 19, 2022, response to Invitation to Bid (ITB) No. 2023-02, the Florida Department of Education (FDOE) would like to offer your company a contract to furnish Types C and D complete school buses, Multi-function School Activity Buses, and optional equipment. Attached is a list of the units and prices for each awarded bus configuration.

Please send a performance bond or cashier's check in the amount of \$750,000, made out to "Florida Department of Education and Purchasing School Districts," guaranteeing performance for units of all types manufactured under this contract to: Office of the Comptroller, Attention: Matt Kirkland, 325 West Gaines Street, Suite 914, Tallahassee, Florida 32399-0400. In addition, please respond in writing accepting this bid, and sign and return the original contract form included in the ITB. Assuming receipt of your performance bond and acceptance of this contract, FDOE will process purchase orders received from eligible users of the contract from January 1, 2023, through December 31, 2025.

Should you have any questions, please contact Director of School Transportation Robert Manspeaker, at Robert.Manspeaker@fldoe.org or 850-245-9795.

Sincerely,

Suzanne Pridgeon

SP/rm

Attachment

cc: Mark Eggers, Assistant Deputy Commissioner, Division of Finance and Operations

Matt Kirkland, Chief Comptroller

Robert Manspeaker, Director, School Transportation Management

Janice Brown, Assistant Deputy Commissioner, Contracts, Grants and Procurement

Suzanne Pridgeon
Deputy Commissioner, Finance and Operations

From: Mike McCullough < Mike. McCullough@sunstateintl.com>

Sent: Thursday, December 1, 2022 10:12 AM

To: Manspeaker, Robert <Robert.Manspeaker@fldoe.org>; Gray, Ray <Ray.Gray@fldoe.org>

Cc: Dianna Chesney < Dianna. Chesney @sunstateintl.com>; Paul Dearth < Paul. Dearth @sunstateintl.com>

Subject: ITB 2023-02 Contract

#### Robert:

Please accept this note as Sun State International's acceptance and approval of the award for buses per ITB 2023-02. Attached is our signed contract for this awarded ITB.

We are moving forward with acquiring the Performance Bond and will forward to you a soon as we receive it.

Should you have any questions or require additional information please let me know.

Thanks,

#### Mike McCullough

Executive Operations Manager Sun State Bus Centers 6020 Adamo Dr Tampa FL 33619 Mike.McCullough@sunstateintl.com 813-226-7330.

Mobile: 813-226-7330

www.sunstatebuscenters.com/





Disclaimer Confidentiality Notice: This email and its contents may contain information that is privileged, confidential, proprietary or otherwise protected by law. If you are not the intended recipient, please do not disclose or use the information. If you have received this email in error, please notify the sender and delete it immediately. Sun State is not liable for any loss or damage arising in any way from this message or its attachments and accepts no responsibility for personal emails, or emails unconnected with the company's business.

#### RENEWABLE PERFORMANCE BOND

Bond Number: <b>014251455</b>	_
KNOW ALL MEN BY THESE PRESENTS, 7	That we, Sun State International, LLC
	, (hereinafter called the Principal), as Principal, and
The Ohio Casualty Insurance Company	, duly organized under the laws of the State of New Hampshire ,
(hereinafter called the Surety), as Surety, are h	reld and firmly bound unto Florida Department of Education (FDOE) and Purchasing
School Districts	, (hereinafter called the Obligee), in the sum of
Seven Hundred Fifty Thousand Dollars And Z	
(\$750,000.00 ) Dollars, for the paym bind ourselves, our heirs, executors, administra	nent of which sum well and truly to be made, we, the said Principal and the said Surety, ators, successors and assigns.
WHEREAS, said Principal has entered into a v	written Contract with said Obligee, dated January 1, 2023
for Types A, C and D Buses and Optional Equi	ipment
referred to and made a part hereof as if fully se	, in accordance with the terms and conditions of said Contract, which is hereby
said Principal kept, done and performed, at the reimburse to the above named Obligee, all loss of said Principal so to do, then this obligation s  FURTHERMORE, Notwithstanding the provis  2023 , until December 31  However, neither non-renewal by the Surety, non-renewal, shall itself constitute a loss to tiliability of the Surety under this bond and all shall in no event exceed the amount as set forth as supplements thereto. In no event shall Surety	Il and singular, the matters and things in said contract set forth and specified to be by e times and in the manner in said contract specified, or shall pay over, make good and s and damage which said Obligee may sustain by reason of failure or default on the part shall be null and void; otherwise shall remain in full force and effect.  Sions of the Contract, the term of this bond shall apply from January 1, and may be extended by the Surety by Continuation Certificate. The failure or inability of the Principal to file a replacement bond in the event of the obligee recoverable under this bond or any renewal or continuation thereof. The lacontinuation certificates issued in connection therewith shall not be cumulative and in in this bond or in any additions, riders, or endorsements properly issued by the Surety by's aggregate liability exceed the penal sum of this bond.  The Obligee to recover on this bond shall be sustained unless the same be commenced in Principal ceased work on said Contract.
Please send claims to: Liberty Mutual Surety C	
P.O. Box 34526	Seattle, WA 98124
Signed and sealed this 5th day of Ja	nuary , 2023
(fill in Principal's name) Principal Sun State International, LLC	
By: Alles feel the	
NAME OF SURETY COMPANY	
Surety The Ohio Casualty Insurance Company	JALTY INSUR
By: Attorney-in-Fact Lisa Parsley	TO THE STATE OF TH
Acknowledged and Accepted this da	y of,,
By:	
Name:	
Title:	

LMS-20858e 06/19



This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

> Liberty Mutual Insurance Company The Ohio Casualty Insurance Company West American Insurance Company

POWER OF ATTORNEY

(NOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that
iberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized
inder the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Angelia
Keith; Blaine Buschmann; Briggs Orsbon; Carrie Lacy; Connie Roe; Dana Franzman, Dawn Bryant-Smith, Jennifer Kellum; Jennifer Kimbler, Jessica M. Bailey, Kari
Haston; Laverne Carr; Lisa Parsley; Matt Smith; Nikki L. Rutledge; Nita Knies; Paige N. Sexton; Robin Cornelius; Susan Foust; Susan L. Morlock; Theresa Calloway;
Thomas E. Niccum

each individually if there be more than one named, its true and lawful attorney-in-fact to make, all of the city of state of execute, seal, acknowledge and deliver, for and on its behalf as surely and as its act and deed, any and all undertakings, bonds, recognizances and other surely obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 14th day of June 2022

INSUA





Liberty Mutual Insurance Company The Ohio Casualty Insurance Company West American Insurance Company

Certificate No: 8208149-983964

(POA) verification inquiries, HOSUR@libertymutual.com

David M. Carey, Assistant Secretary

State of PENNSYLVANIA County of MONTGOMERY

2022 before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance 14th day of June Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.



Commonwealth of Pennsylvania - Notary Seal Teresa Pastella, Notary Public Montgomery County My commission expires March 28, 2025 Commission number 1126044 Member, Pennsylvania Association of Notaries

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV - OFFICERS: Section 12. Power of Attorney.

For bond and/or Power of Attorney please call 610-832-8240 or email l Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII - Execution of Contracts: Section 5. Surety Bonds and Undertakings.

Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation -- The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-infact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety

Authorization - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 5th day of







Renee C. Llewellyn, Assistant Secretary

LMS-12873 LMIC OCIC WAIC Multi Co 02/21

# State of Florida Florida Department of Education Bureau of Contracts, Grants and Procurement Management Services 332 Turlington Building 325 West Gaines Street Tallahassee, Florida 32399-0400

#### **BID REGISTRATION**

*********	***************************************
****	COMPLETE AND RETURN THIS FORM
BID NO.: <u>ITB 2023-02</u>	
TITLE: Type A, Type C and Ty	pe D School Buses and Optional Equipment
DATE & TIME DUE: Wedne	sday, October 19, 2022 @ 09:15 a.m., Eastern Time (ET)
Management Services by retuinformation below and send <b>this</b>	the Florida Department of Education, Bureau of Contracts, Grants and Procurement of this Bid Registration Form as soon as possible after downloading. Complete the <b>sheet only</b> to <a href="mailto:Anita.Wimberly@fldoe.org">Anita.Wimberly@fldoe.org</a> (preferred). Form may also be faxed to fax number West Gaines Street, 332 Turlington Building, Tallahassee, Florida 32399-0400.
COMPANY NAME:	
CONTACT PERSON:	
ADDRESS:	
CITY, STATE, ZIP:	
TELEPHONE:	( ) FAX NUMBER: ( )
INTERNET E-MAIL ADDRESS:	
SIGNED:	DATE:

For further information about this bidding on contracts for the State of Florida, you may contact Anita Wimberly at 850-245-9289 or <a href="mailto:Anita.Wimberly@fldoe.org">Anita.Wimberly@fldoe.org</a>.

(Revised 08/01/2020)

# State of Florida Department of Education

#### **INVITATION TO BID**

#### TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT

**BID NUMBER: ITB 2023-02** 

#### **DEADLINES**

TECHNICAL QUESTIONS: <u>September 2, 2022 @ 5:00 PM EASTERN TIME</u>
BID RESPONSE SUBMITTAL DUE: OCTOBER 19, 2022 @ 09:15 AM EASTERN TIME

ESTIMATE POSTING DATE: November 4, 2022

#### MAIL OR DELIVER BID RESPONSES TO:

Florida Department of Education
Bureau of Contracts, Grants and Procurement Management Services
325 West Gaines Street
344 Turlington Building
Tallahassee, Florida 32399-0400
Attention: Anita Wimberly

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT Table of Contents

BID F	REGISTRATION	1
•	SECTION 1 -INSTRUCTIONS	6
1.0	GENERAL INSTRUCTIONS TO RESPONDENT	6
•	SECTION 2 – CONTRACT CONDITIONS	6
2.0	GENERAL CONTRACT CONDITIONS	6
•	SECTION 3 - INTRODUCTION	6
3.0 3.1	INTENTBACKGROUND	7
3.2 3.3	DEFINITIONSSCHEDULE OF EVENTS (ALL DATES IN BID SUBJECT TO CHANGE)	
•	SCHEDULED ACTIVITY	
•	DATE	9
•	SECTION 4 – SPECIAL INSTRUCTIONS	9
4.0	NON-RESPONSIVE BIDS, NON-RESPONSIBLE BIDDERS	
4.1	POOR PERFORMANCE NOTICE	
4.2 4.3	QUESTIONSRESTRICTIONS ON COMMUNICATIONS WITH DEPARTMENT STAFF	10 10
4.3 4.4	PROCUREMENT PROTESTS/NOTICE OF RIGHTS	
4.5	ADDENDA	
4.6	MINOR EXCEPTIONS	
4.7	COPYRIGHTED MATERIAL	
4.8	CONFIDENTIAL MATERIAL	
4.9	PREPARATION COST	12
4.10	WITHDRAWAL	12
4.11	PUBLIC OPENING OF BID RESPONSES	
4.12	CORRECTION OF BID RESPONSE ERRORS	
4.13	VISITOR PASS TO THE TURLINGTON BUILDING	13
4.14	ACCESSIBILITY FOR DISABLED PERSONS	13
4.15	RESPONSE DURATION	_
4.16	PRICING	
4.17	AWARD	
4.18	AUTHORIZATION TO DO BUSINESS IN THE STATE OF FLORIDA	
4.19	LICENSED TO CONDUCT SERVICES IN THE STATE OF FLORIDA	
4.20	NOTICE TO CONTRACTOR	
4.21	QUALIFICATIONS	
4.22	SUBMISSION OF BID RESPONSES BY SUBSIDIARIES OR AFFILIATES	
4.23 4.24	IDENTICAL EVALUATION OF BID RESPONSESINDEPENDENT PRICE DETERMINATION	
4.24	METHOD OF PAYMENT	
4.25	EXTENSION	
4.27	INSPECTION AUDIT AND MAINTENANCE OF REPORTS	
4.28	DIVERSITY IN CONTRACTING	
4.29	SUB-CONTRACTING	
4.30	CONTRACTUAL OBLIGATIONS	
-		

4.31	CONTRACT COMPLETION	
4.32	DISPOSITION OF BID RESPONSES	
4.33	TRANSPORTATION AND DELIVERY	
4.34 4.35	ALTERNATESWARRANTY/SUBSTITUTIONS	
4.36	REPLACEMENT/RESTOCKING	
4.37	PRODUCT REQUIREMENTS/SPECIFICATIONS	
4.38	ACCEPTANCE	
•	SECTION 5- SPECIAL TERMS AND CONDITIONS	19
5.0	PRE-BID CONFERENCE: A PRE-BID CONFERENCE WILL NOT BE HELD	19
5.1	SITE INSPECTION: WILL NOT BE REQUIRED	
5.2	PERFORMANCE BOND OR CASHER'S CHECK	19
5.3	INSURANCE, WORKERS' COMPENSATION	
5.4	INSURANCE, GENERAL LIABILITY	
5.5	INDEMNIFICATION	
5.6 5.7	EMPLOYEE REQUIREMENTSPARTICIPATION IN FUTURE STAGES OF THIS PROJECT	
5.8	INFORMATION TECHNOLOGY REQUIREMENTS	
5.9	SCRUTINIZED COMPANIES LISTS	
5.10	SCRUTINIZED COMPANIES – TERMINATION	
•	SECTION 6 – SCOPE OF SERVICES	21
6.0	SCOPE OF SERVICES	21
6.1	DELIVERABLES (Status Reports)	
6.2	FINANCIAL CONSEQUENCES (Liquidated Damages)	
•	SECTION 7 – SPECIAL INSTRUCTIONS – BID RESPONSE FORMAT & CONTENT	22
7.0	BID RESPONSE SUBMISSION	
7.1	BID CONDITIONS	
7.2	BID RESPONSE FORMAT INSTRUCTIONS	23
•	SECTION 8 – SUBMITTALS AND EVALUATION	31
8.0	PRELIMINARY SUBMITTAL REVIEW	
8.1	POSTING OF BID TABULATION	32
8.2	PROTEST OF BID TABULATION OR PROCUREMENT TERMS	
8.3 8.4	INABILITY TO POSTAWARD OF THE CONTRACT	
8.5	SUBMISSION OF ALTERNATE RESPONSES	
•	ATTACHMENT '1'	
VEND	DOR'S BID SHEET	
•	ATTACHMENT '2'	34
DISC	LOSURE STATEMENT	34
	ATTACHMENT '3'	
DRUG	G-FREE WORKPLACE	35
•	ATTACHMENT '4'	36

MINORITY SUBCONTRACTORS UTILIZATION SUMMARY	36
ATTACHMENT '5'	37
SCRUTINIZED COMPANIES LISTS	37
ATTACHMENT 7 - BIDDER REPRESENTATION	39
ATTACHMENT 8 - PURCHASE ORDER/CUSTOMER CONTACT PREFERENCE INFORMATION	40
ATTACHMENT 9 - FILE STRUCTURE FOR REQUIRED STATUS REPORT	41
ATTACHMENT 11 - FLORIDA SCHOOL BUS SPECIFICATIONS, EFFECTIVE JANUARY 2023	46
ATTACHMENT 12 – FMVSS AND GAWR LETTER OF ATTESTATION	47
ATTACHMENT 13 – POWER LIFT COMPLIANCE LETTER OF ATTESTATION	48
ATTACHMENT 14 – CHASSIS DELIVERY DATES LETTER	49
ATTACHMENT 15 – LIQUIDATED DAMAGES ACKNOWLEDGEMENT LETTER	50
ATTACHMENT 16 – SEAT COVERING SPECIFICATIONS LETTER OF ATTESTATION	51
ATTACHMENT 17 – CHASSIS PERFORMANCE LETTER OF ATTESTATION	52
ATTACHMENT 18 – PRE-DELIVERY PROGRAM OUTLINE	53
ATTACHMENT 19 – BID ADDENDA (IF ANY)	54
ATTACHMENT 20 – STATE OF FLORIDA, DEPARTMENT OF EDUCATION ATTACHMENT C STAND TERMS AND CONDITIONS	
BID RESPONSE CHECKLIST	60

#### **SECTION 1 – INSTRUCTIONS**

#### 1.0 GENERAL INSTRUCTIONS TO RESPONDENT

This section contains instructions explaining the solicitation process and the actions necessary to respond. General Instructions to Respondent (Form PUR 1001 – incorporated herein by reference) is a downloadable document that must be downloaded for review and need not be returned with the respondent's bid. Form PUR 1001 may be accessed at <a href="http://dms.myflorida.com/business operations/state\_purchasing">http://dms.myflorida.com/business operations/state\_purchasing</a> under "Documents, Forms, References, and Resources."

In the event of any conflict between Form PUR 1001 and other instructions provided in this document, the additional instructions in this document shall take precedence over the Form PUR 1001 unless any section requires the conflicting term of the Florida Statutes, in which case the statutory requirements shall take precedence.

ALTHOUGH THE ITB MAY USE MANDATORY WORDS LIKE "SHALL," "WILL," "SHOULD," OR "MUST," AND MAY DEFINE CERTAIN ITEMS AS REQUIREMENTS, THE DEPARTMENT RESERVES THE RIGHT, IN ITS DISCRETION, TO WAIVE ANY DEVIATIONS FROM THESE PROVISIONS. IN ADDITION, THERE IS NO GUARANTEE THAT SUCH DEVIATIONS WILL BE DEEMED IN THE STATE'S BEST INTEREST OR A MINOR IRREGULARITY.

#### **SECTION 2 – CONTRACT CONDITIONS**

#### 2.0 GENERAL CONTRACT CONDITIONS

Standard terms and conditions that will apply to the contract which results from the solicitation event are provided in this section. General Contract Conditions (Form PUR 1000 – incorporated herein by reference) is a downloadable document that must be downloaded for review and need not be returned with the respondent's bid. Form PUR 1000 may be accessed at <a href="http://dms.myflorida.com/business\_operations/state\_purchasing">http://dms.myflorida.com/business\_operations/state\_purchasing</a> under "Documents, Forms, References, and Resources."

In the event of any conflict between the PUR 1000 form and any other Special Conditions, the Special Conditions shall take precedence over the PUR 1000 form unless any section requires the conflicting term in the PUR form of the Florida Statutes, in which case the term contained in PUR 1000 shall take precedence.

#### **SECTION 3 - INTRODUCTION**

#### 3.0 INTENT

The State of Florida Department of Education (hereinafter referred to as the "Department") is soliciting written Bid Responses from qualified vendors to establish a term contract for the purchase of Type A, Type C, and Type D school buses and optional equipment. The term is anticipated to begin on January 1, 2023, and be effective for thirty-six (36) months thereafter, with an annual price adjustment based on the Producer Price Index (PPI) for commodity series *Id:* WPU1413 Transportation equipment-Truck and bus bodies, not seasonally adjusted and published by United States Department of Labor, Bureau of Labor Statistics at https://data.bls.gov/cgi-bin/srgate.

The price adjustment (increase/decrease) will be made after the first 12 months of the contract, calculated using the annual index total for the 2022 calendar year as the beginning index point and made effective on February 1 of each subsequent contract year. The price adjustment calculation shall be made as follows. The annual index total divided by the previous annual index total will determine the FACTOR to be multiplied by the base bid price for each school bus configuration. EXAMPLE: Base bus bid price =\$90,000. Index total for 2021= 272.198. Index total for 2020= 261.900. (272.198/261.900= 1.039) The base bid bus of \$90,000 x FACTOR of 1.039 = \$93,510 for a price

increase of 3.90% or \$3,510. All prices are rounded to the nearest whole dollar amount. Prices will be calculated by the department and published on the school transportation web page at <a href="https://www.fldoe.org/schools/healthy-schools/transportation/">https://www.fldoe.org/schools/healthy-schools/transportation/</a>. These specifications intend to set forth and convey to prospective bidders the general type, character, performance, and level of quality of the vehicles desired by the department and purchasing school districts. The contractor is authorized to provide vehicles to all eligible users in the State of Florida. The sale of any vehicles to an eligible user not included in the definition herein is prohibited unless the contractor has received prior written approval from the department. Such services are outlined in an addendum hereto executed by all parties. The parties agree that the laws and rules that apply to this contract shall be those applicable to contracts in excess of Purchasing Category Two, or \$35,000, as defined in s. 287.017, Florida Statutes (F.S.).

The resulting contract may be renewed for up to three (3) one-year terms. See Form PUR 1000 for renewal requirements.

#### 3.1 BACKGROUND

Pursuant to S. 1006.27, F.S., the department shall assist district school boards in securing school buses at prices that are as reasonable as possible by providing a plan under which district school boards may voluntarily pool their bids for such purchases and prepares and awards term contracts for the purchase of various types of school buses and optional equipment, and makes the contracts available to district school boards. From time to time, district school boards must furnish the department with information concerning the prices paid for such items. The department periodically furnishes to district school boards information concerning the lowest prices at which school buses, equipment, and related supplies are available based on comparable specifications.

School bus units may be purchased by Florida district school boards, charter schools, and the Florida School for the Deaf and the Blind (FSDB); and may be purchased by eligible private schools pursuant to the requirements described in s. 1002.42(15)(a), F.S.

Representatives of the Florida Department of Management Services, State Purchasing, may be asked to serve as advisors in the final determination and acceptance of bids.

#### 3.2 **DEFINITIONS**

As used herein, the following definitions apply:

- 1. <u>Bid</u>: All documents and materials contained in the formal ITB package submitted by a bidder in response to this solicitation.
- 2. <u>Bid Response</u>: The bidder's complete response to the ITB, including properly completed forms and supporting documentation.
- 3. <u>Bidder</u>: A potential contractor, acting on his or her behalf and behalf of those individuals, partnerships, firms, or corporations comprising the bidder's team, who submits a response to this solicitation.
- 4. <u>Configuration</u>: Each unique combination of the following vehicle characteristics: bus type, bus capacity (e.g., 77 capacity), and wheelchair lift (if applicable). An example of a configuration for this purpose is Type C, 77 capacity with lift.
- 5. <u>Contract</u>: The agreement entered into between the department and the successful bidder after completing the Invitation to the Bid process.
- 6. <u>Contractor</u>: The successful bidder, selected as a result of this ITB with whom the department executes a contract to provide the required services.
- 7. <u>Deliverable</u> A tangible, specific, quantifiable, and measurable event or item that must be produced to complete a project or part of a project directly related to the scope of services.
- 8. **Department**: Refers to the Florida Department of Education.
- 9. Eligible Users: Florida district school boards, charter schools, FSDB, and eligible private schools.
- 10. **FDOE**: Florida Department of Education

- 11. **FE**: Front-engine.
- 12. **FSDB**: Florida School for the Deaf and the Blind.
- 13. **N/A or NA**: Not available or not applicable.
- 14. **N/B or NB**: No bid submitted for base bus or option. A "no-bid" on a base bus or option will continue to be considered as "no-bid" throughout the term of the contract, including dealer-offered options.
- 15. **N/C or NC**: No-charge item the department reserves the right to determine whether the item is included as standard equipment.
- 16. PB: Parent bore engine.
- 17. Price: Base unit or option price.
- 18. **RE**: Rear engine.
- 19. <u>Ready-to-Use Condition</u>: Units meeting all applicable specifications, with all equipment functioning properly and without substantive defects (as determined by the Florida Department of Education, School Transportation Management Section).
- 20. <u>Responsive Bidder</u>: A person who has submitted a bid response that conforms in all material aspects to the ITB.
- 21. <u>Responsible Bidder:</u> A bidder who demonstrates the capacity in all respects to satisfy the contract requirements with the integrity and reliability that will assure good-faith performance.
- 22. **STD**: Standard.
- 23. **STMS**: School Transportation Management Section.
- 24. <u>Unit(s)</u>: Buses produced and sold via the Florida Department of Education's Bid No: ITB 2022-01 for School Buses and Optional Equipment.
- 25. **Vehicles**: Collective reference to various Type A, Type C, and Type D school buses and optional equipment.
- 26. **Vendor:** A potential contractor acting on his or her behalf and behalf of those individuals, partnerships, firms, or corporations comprising the vendor's team who has not yet submitted a response to this solicitation.
- 27. VBS: Vendor Bid System.
- 28. WS: Wet-sleeve engine.

REMAINDER OF PAGE INTENTIONALLY LEFT BLANK

#### 3.3 SCHEDULE OF EVENTS (ALL DATES IN BID SUBJECT TO CHANGE)

SCHEDULED ACTIVITY	DATE	METHOD/CONTACT
ITB Release	August 19, 2022	Vendor Information Portal (VIP) Advertisement Website –
		MyFloridaMarket Place Vendor Information Portal
Prospective Bidder	September 2, 2022	Questions must be identified as such and submitted
Technical Questions Due	September 2, 2022	by mail, email (preferred) or facsimile to:
on or before:		Anita Wimberly
		325 West Gaines Street, 344 Turlington Building
		Tallahassee, Florida 32399-0400
		anita.wimberly@fldoe.org
		Fax 850-245-0719
Departmental Answers	<u>September 23, 2022</u>	Written response (addenda) to any written questions
Provided to Bidder		received by deadline will be provided via the VIP Advertisement Website -
Questions		MyFloridaMarket Place Vendor Information Portal
ITB RESPONSES DUE	October 19, 2022	Submit to:
(FAX NOT	Must Be	Florida Department of Education
ACCEPTABLE)	Received	Procurement Office
OPENINGS WILL BE	<b>NO LATER THAN</b>	Attn: Anita Wimberly
CONDUCTED VIA CONFERENCE	9:15 a.m.	325 West Gaines Street, 344 Turlington Building
CALL. TOLL-FREE: 888-585-		Tallahassee, Florida 32399-0400
9008; PIN: 818-095-394.	Opened	
Please allow enough time if hand- delivering your	_10:15 a.m.,	Bids will be opened in Room 1721
response to the building.	Eastern Time	of the Turlington Building at 10:15 a.m. Interested parties
1	Nevember 4 2022	can attend the bid opening via conference call.  VIP Advertisement Website –
Posting of Intended Decision (on or about)	November 4, 2022	MyFloridaMarket Place Vendor Information Portal
Enter Into A Contract	December 1, 2022	The department and contractor(s)
With Successful Bidders	Describer 1, 2022	The department and contractor(s)
(Anticipated)		
Anticipated Contract	Sunday, January 1,	The department and contractor(s)
Start Date	2023	. , ,
Anticipated Contract End	December 31, 2025	The department and contractor(s)
Date		

#### **SECTION 4 – SPECIAL INSTRUCTIONS**

#### 4.0 NON-RESPONSIVE BIDS, NON-RESPONSIBLE BIDDERS

Bid Responses that fail to provide material information may be rejected as non-responsive. A Bidder whose Bid Responses, past performance, or current status do not reflect the capability, integrity or reliability to perform fully and in good faith the Contract requirements may be rejected as non-responsible. The Department reserves the right to waive any minor irregularities or technicalities in any Bid Response received, to reject any or all Bid Responses in whole or in part, with or without cause, to solicit new Bid Responses or to accept the Bid Response which, in its judgment, will be in the best interest of the Department. The Department reserves the right to use any information presented in any response to this ITB.

#### 4.1 POOR PERFORMANCE NOTICE

The bidder should provide for both the bidder, and his/her employees, subcontractors and subcontractor employees copies of any documents regarding complaints filed, investigations made, warning letters or inspection reports issued, any notice of breach, a notice of default, termination notice, suspension notice, or any disciplinary action initiated or taken under any contract or job performance within the past seven (7) years. For each instance listed, provide a narrative summary of the contract's purpose and scope of work, the bidder's performance (including the project owner concerns), and any major adverse findings. Also, provide the contract or job number, the name of the owner; the term of the contract; and the name, address, and telephone number of the owner's contract manager. Please also include any relevant documentation evidencing the performance issues.

The Department reserves the right to seek further information on this matter from the bidder or make inquiries with the project owner. The information obtained from this review may be used to declare the bidder a non-responsible vendor.

#### 4.2 QUESTIONS

Potential Bidders should examine the ITB to determine if the Department's requirements are clearly stated. If there are any requirements, which restrict competition, the Bidder may request, in writing, to the State that the specifications be changed. The Bidder who requests changes to the State's specifications should identify and describe the Bidder's difficulty in meeting the State's specifications, provide detailed justification for a change, and provide recommended changes to the specifications. Questions concerning conditions and specifications of this ITB or requests for changes to the Bid Response should be received in writing by the Bureau of Contracts, Grants, and Procurement Management Services as specified in **SECTION 3.3 SCHEDULE OF EVENTS**. A Bidder's failure to request changes by the specified date shall be considered to constitute Bidder's acceptance of State's specifications. The State shall determine what changes to the ITB shall be acceptable to the State.

Questions may be e-mailed, faxed, or delivered to:

Florida Department of Education
Bureau of Contracts, Grants and Procurement Management Services
Attn: Anita Wimberly
325 West Gaines Street, Room 332
Tallahassee, Florida 32399-0400
E-mail (preferred): Anita.Wimberly@fldoe.org
FAX (850) 245-0719

#### 4.3 RESTRICTIONS ON COMMUNICATIONS WITH DEPARTMENT STAFF

Bidders shall not communicate with any Department staff concerning this ITB except for the Department contact person identified in <u>SECTION 4.2 QUESTIONS</u> of this ITB. Only those communications which are in writing from the Bureau of Contracts, Grants, and Procurement Management Services shall be considered as a duly authorized response on behalf of the Department. For violation of this provision, the Department reserves the right to reject a Bidder's Bid Response.

Bidders to this solicitation or persons acting on their behalf may not contact any employee or officer of the executive or legislative branch concerning any aspect of this solicitation, except in writing to the procurement officer or as provided in the solicitation documents. The restriction period is from the release of the solicitation and the end of the 72 hours following the agency posting the notice of intended award, excluding Saturdays, Sundays, and state holidays. Violation of this provision may be grounds for rejecting a Bid Response.

#### 4.4 PROCUREMENT PROTESTS/NOTICE OF RIGHTS

Pursuant to Florida Statutes, Section 120.57(3)(b):

Any person who is adversely affected by the agency decision or intended decision shall file with the agency a notice of protest in writing within 72 hours after the posting of the notice of a decision or intended decision. With respect to a protest of the terms, conditions, and specifications contained in a solicitation, including any provisions governing the methods for ranking bids, proposals, or replies, awarding contracts, reserving rights of further negotiation, or modifying or amending any agreement, the notice of protest shall be filed in writing within 72 hours after the posting of the solicitation. The formal written protest shall be filed within ten days after the notice of protest is filed. Failure to file a notice of protest or failure to file a formal written protest shall constitute a waiver of proceedings under this chapter. The formal written protest shall state with particularity the facts and law upon which the protest is based. Saturdays, Sundays, and state holidays shall be excluded in the computation of the 72-hour time periods provided by this paragraph.

Section 120.57(3)(a) provides:

Failure to file a protest within the time prescribed in section 120.57(3), Florida Statutes, or failure to post the bond or other security required by law within the time allowed for filing a bond shall constitute a waiver of proceedings under chapter 120, Florida Statutes.

Florida Administrative Code Rule 28-110.002(2) defines the term "decision or intended decision" and includes the solicitation terms (and any addenda), the award of the contract, and a rejection of all Bid Responses.

When filing the Formal Written Protest, the protestor must also file a Protest Bond payable to the Department in an amount equal to 1 percent of the estimated contract amount. Florida Statutes, Section 287.042(2)(c) and Florida Administrative Code Rule 28-110.005 contain further terms relating to the Protest Bond, including determining the estimated contract amount. In lieu of a Protest Bond, the Department will accept cashier's checks, official bank checks, or money orders. The bond shall be conditioned upon the payment of all costs and charges adjudged against the protestor in the administrative hearing. The action is brought and in any subsequent appellate court proceeding.

The Notice of Protest, Formal Written Protest, and Protest Bond shall be addressed to the issuing office as defined in **SECTION 7.0 BID SUBMISSION** and filed with the agency clerk.

#### 4.5 ADDENDA

No negotiations, decisions, or actions will be initiated or executed by a Bidder as a result of any oral discussions with a Department employee. Only those communications that are in writing from the Bureau of Contracts, Grants, and Procurement Management Services will be considered as a duly authorized expression on behalf of the Department.

If the Department determines that it should modify or interpret any portion of the ITB documents before the closing time and date, such changes will be included as a written addendum to the ITB. No other methodology will be considered binding or authorized in giving information concerning or explaining, or interpreting the ITB document.

Notice of changes (addenda) will be posted on the Florida Vendor Information Portal (VIP) at <a href="https://vendor.myfloridamarketplace.com/">https://vendor.myfloridamarketplace.com/</a> (click on Search Advertisements under the Florida Solicitation Advertisement section, then populate the Organization field with the Department of Education. Initiate search by clicking the Search button). Click on this bid number to review posted documents. It is the responsibility of all potential Bidders to monitor this site for any changing information prior to submitting a Bid Response.

NOTE: SIGNED ACKNOWLEDGEMENT OF ANY ADDENDA SHOULD ACCOMPANY ITB RESPONSE. FAILURE TO SUBMIT THE ACKNOWLEDGE FORM MAY RESULT IN DISQUALIFICATION OF THE BIDDER

#### 4.6 MINOR EXCEPTIONS

The Department may waive minor deviations or exceptions in Bid Responses, providing such action in the state of Florida's best interest. Minor deviations/exceptions are defined as those that have no adverse effect upon the State's interest and would not affect the Bid's amount by giving a contractor an advantage or benefit not enjoyed by other contractors.

#### 4.7 COPYRIGHTED MATERIAL

Copyrighted material will be accepted as part of a Bid Response only if accompanied by a waiver that will allow the Department to make paper and electronic copies necessary for use by Department staff and agents. It is noted that copyrighted material is not exempt from the Public Records Law, Chapter 119, Florida Statutes. Therefore, such material will be subject to viewing by the public, but copies of the material will not be provided to the public. All development and use of copyright material in fulfilling the Bid terms shall be governed by the terms of the contract between the Contractor and the Department.

#### 4.8 CONFIDENTIAL MATERIAL

The Department takes its public records responsibilities as provided under chapter 119, Florida Statutes and Article I, Section 24 of the Florida Constitution, very seriously. If respondent considers any portion of the documents, data, or records submitted in response to this solicitation to be confidential, trade secret or otherwise not subject to disclosure pursuant to chapter 119, Florida Statutes, the Florida Constitution, or other authority. In that case, the respondent should mark and identify in its response those portions, which are a confidential, trade secret, or otherwise exempt. The respondent should also simultaneously provide the Department with a separate redacted copy of its response. This redacted copy should contain the Department's solicitation name, number, and the name of the respondent on the cover and should be titled "Redacted Copy." The Redacted Copy should be provided to the Department simultaneously submits its response to the solicitation and must only exclude or obliterate those exact portions that are claimed confidential, proprietary, or trade secret.

The Bidder shall be responsible for defending its determination that the redacted portions of its response are a confidential, trade secret, or otherwise not subject to disclosure. Furthermore, the Bidder shall protect, defend, and indemnify the Department for all claims arising from or relating to respondent's determination that the redacted portions of its response are confidential, proprietary, trade secret, or otherwise not subject to disclosure.

If Bidder fails to submit a Redacted Copy with its response. In that case, the Department is authorized to produce the entire documents, data, or records submitted by the respondent to answer a public records request for these records. Notwithstanding the preceding, the Department reserves the right to disclose any materials as public records unless it determines, in its discretion, that an exemption to disclosure applies to the record.

#### 4.9 PREPARATION COST

ITB responses shall contain all information solicited, plus any additional data, prints, or literature that the Bidder deems pertinent to the Department's understanding and evaluation of their response. This ITB does not commit the Department or any other public agency to pay any costs incurred by the Bidder in submitting a Bid Response or making necessary studies or designs for the preparation thereof, nor to procure or contract for any articles or services.

#### 4.10 WITHDRAWAL

Bidders may modify submitted Bid Responses at any time before the Bid due date. Requests for modification of a submitted Bid Response should be in writing and signed by an authorized representative of the Bidder. Upon receipt and acceptance of such a request, the entire Bid Response will be returned to the Bidder and not considered unless resubmitted by the due date and time. Bidders may also send a change in a sealed envelope to be opened

simultaneously as the Bid Response. The ITB number, opening date, and time should appear on the modified Bid Response envelope.

#### 4.11 PUBLIC OPENING OF BID RESPONSES

Each Bid Response should be dated and time-stamped by the Department as received. Any Bid Response received after the specified deadline for Bid acceptance may be rejected and returned unopened to the Bidder. Bid Responses will be opened at the designated date and time at the Department's Bureau of Contracts, Grants, and Procurement Management Services, 332 Turlington Building, 325 West Gaines Street, Tallahassee, FL.

#### 4.12 CORRECTION OF BID RESPONSE ERRORS

Information required to be included in the Bid Response is expected to be present and accurate. Corrections of erroneous information or typographical errors may not be permitted after the Department has received the Bid Responses. The Contractor is solely responsible for proofreading their Bid Response and verifying its accuracy.

#### 4.13 VISITOR PASS TO THE TURLINGTON BUILDING

Each visitor to the Turlington Building must check in at the security desk in the main lobby. Please allow at least 15 minutes prior to Bid Response due time if hand-delivering your Bid Response to the Bureau of Contracts, Grants, and Procurement Management Services.

#### 4.14 ACCESSIBILITY FOR DISABLED PERSONS

Any person requiring a special accommodation because of a disability should call the Department's Bureau of Contracts, Grants, and Procurement Management Services at (850) 245-0735 at least five (5) workdays before the Bid opening. If you are hearing or speech impaired, please contact the Department using the Florida Relay Service, which can be reached at 1 (800) 955-8771 (TDD).

#### 4.15 RESPONSE DURATION

All submitted responses are binding until December 31, 2025, unless equitably adjusted as described in sections 3.0 Intent or 7.15 Delivery Pricing Adjustment.

#### 4.16 PRICING

All Bid prices to include the furnishing of all parts, labor, transportation, and incidental services or materials required. There shall be no additional costs charged for work performed under this Bid. All Bid prices should be submitted on the forms provided. All bid prices quoted for Type A, Type C, and Type D school buses and optional equipment should be in even dollar amounts. All bid prices for base units, standard options, and additional contract options, including warranty agreements, should be submitted on the Microsoft Excel worksheets provided in Attachment 1 - Vendor's Bid Pricing Sheets of this ITB. Pricing is also to be submitted in Microsoft Excel file format for base buses and options. These worksheets should be uploaded to the Vendor Information Portal (VIP) Advertisement Website – MyFloridaMarket Place Vendor Information Portal to the Procurement Agent listed in Section 4.0. Prospective bidders may also request to receive the electronic worksheets from Anita Wimberly at Anita.Wimberly@fldoe.org. The electronic worksheets are identical to the paper bid sheets included in the bid. Hard copies of price quotes are still requested but may be printed from the electronic spreadsheets. Pricing must include the furnishing of all parts, labor, transportation, incidental services, and materials required. There shall be no additional price charged for work performed under this bid. All bid prices must remain firm until December 31, 2025, unless equitably adjusted as described in sections 3.0 Intent or 7.15 Delivery Pricing Adjustment. Prices should be submitted on the forms provided in a SEALED ENVELOPE with the bid number written on the outside.

Each price sheet should be signed or initialed at the bottom of the page by the person who signs the transmittal letter.

Representatives of the Florida Department of Management Services, State Purchasing, may be invited to act as advisors in final determination and acceptance of bids.

Language in this document takes precedence over any conflicting language in the General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

#### **4.17 AWARD**

As in the State's best Interest, the right is reserved to award based on all or none, group of items, item by item or any combination thereof, to a responsive, responsible Bidder. As in the State of Florida's best interest the right is reserved to reject any, and all Bid Responses or to waive any minor irregularity in Bid Responses received. Conditions that may cause Bid Response rejection include, without limitation, evidence of collusion among Bidders, apparent lack of experience or expertise to perform the required work, failure to perform or meet financial obligations on previous contracts.

Bid tabulations will be posted and available for public viewing in the reception room of the Bureau of Contracts, Grants, and Procurement Management Services and posted on the VIP. A printed copy of the Bid tabulation will be available upon written request to the Bureau of Contracts, Grants, and Procurement Management Services. Telephone requests will not be accepted. Each written request should contain a self-addressed, stamped envelope and reference the Bid title and number. Bid tabulations will be posted and available for public viewing in the reception room of the Bureau of Contracts, Grants and Procurement Management Services.

Bid awards will be made in conformance with applicable requirements of chapter 287, F.S.; chapter 60A-1, F.A.C.; and the requirements of this ITB, where it includes additional or more specific procedures. Awards will be made for the following school bus configurations, as available, meeting standard Florida School Bus Specifications, Effective January 2023: Type A; Type C; Type D rear engine; and Type D front-engine, subject to the following procedures:

- A low price shall be calculated for each configuration based on the combination price for completed base units submitted on pricing page P-1 and average regional delivery cost using price quotes as supplied in this bid (Bid No: ITB 2023-02, Attachment 1 – Vendor's Bid Pricing Sheets).
- Bid awards will be made based on a multiple supplier award.
- Overall awards will be made to each responsive and responsible bidder for all configurations on which that bidder submits price quotes within 10 percent of the lowest price for that configuration. A configuration is defined as a unique combination of the following vehicle characteristics: bus capacity (e.g., 77 capacity), bus type (e.g., Type C), and wheelchair lift (if applicable). An example of a configuration for this purpose is a 77 capacity Type C with lift.

Technical variations to published bid award procedures may be invoked at the discretion of the department when necessary to ensure equitability.

#### 4.18 AUTHORIZATION TO DO BUSINESS IN THE STATE OF FLORIDA

Foreign corporations and foreign limited partnerships should be authorized to do business in the State of Florida. Domestic corporations should be active and in good standing in the State of Florida. Such authorization and status should be obtained by the Bid due date and time, but in any case, they must be received before contract execution. For authorization, contact:

Florida Department of State Tallahassee, Florida 32399 (850) 245-6053

#### 4.19 LICENSED TO CONDUCT SERVICES IN THE STATE OF FLORIDA

If the service(s) being provided requires that individuals be licensed by the Florida Department of Business and Professional Regulation or any other state or federal agency. In that case, such licenses should be obtained by the Bid due date and time, but in any case, they must be obtained before contract execution. For State licensing, contact:

Florida Department of Business and Professional Regulation Tallahassee, Florida 32399-0797 (850)487-9501

#### 4.20 NOTICE TO CONTRACTOR

The Department shall consider the employment by any Contractor of unauthorized aliens a violation of Section 274A (e) of the Immigration and Nationalization Act. If the Contractor knowingly employs unauthorized aliens, such violation shall cause unilateral cancellation of this contract.

#### 4.21 QUALIFICATIONS

Manufacturers, distributors or dealers must meet the certification requirements described in rule 6A-3.003, F.A.C., to participate in this ITB. The Department will determine whether the Bidder is qualified to perform the contracted services based upon their Bid Response demonstrating satisfactory experience and capability in the work area. The Bidder should provide a letter to identify necessary experienced personnel and facilities to support the activities associated with this Bid.

Those individuals who will be directly involved in the project should have demonstrated experience in the areas delineated in the scope of work. Individuals whose qualifications are presented will be committed to the project for its duration unless otherwise excepted by the Department. If it becomes necessary for the Contractor to substitute key personnel, In that case, such substitution will take place in consultation with the Department and will be made upon the Department's prior approval, which will not be unreasonably withheld.

#### 4.22 SUBMISSION OF BID RESPONSES BY SUBSIDIARIES OR AFFILIATES

A Bidder, its subsidiaries, affiliates, or related entities is limited to one Bid Response. Submission of more than one Bid Response per activity by a Bidder may cause the rejection of all bids submitted by the Bidder. In the alternative, the Department may decide which bid to evaluate and consider at its sole discretion. A subsidiary or affiliate of a prime Bidder may also be included as a subcontractor in another Bidder's Bid Response.

#### 4.23 IDENTICAL EVALUATION OF BID RESPONSES

Whenever two or more Bid Responses are equal with respect to price, quality, and service are received, the Department will determine the order of award using the criteria established in 60A-1.011, Florida Administrative Code. The "Drug-Free Workplace Program Certification" can be found in Attachment '3'.

#### 4.24 <u>INDEPENDENT PRICE DETERMINATION</u>

A Bidder shall not collude, consult, communicate, or agree with any other Bidder regarding this procurement as to any matter relating to the Bidder's Response.

#### 4.25 <u>METHOD OF PAYMENT</u>

Payment will be made in accordance with the terms and conditions of the purchase order or contract.

Payments will be made in accordance with s. 215.422, F.S., which delineates contractor's rights and the eligible users' responsibilities concerning time allowances for payment of invoices and applicable interest penalties. Pursuant to s. 287.058, F.S., all invoices must be submitted in detail sufficient for a proper pre-audit and post-audit thereof.

Please see ss. 4.35, 7.3, 7.4, and 7.9 for specific requirements related to acceptance of and payment for school buses.

Subject to the requirements for acceptance, all payment for Type A, C, and D buses will be due within 40 days after acceptance by the local purchasing agency or receipt of invoice and the manufacturer's certificate of origin, whichever is later.

#### 4.26 EXTENSION

If circumstances arise that make performance by the Contractor impracticable or impossible within the time allowed or prevent a new contract from being executed. In that case, the Department, in its discretion, may grant an extension of the contract. Extension of the contract resulting from this Bid Response shall be in writing for a period not to exceed six (6) months and shall be subject to the same terms and conditions outlined in the contract. The Department, in its discretion, may grant a proportional increase in the total dollar amount based on the method and rate established in the contract. There shall be only one extension of the contract unless the failure to meet the criteria outlined in this ITB or resulting contract is due to events beyond the Contractor's Control. It shall be the Contractor's responsibility to ensure that sufficient time remains in the Project Schedule within which to complete services on the project. If there have been delays that would affect the project completion date. In that case, the Contractor shall submit a written request to the Department which identifies the reason(s) for the delay and the amount of time-related to each cause. The Department will review the request and decide as to granting all or part of the requested extension

#### 4.27 INSPECTION AUDIT AND MAINTENANCE OF REPORTS

A representative of the Department, the Comptroller of the State of Florida, or the Auditor General of the State of Florida, or their duly authorized representatives, shall have access, for purposes of examinations and recovery, to any books, documents, papers, and records of the Contractor as they may relate to this contract. The Contractor shall maintain books, records and documents according to acceptable accounting principles and practices that sufficiently and appropriately reflect the changes. The Department may unilaterally cancel any resultant contract for refusal by the Contractor to allow public access to all documents, papers, letters, or other material originated or received by the Contractor in conjunction with this contract subject to the provisions of Florida Statutes, Chapter 119.

#### 4.28 DIVERSITY IN CONTRACTING

The State of Florida is committed to supporting its diverse business industry and population by ensuring participation by minority-, women-, and service-disabled veteran business enterprises in the state's economic life. The State of Florida Mentor Protégé Program connects minority-, women-, and service-disabled veteran business enterprises with private corporations for business development mentoring. We strongly encourage firms doing business with the State of Florida to consider this initiative. For more information on the Mentor Protégé Program, please contact the Office of Supplier Diversity at (850) 487-0915.

The state is dedicated to fostering the continued development and economic growth of small, minority-, women-, and service-disabled veteran business enterprises. Participation by a diverse group of Vendors doing business with the state is central to this effort. To this end, it is vital that small, minority-, women-, and service-disabled veteran business enterprises participate in the state's procurement process as both Contractors and sub-contractors in this solicitation. Small, minority-, women-, and service-disabled veteran business enterprises are strongly encouraged to contribute to this solicitation.

Information on Certified Minority Business Enterprises (CMBE) and Certified Service-Disabled Veteran Business Enterprises (CSDVBE) is available from the Office of Supplier Diversity at: <a href="http://dms.myflorida.com/other\_programs/office\_of\_supplier\_diversity\_osd/">http://dms.myflorida.com/other\_programs/office\_of\_supplier\_diversity\_osd/</a>.

#### 4.29 SUB-CONTRACTING

The Contract or any portion thereof shall not be sub-contracted, except as permitted herein, or with the Department's prior written approval. No sub-contract shall, under any circumstances, relieve the Contractor of its liability and obligation under this contract. Despite any such sub-contracting, the Department shall deal through the Contractor, which shall retain the legal responsibility for performing the Contractor obligations.

If the Department approves any sub-contractors, the Contractor should provide a list of subcontractors to the Department's contract manager upon execution of the Contract. The Contractor should report all subcontractors, including, but not limited to, certified minority, women, and service-disabled veteran subcontracting activities using the attached Utilization Summary form, attached as Attachment 4. The Contractor should provide a list of subcontractors to the Department's contract manager upon execution of the Contract. The Contractor should provide the Utilization Summary form with each invoice submitted for payment, regardless if funds have not been spent with a certified minority, women, or service-disabled veteran subcontractor for the period covered by the invoice. Contact the Florida Department of Management Services (DMS), Office of Supplier Diversity, to identify qualified minority, women, and service-disabled veteran companies. The Office of Supplier Diversity can be reached at (850) 487-0915; the Internet Web address is

http://dms.myflorida.com/other\_programs/office\_of\_supplier\_diversity\_osd/ .

#### 4.30 CONTRACTUAL OBLIGATIONS

The Department's Contract Standard Terms and Conditions are incorporated in this ITB as Attachment '6' and govern the Contract Vendor and the Department's relationship. Bid Response(s) submitted by the successful Bidder(s) shall be incorporated into the final purchase order(s) or contract(s).

#### 4.31 CONTRACT COMPLETION

The Contractor will be required to ensure that each individual, partnership, firm, corporation, or subcontractor perform on the contract is subject to, and comply with, the contractual requirements. When contract negotiations are successfully concluded, a written agreement will be prepared, which will incorporate the following documents:

- This ITB
- Addenda to this ITB
- And the Bidder's Response

The Contractor shall begin performing services only upon execution of a valid contract between the parties.

#### 4.32 DISPOSITION OF BID RESPONSES

All Bid Responses become the property of the State of Florida and will be a matter of public record subject to the provisions of Chapter 119, Florida Statutes.

#### 4.33 TRANSPORTATION AND DELIVERY

Bidder must furnish a schedule showing the cost of delivery of each completed unit from the manufacturing plant to Florida's county seats by region as described in section <u>7.17 TIMELINES.</u>

#### 4.34 ALTERNATES

ALTERNATE BRANDS OR PRODUCTS WILL NOT BE CONSIDERED FOR THIS BID RESPONSE. BID AS SPECIFIED.

Bid as required per specifications provided in Attachment 11, *Florida School Bus Specifications, Effective January* 2023.

#### 4.35 WARRANTY/SUBSTITUTIONS

A warranty is required on all items purchased against defective materials, workmanship, and failure to perform following required industry performance criteria. Any deviation from these criteria must be documented in the bid response, or the above statement shall prevail. Delivery of substitute commodities requires prior written approval from the department.

Upon receiving an award and entering into a contract with the department, must warrant that all materials and services delivered to the department and purchasers under the contract conform to all of the specifications contained or referred to herein. The bidder must comply with warranty requirements provided in Attachment 11 - Florida School Bus Specifications, Effective January 2023. Failure or neglect of the department to require compliance with any term or condition of the contract or specifications shall not be deemed a waiver of such term or condition. By entering into a contract with the department, the awarded contractor warrants and represents that all materials and services delivered to the department and purchasers under the contract conform to all of the specifications included or referred to in the ITB document, attachments, and addenda.

By submitting this bid, the bidder agrees to accept, process, and pay within 45 days properly completed warranty claims on behalf of purchasing school districts via any paper forms, electronic system, or Internet-based warranty system that may be available. The warranty process will be initiated with the bidder or bidder's representative, who will either perform the warranty repairs or facilitate the warranty repairs if another entity performs them. Completed claims for warranty reimbursement not paid within 45 days shall incur 3 percent penalties for 0-30 day's late payment.

#### 4.36 REPLACEMENT/RESTOCKING

Replacement of all materials found defective within the warranty period shall be made without cost to the purchaser, including transportation if applicable. All fees associated with restocking canceled orders shall be the responsibility of the vendor.

#### 4.37 PRODUCT REQUIREMENTS/SPECIFICATIONS

Any deviation from specifications indicated herein must be pointed out; otherwise, it may be considered that items offered are in strict compliance with these specifications, and successful Bidder will be held responsible, therefore. Deviations must be explained in detail on a separate attached sheet(s).

#### 4.38 ACCEPTANCE

All buses shall be inspected and accepted or rejected by an authorized representative of the school board or other purchasing entity within ten business days of delivery or the completed units' picked up. Districts that take delivery on a quantity greater than five school buses within two-days shall be allowed one extra day for the number of buses over five. For example, a district that takes eight school buses delivery within two-days shall be allowed 13 business days to inspect and accept or reject the buses. Should any agency purchasing a bus not be satisfied that the requirements of the specifications have been met, representatives of the Florida Department of Education, School Transportation Management Section (STMS); the Florida Department of Management Services; State Purchasing, and the purchasing agency shall have the right to inspect the unit and issue an order of acceptance or rejection.

Purchasers must inspect the vehicle and compare the purchase order and the bidder's invoice, as well as the bidder's pre-delivery inspection form, to ensure that the vehicle meets or exceeds the requirements of Attachment 11 - *Florida School Bus Specifications, Effective January 2023*, and the purchase order. Purchasers must also inspect the vehicle for physical damage. Failure of the purchaser to discover an error (excluding physical damage) in the vehicle's components relating to specifications compliance and proper operation (subject to applicable warranties) will not relieve the bidder from correcting the error in the event it is found after the purchaser accepts the vehicle.

Delivery of the vehicle to a purchaser does not constitute acceptance for payment. Final acceptance and authorization of payment shall be given after a thorough inspection indicates that the vehicle meets contract specifications and is in ready-to-use condition.

At the time of the inspection, should the delivered vehicle differ in any respect from required specifications or exhibit poor fit, finish, or quality, 5 percent of the specific vehicle's payment may be withheld until the bidder completes necessary corrective action.

Vehicles provided under this bid are not considered "delivered" until:

- a. They are physically on the purchasing district's property,
- b. They are in ready-to-use condition and
- c. The manufacturer's certificate of origin (MCO), PDI form, manuals, and all associated literature have been delivered.

Language in this document takes precedence over any conflicting language in the General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

#### **SECTION 5- SPECIAL TERMS AND CONDITIONS**

- 5.0 PRE-BID CONFERENCE: A PRE-BID CONFERENCE WILL NOT BE HELD.
- 5.1 SITE INSPECTION: WILL NOT BE REQUIRED

#### 5.2 PERFORMANCE BOND OR CASHER'S CHECK

A performance bond or cashier's check will be required of all successful bidders of Type A, C, and D school buses and will be held by the Florida Department of Education, STMS, as surety of full, complete, and timely performance on any orders duly issued against the contract. The performance bond may be used to provide coverage for ALL aspects of compliance with the agreement, including, but not limited to, liquidated damages for delayed delivery, specifications compliance, warranty compliance, and re-procurement procedures in the event of contract non-compliance or default.

Successful bidders agree to furnish, within ten days after award of bids, at no additional cost to the department and school districts, a performance bond or cashier's check in the amount of \$750,000 for Type C and D bidders and \$100,000 for Type A-only bidders to guarantee the complete performance of the contract. Such bond, if provided, shall be issued to the Florida Department of Education and Purchasing School Districts with language that specifies coverage for compliance with all aspects of the contract, including any liquidated damages. The bidder shall be responsible for reviewing the bond's adequacy and ensuring it provides the coverage required by this contract. Failure of the bond to provide the required coverage shall not absolve the bidder of responsibility for the required level of financial and other obligations. The bond shall be provided from a reliable surety company, licensed to do business in Florida and acceptable to the Florida Department of Education. To be acceptable to the Florida Department of Education as surety for performance bonds, a surety company shall comply with the following provisions:

- 1) The surety company must be qualified to do business in the State of Florida.
- 2) The surety company shall have been in business and have a record of successful continuous operation for at least five years.
- 3) All bonds shall be signed by a Florida licensed resident agent who holds a current power of attorney from the surety company issuing the bond.

#### 5.3 INSURANCE, WORKERS' COMPENSATION

During the Contract term, the Contractor at its sole expense shall provide commercial insurance of such a type and with such terms and limits as may be reasonably associated with the Contract, which, as a minimum, shall be: workers' compensation and employer's liability insurance in accordance with Chapter 440 of the Florida Statutes, with minimum employers' liability limits of \$100,000 per accident, \$100,000 per person, and \$500,000 policy aggregate. Such policy shall cover all employees engaged in any Contract work.

Employers who have employees who are engaged in work in Florida must use Florida rates, rules, and classifications for those employees. In the construction industry, only corporate officers of a corporation or any group of affiliated corporations may elect to be exempt from workers' compensation coverage requirements. Such exemptions are limited to a maximum of three per corporation, and each exemption holder must own at least 10% of the corporation. Independent contractors, sole proprietors, and partners in the construction industry cannot be exempt and must maintain workers' compensation insurance.

#### 5.4 INSURANCE, GENERAL LIABILITY

The Contractor shall maintain, during the life of this agreement, a Comprehensive General Liability Insurance to protect him/her from claims of damage for personal injury, accidental death, and property damages while operating under this agreement. Any operations handled by himself/herself or by anyone directly or indirectly employed by him/her. The amount of such insurance shall have a minimum limit as follows:

 Contractor's Comprehensive General Liability Coverage, Bodily Injury & Property Damage - \$100,000 Each Occurrence, Combined Single Limit

The certificate(s) of insurance must comply with the following standards:

- No exclusions or restrictions in coverage will be accepted.
- The insurance coverage must be with an insurance company with a Best's rating of "A" or better.
- The certificate must include a thirty- (30) day notice of cancellation.
- The Department must be listed as an "additional insured" on coverage.

#### 5.5 **INDEMNIFICATION**

The contractor agrees to indemnify, hold harmless and defend, at his/her own expense (including reasonable attorney's fees), the Department and its employees against any all claims or suits for property loss or damage and/or personal injury including death, to any and all persons, of whosoever kind and character, whether real or asserted, arising out of and in connection with Contractor's negligence, intentional acts, or omissions related to its performance under the Contract.

#### 5.6 EMPLOYEE REQUIREMENTS

The contractor agrees that only authorized employees are allowed on the premises of the Department buildings. Contractor employees are not to be accompanied in their work area by acquaintances, family members, assistants, or any person unless said person is an authorized employee of the Contractor. All employees shall wear picture identification badges on clothing bearing the company emblem or name at all times.

#### 5.7 PARTICIPATION IN FUTURE STAGES OF THIS PROJECT

As stated in Chapter 287.057 F.S.

(19)(c) A person who receives a contract that has not been procured pursuant to subsections (1) through (3) to perform a feasibility study of the potential implementation of a subsequent agreement, who participates in the drafting of a solicitation, or who develops a program for future implementation, is not eligible to contract with

the agency for any other contracts dealing with that specific subject matter, and any firm in which such person has any interest is not eligible to receive such contract. This prohibition does not prevent a vendor who responds to a request for information from being eligible to contract with an agency.

#### 5.8 INFORMATION TECHNOLOGY REQUIREMENTS

Bidders submitting Bids to this solicitation should provide electronic and information technology resources in complete compliance with the accessibility standards required by Section 282.601-282.606, F.S., and Rule 60-8.002, F.A.C. These standards establish a minimum level of accessibility.

Contractors, providers, and partners employed by the Department or acting on behalf of the Department shall comply with Florida Administrative Code (F.A.C.) 60GG-2 and fully comply with all information technology security policies.

#### 5.9 SCRUTINIZED COMPANIES LISTS

Section 287.135, Florida Statutes, requires that at the time a company submits a bid or proposal for a contract for goods or services of \$1 million or more, the company must certify that the company is not on either the Scrutinized Companies with Activities in Sudan List or the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List. Both lists are created pursuant to section 215.473, Florida Statutes.

Bids of \$1 million or more should include the attached Scrutinized Companies Lists Form (Attachment '5') to certify the respondent is not on either of those lists. The Form should be submitted with the Technical Reply.

#### 5.10 SCRUTINIZED COMPANIES – TERMINATION

The Department may, at its option, terminate the Contract if the Contractor submitted a false certification, was placed on the Scrutinized Companies with Activities in Sudan List, the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List, engaged in business operations in Cuba or Syria, been placed on the Scrutinized Companies that Boycott Israel List, or is engaged in a boycott of Israel as provided under section 287.135(5), F.S.

## **SECTION 6 – SCOPE OF SERVICES**

#### 6.0 SCOPE OF SERVICES

Section 1006.27, F.S., states that the department shall assist district school boards in securing school buses at prices that are as reasonable as possible by providing a plan under which district school boards may voluntarily pool their bids for such purchases. In cooperation with the Florida Department of Management Services, the department has prepared and awarded term contracts for the purchase of various types of school buses and optional equipment, and made the contracts available to district school boards to facilitate this service.

#### 6.1 DELIVERABLES (Status Reports)

The successful bidder is required to furnish, on at least a monthly basis, a status report of all units ordered by eligible users from this bid or local purchasing agreements, following the format prescribed in Attachment 9 – File Structure for Required Status Report. This report shall be submitted electronically in the same format. These monthly status reports shall be sent to the Florida Department of Education, STMS, 834 Turlington Building, 325 West Gaines Street,

Tallahassee, Florida 32399-0400, emailed to <a href="mailto:schtrams@fldoe.org">SCHTRANS@fldoe.org</a> or uploaded directly to the online bus inventory application as directed by the department. This information shall be provided on an ongoing basis until all eligible users' units from this bid or local purchasing agreements are delivered. Failure to submit the reports as mentioned above on time and in the proper format may be considered when determining the bidder's fitness for the next bid.

As specified in Attachment 9 – File Structure for Required Status Report, a sample status report shall be provided with the bid response.

#### 6.2 FINANCIAL CONSEQUENCES (Liquidated Damages)

The contractor's failure to complete purchased school buses correctly and on time will result in substantial injury to purchasing school districts. Still, the amount of damages resulting from such injury cannot be calculated with certainty. Each failure to complete a school bus correctly and on time is hereinafter referred to as a default. Defaults shall be deemed corrected on the day that the school bus has been delivered in ready-to-use condition. "Ready-to-use" shall be defined as meeting all applicable specifications, with all equipment functioning properly and without substantive defects (as determined by the purchaser or the Florida Department of Education, STMS). For each default, the contractor shall be liable to the purchasing school district for liquidated damages, as set forth herein.

Buses not ready for pickup or not delivered to the purchasing school district (as specified by the purchaser) in ready-to-use condition by the dates specified in section 7.18 will be assessed liquidated damages of \$25 per bus, per calendar day that delivery is late for non-lift units and \$50 per bus, per calendar day that delivery is late for units equipped with wheelchair lifts.

#### a. Calculation of Liquidated Damages

Eligible users will be responsible for calculating, assessing, and collecting liquidated damages.

Delays in delivery caused by strikes at the bidder's or chassis manufacturer's plant, acts of God, or circumstances beyond the company's control are not cause for liquidated damages.

#### b. Collection of Liquidated Damages

Purchasing school districts and the FSDB will be permitted to deduct calculated liquidated damages for late delivery from the bus's payment. Purchasing school districts and the FSDB are required to notify the bidder, in writing, at least 30 days in advance of their intent to deduct liquidated damages in a specified amount and provide the bidder an opportunity to resolve or adjust the calculation of the damages prior to their assessment.

Language in this document takes precedence over any conflicting language in the attached General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

## SECTION 7 - SPECIAL INSTRUCTIONS - BID RESPONSE FORMAT & CONTENT

#### 7.0 BID RESPONSE SUBMISSION

Bid Responses are due as specified in **SECTION 3.3 SCHEDULE OF EVENTS**. Mail or deliver to:

Florida Department of Education
Bureau of Contracts, Grants and Procurement Management Services
Attn: Anita Wimberly
344 Turlington Building
325 West Gaines Street
Tallahassee, Florida 32399-0400

Bid Responses received after this time and date may not be considered. By submitting a Bid Response, the Bidder represents that it understands and accepts the terms and conditions to be met and the character, quality, and scope of services/commodities to be provided. All Bid Responses and associated forms should be signed and dated in ink by a duly authorized Bidder representative.

Each Bidder should fully acquaint itself with the conditions relating to performance requirements under these ITB conditions. All Bid prices should be submitted on the sheets provided in this ITB. All Bid prices must remain firm until December 31, 2025, unless equitably adjusted as described in sections 3.0 Intent or 7.15 Delivery Pricing Adjustment.

All Bid Responses and related documents submitted in response to this ITB shall become the property of the State of Florida.

#### 7.1 <u>BID CONDITIONS</u>

No conditions may be applied to any part of the ITB by the prospective Bidder. Any conditions placed on any aspect of the Bid documents by the prospective Bidder may result in the Bid Response being rejected as a conditional Bid. DO NOT WRITE IN CHANGES ON ANY ITB SHEETS. The only recognized ITB changes before Bid opening will be a written addendum issued by the Department.

#### 7.2 BID RESPONSE FORMAT INSTRUCTIONS

This section contains instructions that describe the format for the Bid Response. All Bid Responses submitted should be marked as follows:

BID NUMBER: ITB 2023-02

**COMPANY NAME** 

**CONTACT PERSON NAME AND PHONE** 

OPENING DATE/TIME: October 19, 2022 @ 10:15 AM EASTERN TIME.

The bidder should submit one original, one hard copy of the original, and one electronic copy of the complete bid response. Since the department will expect all bids to be in this format, a bidder's failure to follow this requirement may result in the rejection of a bid.

#### Section 1

Transmittal Letter

The bidder should provide a transmittal letter on company letterhead) that contains the following statements:

- A statement that the person signing the bid response is authorized to represent the bidder and bind the bidder relative to all matters contained in the bidder's bid response.
- Company's federal tax identification number.
- Company's DUNS number.
- A statement that the bidder has read understands and agrees to all provisions of this ITB. By submitting a bid, the bidder agrees to the terms and conditions of the ITB, notwithstanding any statement in the bid to the contrary.
- A statement that the bidder is authorized to conduct business in Florida. In lieu of such a statement, the bidder should alternatively represent that he/she will secure authorization to do business in Florida before contract execution.
- A statement that the bidder is registered on the <a href="MyFloridaMarketPlace">MyFloridaMarketPlace</a> Website. In lieu of such a statement, the bidder should alternatively represent that he/she will complete such registration authorization before contract execution.
- A statement that the bidder has electronically registered a valid W-9 with the Department of Financial Services (DFS). DFS is ready to assist any vendors with questions, and vendors must submit their W-9 forms electronically at <a href="https://flvendor.myfloridacfo.com">https://flvendor.myfloridacfo.com</a>. Contact the DFS at 850-413-5519 or <a href="fcluy@myfloridacfo.com">FLW9@myfloridacfo.com</a> with any questions.

• When applicable, the bidder should address small, minority, women, and service-disabled veteran business enterprise participation in the transmittal letter.

The Bidder is encouraged to limit the letter to no more than two pages.

#### Section 2

- Attachment 1 Vendor's Bid Pricing Sheets for base buses and options, each page signed or initialed
- Attachment 2 Disclosure Statement
- Attachment 3 Drug-Free Workplace Form
- Attachment 4 Minority Certificate
- Attachment 5 Scrutinized Companies Lists
- Attachment 6 Contract Standard Terms and Conditions
- Attachment 7 Bidder Representation
- Attachment 8 Purchase Order Preference/Customer Contact Preference Form
- Attachment 9 File Structure for Required Status Report
- Attachment 10 Pre-Delivery Inspection (PDI) Form
- Attachment 11 Florida School Bus Specifications, Effective January 2023
- Attachment 12 Letter representing that buses will meet all applicable Federal Motor Vehicle Safety Standards and representing the adequacy or Gross Axle Weight Ratings (GAWRs)
- Attachment 13 Letter representing that lift installation will be in compliance with Florida's specifications
- Attachment 14 Estimated delivery dates for Type A, C, and D chassis delivery supplied by the chassis manufacturer
- Attachment 15 Letter acknowledging the financial consequences as specified in section 6.2
- Attachment 16 Letter specifying the seat covering material manufacturer and model number
- Attachment 17 Letter stating that all Type C and D buses will meet chassis performance specifications
- Attachment 18 PDI program outline as specified in section 7.9
- Attachment 19 All addenda (if applicable; should be signed by an authorized company representative)

#### 7.3 GENERAL BID REQUIREMENTS

All terms and conditions as outlined, and specifications are given for school bus bodies and school bus chassis in Attachment 11 - Florida School Bus Specifications, Effective January 2023, are a part of this bid.

Language in this document takes precedence over any conflicting language in the General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

#### 7.4 ESTIMATED QUANTITIES

It is anticipated that eligible users will purchase approximately 1,000 total buses under contracts resulting from this bid. The types and total dollar figures from the previous two bids are as follow:

	BID #2022-01 (as of .	June 6,2022)	BID #2020-16		
TYPE	# PURCHASED	TOTAL DOLLARS	# PURCHASED	TOTAL DOLLARS	
Α	2	\$157,976	0	\$0	
С	184	\$26,422,588	1,912	\$223,218,993	
D	0	\$0	14	\$2,050,250	
Total	186	\$26,580,564	1,926	\$225,269,243	

NOTE: These figures are provided only as a guideline for preparing your bid and should not be construed as representing actual figures under the contract.

#### 7.5 DEALER-OFFERED OPTIONS AND SALES INCENTIVES

Occasionally, a customer may request a vehicle option that is not included in this contract. Additional dealer-offered options may NOT be offered after the bid opening.

Bidders are prohibited from offering sales incentives not specifically included within this ITB, such as rebates, parts credits, extended warranties, etc. Bidders shall also notify component, equipment and service suppliers that they may not offer such incentives and notify the STMS immediately if they become aware of any such offers or transactions. Liquidated damages of \$2,000 for each violation will be enforced, and violators may be removed from the bidder's list.

#### 7.6 ORDERING INSTRUCTIONS

The purchasing entity must submit purchase orders directly to the awarded bidder, who will report all orders to the Florida Department of Education via the required monthly status report.

#### 7.7 TECHNICAL DOCUMENTATION

All products bid must meet or exceed all conditions and specifications of the ITB. When the STMS requires technical documentation, its purpose is to demonstrate compliance of the product bid with applicable technical requirements of the ITB or to allow a technical evaluation of the product. The STMS may, at its discretion, determine the technical acceptability of the products offered through the use of any technical documentation available within the STMS as of the date and time of bid opening and evaluation. Such authority of the STMS shall in no way relieve the bidder from the ultimate responsibility to provide any required technical documentation, nor shall any bidder assume that such documentation is otherwise available to the STMS. The state shall not be responsible for the accuracy of the technical documentation in its possession.

#### 7.8 PILOT MODEL INSPECTIONS

The successful bidder is responsible for providing a pilot model of each size and type bus awarded for inspection by representatives of the STMS. The pilot model inspection may take place at the assembly plant or other inspection facility. Units equipped with wheelchair lifts shall be made available for pilot inspection first. The successful bidder shall incur expenses associated with travel and per diem for the pilot model inspection for up to two persons from the STMS and one representative from each school district that purchased one or more buses included in the pilot inspection. If a representative of the purchasing school district is not available for the pilot model inspection, a member of the Florida Association for Pupil Transportation (FAPT) Specifications Committee may substitute upon request. If specifications or quality problems are noted as part of the initial inspection, or if some equipment cannot be inspected during the initial pilot inspection. The STMS reserves the right to require the bidder to pay all costs involved for two persons selected by STMS to conduct a follow-up inspection at the assembly plant. Alternatively, such follow-up inspection may be required in Tallahassee, Florida, as determined by the department. Regular production of school buses shall not be scheduled until specifications and quality have been determined to meet Florida school bus requirements.

#### 7.9 PRE-DELIVERY INSPECTIONS

Bidders will be required to perform and document a Florida-specific pre-delivery inspection of each unit prior to delivery to the purchasing school district. This inspection shall include all items and be documented on the Pre-Delivery Inspection (PDI) form included in Attachment 10 of this document. These inspections shall be conducted by bidder representatives trained and certified as Florida school bus inspectors by the department. Inspector training and certification will be provided by the department at each bidder's expense. It is each bidder's responsibility to ensure that all components of his/her products are properly inspected and documented.

A completed copy of the PDI form shall accompany each unit delivered for district verification. Any items found to be missing; inoperative; out of compliance with Florida specifications; out of compliance with the criteria outlined in the Florida School Bus Safety Inspection Manual; or of poor fit, finish, or quality shall be repaired and replaced before delivery to the purchasing school district.

The department and/or purchasing district personnel may also conduct random post-delivery inspections on units previously inspected by the bidder or manufacturer. Such units may be inspected with little or no notice to the bidder at the assembly plant or other inspection facility at no expense to the bidder.

#### 7.10 CONTRACT

The department's contract for Type A, Type C, and Type D school buses and optional equipment is incorporated in this ITB as Attachment 6. The contract may be executed with a responsive and responsible bidder who submits price quotes within 10 percent of the lowest price configuration. The contract will govern the relationship between the contractor and the department. If there is a conflict between the requirements of this ITB and those of the contract, the requirements as stated in the ITB shall apply. When bid calculations are successfully concluded, a written contract will be executed to incorporate the following documents as each was changed or affected by the calculation. The order of priority in the event of conflicts between contract documents is:

- Addenda to this ITB
- This ITB
- Department contract
- Award letter
- Contractor's response

#### 7.11 VARIATION OR SUBSTITUTION OF EQUIPMENT

Substitution of equipment on which information or pricing are specifically requested as part of this ITB will not be allowed. Liquidated damages of \$2,000 for each violation will be enforced, and violators may be removed from the list of qualified bidders. Liquidated damages will be deposited in the Education Trust Fund.

Language in this document takes precedence over any conflicting language in the attached General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

#### 7.12 MYFLORIDAMARKETPLACE

There is a <a href="MyFloridaMarketPlace">MyFloridaMarketPlace</a> (MFMP) fee for school buses purchased under this contract, the bidder may pass the cost on to the purchasing entity by incorporating the fee into their bid pricing; however, the purchasing entities should NOT be invoiced for the vendor's MFMP fee. Vendors shall not process purchase orders which include the vendor's MFMP fee. This cost will NOT be factored into the bid award calculation.

#### 7.13 CONTACT BETWEEN CONTRACTOR AND THE DEPARTMENT AFTER AWARD OF CONTRACT

The following staff member from the department will be assigned to be the project manager and will be responsible for the implementation of the contract resulting from this ITB:

Robert Manspeaker, Director School Transportation Management Section

Florida Department of Education, 325 West Gaines Street, #834 Tallahassee, Florida 32399-0400

Telephone: 850-245-9795

Email: Robert.Manspeaker@fldoe.org

PURSUANT TO SECTION 287.057(25), FLORIDA STATUTES: RESPONDENTS TO THIS SOLICITATION OR PERSONS ACTING ON THEIR BEHALF MAY NOT CONTACT, BETWEEN THE RELEASE OF THE SOLICITATION AND THE END OF THE 72-HOUR PERIOD

FOLLOWING THE AGENCY POSTING THE NOTICE OF INTENDED AWARD, EXCLUDING SATURDAYS, SUNDAYS, AND STATE HOLIDAYS, ANY EMPLOYEE OR OFFICER OF THE EXECUTIVE OR LEGISLATIVE BRANCH CONCERNING ANY ASPECT OF THIS SOLICITATION, EXCEPT IN WRITING TO THE PROCUREMENT OFFICER OR AS PROVIDED IN THE SOLICITATION DOCUMENTS. VIOLATION OF THIS PROVISION MAY BE GROUNDS FOR REJECTING A RESPONSE.

The bidder shall designate at least one contract manager with responsibility to the State of Florida, who should remain readily available by telephone, cellular phone, or email for unresolved contract concerns and be responsible for managing said concerns with the assembly plant, dealer, or other entity, as appropriate. The bidder's contract manager and complete contact information shall be included in the transmittal letter.

#### 7.14 <u>TERMINATION FOR CAUSE</u>

The department reserves the right to immediately terminate the contract by providing written notice to the contractor if the department determines any of the following has occurred:

- Contractor fails to perform to the department's satisfaction any material requirement of the contract; or
- The action or inaction of the contractor substantially endangers the contractor's execution, or such occurrence can be reasonably anticipated.

#### 7.15 DELIVERY PRICING ADJUSTMENT

Following Form PUR 1000, item 4(e), the department shall make an equitable adjustment in the contract terms for delivery pricing related to (increase/decrease) costs of diesel fuel based on the U.S. Energy Information Administration Annual Fuel Price <a href="https://www.eia.gov/dnav/pet/pet\_pri\_gnd\_dcus\_nus\_a.htm">https://www.eia.gov/dnav/pet/pet\_pri\_gnd\_dcus\_nus\_a.htm</a>. The price adjustment (increase/decrease) will be made after the first 12 months of the contract, calculated using the annual fuel price for U.S. No.2 Diesel Ultra Low Sulfur (0-15 ppm) Retail Price (Dollars Per Gallon). The beginning price for calculation purposes will be the 2022 calendar year price. Price adjustment will be made effective on February 1 of each subsequent contract year. The price adjustment calculation shall be made as follows. The advertised annual fuel price divided by the previous annual fuel price will determine the FACTOR to be multiplied by the base bid delivery cost per region. EXAMPLE: Delivery Cost =\$1500. Fuel price for 2021= \$3.287. Fuel price for 2020= \$2.551. (3.287/2.551=1.289) The delivery cost of \$1,500 x FACTOR of 1.289 = \$1,933 for a price increase of 28.87%. All prices are rounded to the nearest whole dollar amount. Prices will be calculated by the department and published on the school transportation web page at <a href="https://www.fldoe.org/schools/healthy-schools/transportation/">https://www.fldoe.org/schools/healthy-schools/transportation/</a> in the published price and ordering guide for this contract.

NOTE: upcharges for alternate fuel vehicle deliveries will not be adjusted.

#### 7.16 RECALL NOTIFICATIONS

The National Traffic and Motor Vehicle Safety Act (originally enacted in 1966 and now recodifies as 49 U.S.C. Chapter 301) gives the United States Department of Transportation's National Highway Traffic Safety Administration (NHTSA) the authority to issue vehicle safety standards and to require manufacturers to recall vehicles that have safety-related defects or do not meet federal safety standards. Successful bidders will be responsible for ensuring that the department is notified of all NHTSA safety recalls related to vehicles purchased from contracts resulting from this invitation to bid. Such notification shall include an electronic list of affected vehicles in either Microsoft Excel or Access format. Other electronic formats may not be substituted without prior approval.

#### 7.17 TIMELINES

Purchase orders will be accepted from January 1, 2023, through December 31, 2025. The required delivery date will be 365 days from the date the bidder or bidder's representative(s) receive the purchaser's electronic purchase order notification. (Electric school buses are excluded from this delivery schedule requirement. However, school districts may negotiate a delivery schedule for electric school buses on an individual basis).

Bidder must furnish a schedule showing the cost of delivery of each completed unit from the manufacturing plant to Florida's county seats by region, as requested on the attached sheet. This data shall be used in determining the successful bidder. Any purchaser may elect to accept delivery of the buses included in the order at the factory. When the bidder delivery is specified, the bidder shall deliver buses to the applicable district or agency's central school bus garage or main office of a purchasing private school. The school bus bidder must contact purchasers opting to deliver their completed bus(es) to schedule final delivery five business days prior to the delivery of their completed units. Deliveries shall be scheduled between 8 a.m. and 5 p.m., Monday through Friday, excluding holidays.

Language in this document takes precedence over any conflicting language in the attached General Contract Conditions (Form PUR 1000) and General Instructions to Respondents (Form PUR 1001).

#### 7.18 ESTIMATED DELIVERY DATES

For all buses bid as complete units for which chassis and bodies are to be built by separate manufacturers, the bidder shall be responsible for securing from the chassis manufacturer estimated delivery dates for the completed chassis to the body plant, based upon the chassis ordering timelines specified or required to meet the completed unit delivery timelines called for in this request for bids. Estimated delivery dates should be submitted as part of the bid response package.

#### 7.19 REPRESENTATIONS

As part of this bid, each bidder should represent in a letter to be included with the bid that each unit sold by the bidder's company or representative for school buses will meet Attachment 11 - Florida School Bus Specifications, Effective January 2023; National School Transportation Specifications and Procedures, Revised 2015; and all applicable Federal Motor Vehicle Safety Standards.

This letter should also represent that the chassis furnished will have adequate gross axle weight ratings (GAWRs), front and rear, for mounting and representing bodies meeting Florida School Bus Specifications. The letter should be submitted as part of the bid response.

If a Type A or C bus is manufactured by separate chassis and body manufacturers. In that case, each bidder should represent by letter all specifications as required in the paragraph above.

As per Attachment 11 - Florida School Bus Specifications, Effective January 2023, for wheelchair lifts and installations, the successful bidder will be required to comply with all applicable design testing on the installed lift. A letter indicating such compliance will be required before buses equipped with wheelchair lifts may be delivered.

The bidder should submit with the bid written representation that the lift will be installed according to the lift manufacturer's specifications and Florida specifications.

Please include as part of your bid an attachment providing information on the seat covering material to be supplied on buses sold via the bid. This information should include the company's name supplying the material and the name or number designation for the material.

NOTE: The seat covering material as bid must be provided throughout the term of the bid and may not be subject to substitution or change.

#### 7.20 FLOOR PLAN (ORDER CONFIRMATION)

Upon receipt of the purchase order(s), the bidder shall provide the purchaser one line drawing for every configuration ordered. The line drawing will inform the purchaser of the unit's floor plan, including air-conditioning evaporator locations, and serve as bidder confirmation of the order.

#### 7.21 WHEELCHAIR LIFT BUS (WLB) REQUIREMENTS

Florida School Bus Specifications require wheelchair lift school buses to be offered with wheelchair lifts mounted in front of and behind the rear wheels, except for body sizes. Both locations are not available. WLB seating capacity shall be based on the maximum regular student seating that can be accommodated with the standard three wheelchair spaces per bus (see specifications for wheelchair space dimensions, minimum aisle width, barrier requirements, and other pertinent WLB specifications), as follows:

<u>NOTE</u>: Maximum available regular student seating shall be made available with the specified number of wheelchair spaces, whenever possible, consistent with specifications (usually with wheelchair spaces rearward and 39-inch seats forward). 29-capacity Type C wheelchair lift buses must be bid with an extra body section or spacing, as required, to ensure availability with the lift mounted behind the rear wheels.

- **TYPE A1 WLBs**, 19-29 capacity Net 1 in a wheelchair, maximum number available in regular seats.
- **TYPE A2 WLBs,** 30-47 capacity Net 2 in wheelchairs, maximum number available in regular seats.
- TYPE C WLBs, 29-77 capacity Net 3 in wheelchairs, maximum number available in regular seats.
- **TYPE D WLBs**, all sizes Net 3 in wheelchairs, maximum number available in regular seats.

#### 7.22 TRAINING, EQUIPMENT AND PUBLICATION REQUIREMENTS

#### A. Wheelchair Lift and Body Service Training

The successful bidder "shall be responsible for providing or arranging wheelchair lift service training as needed." This training shall include, at a minimum, one-day training seminars on overall features, operation, preventive maintenance, diagnosis, and rebuild of wheelchair lifts offered through the bid. The seminars are to be conducted free of charge at district garage locations. At least one seminar on each given lift model shall be conducted per five school districts purchasing a bus or buses equipped with that lift. The successful bidder shall also be responsible for providing eight one-day body service training seminars in conjunction with the Florida Summer Technicians Workshop (or equivalent, as determined by the STMS).

#### B. Chassis/Engine Training

The successful bidder of Type A, C, and D school buses shall provide chassis service training as needed. These seminars are to be conducted free of charge at district garage locations. This training shall include, at a minimum, one-day training seminars on overall features, tune-up, diagnosis, and preventive maintenance of diesel engines or other major chassis components offered through this bid (at the discretion of the STMS). At least one seminar on each given diesel engine model or other major components shall be conducted per four school districts purchasing a bus or buses equipped with that engine or componentry. Additionally, the bidder will be responsible

for providing eight days of training in conjunction with the Florida Summer Technicians Training seminar. Training to be supplied by the bidder shall include provisions for providing and transporting to each location a live training engine or other components, training aids, and student handouts pertinent to the instruction. The STMS may assist in organizing the training.

#### C. Air-Conditioning

The successful Type C and D bus bidder shall be responsible for providing or arranging air-conditioning training as needed. The training seminars are to be conducted free of charge at district garage locations. This training shall include, at a minimum, one-day training seminars on overall features, operation, preventive maintenance, diagnosis, and repair of optional air-conditioning systems offered through the bid. At least one seminar on each given air-conditioning manufacturer's system shall be conducted per five school districts purchasing a bus or buses equipped with that optional air-conditioning system. The successful bidder shall also be responsible for providing eight days of training in conjunction with the Florida Summer Technicians Training seminar.

#### D. Service Manuals

The successful Type C and D bus bidder is responsible for providing each school district purchasing one or more units before or concurrent with the delivery of buses one service manual per shop location, giving complete coverage of models purchased, including chassis and bodies. The service manuals shall contain all instructions, pictures, and line drawings necessary for the maintenance, repair, and rebuilding of all chassis, power train, antilock, air or hydraulic brake system components, and body components. Chassis manuals shall include complete coverage of the engine, including all rebuild and service procedures. The service manuals shall contain all instructions, pictures and line drawings necessary to maintain, repair, and rebuild all body components. This requirement may be fulfilled via a portable electronic storage medium or online access to an Internet site with the required information.

#### E. Parts Manuals

The successful bidder is responsible for providing each school district purchasing one or more units before or concurrent with the delivery of buses one parts catalog per shop location, giving complete coverage of models purchased, including chassis and bodies. Parts manuals shall include part numbers and illustrations that allow easy identification of component and sub-component parts. This requirement may be fulfilled via a portable electronic storage medium or online access to an Internet site with the required information.

Delivery of service and parts manuals, or electronic access thereto, shall be confirmed to the STMS no later than five business days after delivery of the buses. Failure to provide the manuals, electronic files, or Internet access within five business days of bus delivery may be considered when determining the bidder's fitness for the next bid. Internet access to a manual or at least one representative set of manuals or compact disks shall also be provided to the STMS.

#### 7.23 SERVICE REQUIREMENTS

When inadequate dealer support, lack of parts availability, or other factors result in downtime of a bus(es) due to chassis, body, or component problems subject to coverage under the warranties required via this bid. The Florida Department of Education, STMS, shall reserve the right to determine when downtime has become excessive. Downtime (for each given service problem) of five business days or fewer (consecutive or otherwise) shall not be deemed excessive for these provisions. When the STMS has determined that downtime is excessive, the STMS shall reserve the right to require on-site or other distributor or factory-level service representation and assistance as needed to resolve the problem. Items delivered not conforming to specifications may be rejected and returned at the vendor's expense. These items and items not delivered as per delivery dates specified in the bid may result in the bidder being found in default. In this event, all re-procurement costs may be charged against the defaulting contractor. Any violation of these stipulations may also result in the cancellation of this contract in whole or in part with 30 days prior notice in writing and the supplier's name being removed from the state purchasing vendor mailing list.

#### 7.24 MANUFACTURER'S CERTIFICATE OF ORIGIN

Florida law requires a second-stage manufacturer's certificate of origin (MCO) if one manufacturer builds a chassis, then delivered it to another manufacturer to manufacture a complete vehicle. The successful bidder is responsible for providing this second-stage MCO for all Type A and C units if a different first-stage manufacturer builds chassis for these units. Additionally, the successful bidder is also responsible for providing a second-stage MCO for Type D units if other manufacturers produce the chassis and body. The successful bidder of Type C and D units built by the same manufacturer as a complete unit (chassis and body) shall supply a single MCO.

#### 7.25 ALTERNATIVE FUEL ENGINE OPTION

Bidders who can provide a compressed natural gas (CNG), liquid propane (LP), electric school bus (ESB) or plug-in hybrid electric vehicle, fuel cell or diesel/electric hybrid-powered school bus should include pricing on the optional alternative engine pricing sheet. The price should reflect ALL additional costs associated with this option. Please include or attach a summary explanation of modifications, if any that would be required for the alternative fuel engine option. Optional alternative fuel configurations may not be offered in lieu of the required base diesel engine configuration as described on page II-2 of the Florida School Bus Specifications, Effective January 2023.

#### 7.26 DISCLOSURE OF ACCIDENT(S) OR MECHANICAL BREAKDOWN

If a school bus is involved in an accident or has experienced a mechanical breakdown before delivery. In that case, bidders must disclose such information to the purchasing school district or FSDB upon delivery.

### **SECTION 8 – SUBMITTALS AND EVALUATION**

#### 8.0 PRELIMINARY SUBMITTAL REVIEW

The absence of any of these documents may deem the Bid Response non-responsive, and the Bid Response may not be evaluated. The bid forms furnished should be used when submitting the response. Forms should be filled out in ink or typewritten, SIGNED AND DATED with no alterations or amendments made, and enclosed with a signed transmittal letter. Preliminary submittal review information should consist of the following:

#### Section 1

Transmittal Letter (completed on company letterhead)

#### Section 2

- Attachment 1 Vendor's Bid Pricing Sheets for base buses and options (each page signed or initialed).
   BIDDER SHOULD USE THIS FORM WHEN SUBMITTING THEIR RESPONSE. USE OF ANY OTHER FORM MAY DISQUALIFY THE BID RESPONSE.
- Attachment 2 Disclosure Statement
- Attachment 3 Drug-Free Workplace Form
- Attachment 4 Minority Certificate
- Attachment 5 Scrutinized Companies Lists
- Attachment 6 Contract for Type A, Type C and Type D School Buses and Optional Equipment.
- Attachment 7 Bidder Representation
- Attachment 8 Purchase Order Preference/Customer Contact Preference Form
- Attachment 9 File Structure for Required Status Report
- Attachment 10 Pre-Delivery Inspection (PDI) Form
- Attachment 11 Florida School Bus Specifications, Effective January 2023
- Attachment 12 Letter representing that buses will meet all applicable Federal Motor Vehicle Safety Standards and representing the adequacy of Gross Axle Weight Ratings (GAWRs)
- Attachment 13 Letter representing the power lift installation will be in compliance with Florida's specifications
- Attachment 14 Estimated delivery dates for Type A, C, and D chassis delivery (supplied by chassis manufacturer)
- Attachment 15 Letter acknowledging liquidated damages, as specified in section 6.2
- Attachment 16 Letter specifying the seat covering material manufacturer and model number
- Attachment 17 Letter stating that all Type C and D buses will meet chassis performance specifications
- Attachment 18 PDI program outline as specified in section 7.9
- Attachment 19 Bid Addenda
- Attachment 20 Standard Terms and Conditions

The bidder should submit one original, one hard copy of the original, and one electronic copy of the complete bid response. Since the department will expect all bids to be in this format, a bidder's failure to follow this requirement may result in the rejection of a bid.

#### 8.1 POSTING OF BID TABULATION

The Bid Tabulation will be posted at the Department's Bureau of Contracts, Grants and Procurement Management Services, 344 Turlington Building, 325 West Gaines Street, Tallahassee, Florida, and on the VIP as specified in **SECTION 3.3 SCHEDULE OF EVENTS**, and will remain posted for seventy-two (72) hours.

#### 8.2 PROTEST OF BID TABULATION OR PROCUREMENT TERMS

Any Bidder who is adversely affected by the Department's recommended award or intended decision must file a written "Intent to Protest" with the Department at the address of posting. See **SECTION 4.4 PROCUREMENT PROTESTS/NOTICE OF RIGHTS** for protest information.

#### 8.3 INABILITY TO POST

If the Department is unable to post as defined above, the Department will notify all Bidders by posting a notice on the VIP. The Department will provide written notification via the VIP of any future posting in a timely manner.

#### 8.4 AWARD OF THE CONTRACT

Services will be authorized to begin when the contractor receives a fully executed contract from the department's project manager, and the department receives the contractor's performance bond.

#### 8.5 SUBMISSION OF ALTERNATE RESPONSES

A company, its subsidiaries, affiliates, and related entities should submit only one response. Submission of more than one response may cause the rejection of all responses submitted. In the alternative, the department may decide, in its sole discretion, which response to evaluate and consider. A company may not propose to serve as the prime contractor in one response and as a subcontractor in a different response.

## **ATTACHMENT '1'**

### **VENDOR'S BID SHEET**

\*\*PLACEHOLDER FOR EXCEL PRICE SHEETS\*\*

## **ATTACHMENT '2'**

### **DISCLOSURE STATEMENT**

(Rev. 07/02)

PARTNERSHIP OR INDIVIDUAL			
hereby certify that I, if an individual,	or each of us, if a partnership, doing b	usiness as	
	ever engaged in any private business vent Commissioner of Education, any Associa		
above designated persons or any other appointment of	rtner, if a partnership, nor anyone acting ir employee of the Florida Department of Ed	lucation exert any influ	
(Name of Individual	or Partnership)		
		(1)	
		( /	Signature
			Signature
			Signature
COMPANY OR CORPORATION  I hereby certify that neither I nor any	owner, officer, director, or shareholder	of	, a ration (Company))
	(2) corporation, licensed to do busi		
	venture or enterprise, directly or indirectly ate Commissioner of Education, Division I		
corporation or any of its owners, officers	ner, officer, director, or shareholder of this s, directors, or shareholders has requested Education exert any influence to secure the	that any of the above	designated persons or any
(Company)	(Corporation)	under this propo	seu agreement.
		(3)	
			Signature
	•		Title

- (1) If a partnership, each partner must sign & execute.
- (2) If the company is not incorporated, insert "not incorporated" in this space.
- (3) If incorporated, this statement is to be executed by the same person who will execute the contract, if awarded.

### **ATTACHMENT '3'**

#### DRUG-FREE WORKPLACE

(will be considered in case of identical tie Bids)

Preference shall be given to businesses with drug-free workplace programs. Whenever two or more Bid Responses which are equal with respect to price, quality, and service are received by the State or by any political subdivision for the procurement of commodities or contractual services, a Bid Response received from a business that certifies that it has implemented a drug-free workplace program shall be given preference in the award process. Established procedures for processing tie Bid Responses will be followed if none of the tied vendors have a drug-free workplace program. To have a drug-free workplace program, a business shall:

- 1) Publish a statement notifying employees that the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance is prohibited in the workplace and specifying the actions that will be taken against employees for violations of such prohibition.
- 2) Inform employees about the dangers of drug abuse in the workplace, the business's policy of maintaining a drug-free workplace, any available drug counseling, rehabilitation, and employee assistance programs, and the penalties that may be imposed upon employees for drug abuse violations.
- 3) Give each employee engaged in providing the commodities or contractual services underbid a copy of the statement specified in subsection (1).
- 4) In the statement specified in subsection (1), notify the employees that, as a condition of working on the commodities or contractual services that are underbid, the employee will abide by the terms of the statement and will notify the employer of any conviction of, or plea of guilty or nolo contendere to, any violation of Chapter 893 or any controlled substance law of the United States or any state, for a violation occurring in the workplace no later than five (5) days after such conviction.
- 5) Impose a sanction on, or require satisfactory participation in a drug abuse assistance or rehabilitation program if such is available in the employee's community by any employee who is so convicted.
- 6) Make a good faith effort to maintain a drug-free workplace through implementation of this section.

As the person authorized to sign the statement, I certify that this firm complies fully with the above requirements.

Vendor's Signature

#### ATTACHMENT '4'

# STATE OF FLORIDA DEPARTMENT OF EDUCATION MINORITY SUBCONTRACTORS UTILIZATION SUMMARY

The Department's Supplier Diversity initiative strives to ensure the promise of Florida's future is shared by all of its residents, regardless of race, ethnicity, disability, neighborhood, or background. To that end, the Department is dedicated to support, track and increase its small, minority-, women-, and service-disabled veteran business enterprise spending with prime contractors and subcontractors. This form was developed to assist in these efforts.

The Prime Contractor shall report all small, minority-, women-, and service-disabled veteran business enterprise Subcontractors, identifying the Name, Address, Type of Certification, and Dollar Amount on the form below. The Prime Contractor shall submit this form with each invoice submitted for payment, whether or not funds have been spent with a small, minority-, women-, and service-disabled veteran business enterprise Subcontractor for the period covered by the invoice. The Office of Supplier Diversity, Florida Department of Management Services will assist in furnishing names of qualified minorities. The Office of Supplier Diversity can be reached at (850/487-0915); the Internet Web address is <a href="http://dms.myflorida.com/other-programs/office-of-supplier-diversity-osd">http://dms.myflorida.com/other-programs/office-of-supplier-diversity-osd</a>.

PRIME CONTRACTOR:				
CONTRACT NO.:				
CONTRACT TITLE:				
MBE CONTRACTORS Full Name, Address, Telephone Number	State Certified	Non- Certified	Non-Profit	Dollar Amount
Certified True and Correct by:	S	Total Alubmit Report to	mount \$ o:	
Prime Contractor	В	ls. ReGina Reg ureau of Contra 25 West Gaine	acts, Grants & l	
Title		allahassee, Flo	,	
Date				

For additional information, you may call Ms. Register at 850/245-9173 or email regina.register@fldoe.org

## **ATTACHMENT '5'**

# VENDOR CERTIFICATION REGARDING SCRUTINIZED COMPANIES LISTS

Respondent Vendor Name:	
Vendor FEIN:	
Vendor's Authorized Representative Name and Title:	
Address:	
City: State:	Zip:
Phone Number:	<u> </u>
Email Address:	
Section 287.135, Florida Statutes, prohibits agencies from \$1,000,000 on either the Scrutinized Companies with Ac Activities in the Iran Petroleum Energy Sector List. Both lists As the person authorized to sign on behalf of Respondent section entitled "Respondent Vendor Name" is not listed on List or the Scrutinized Companies with Activities in the Iran to section 287.135, Florida Statutes, submitting a false certifiees, and costs.	ctivities in Sudan List or the Scrutinized Companies with s are created pursuant to section 215.473, Florida Statutes.  It, I hereby certify that the company identified above in the n either the Scrutinized Companies with Activities in Sudan Petroleum Energy Sector List. I understand that pursuant
Certified By: Who is authorized to sign on behalf of the above referenced Authorized Signature Print Name and Title:	d company.

### **CONTRACT 2023-02ATTACHMENT '6'**

THIS CONTRACT FOR TYPE A, TYPE C AND TYPE D SCHOOL BUSES AND OPTIONAL EQUIPMENT, BID NO: IT 2023-02, by and between the department, 325 West Gaines, Suite 834, Tallahassee, Florida 32399-0400, and
, the contractor, for-profit corporation registered in Florida, each referred to herein as "Party," and collectively referred to as the "Parties,"
WITNESSETH:
WHEREAS, the Department desires to provide eligible users, defined herein, with various Type A, Type C and Type School Buses and Optional Equipment (defined herein as "Vehicles"), through the use of a state term contract pursuant rule 60A-1.001, F.A.C.; and section 1006.27, F.S., and
WHEREAS, the Department solicited responses to an Invitation to Bid No: ITB 2023-02(ITB) to prospective contractors as and Vehicles; and
WHEREAS, the contractor responded to the ITB and desires to provide said Vehicles; and, unto each other;  NOW THEREFORE, in consideration of the premises, terms and conditions set forth herein, the Parties execute this contrasso same becomes binding and enforceable by and through the Parties and their assigns, and agree heretofore:
SCOPE OF WORK
The intent of these specifications is to set forth and convey to prospective bidders the general type, character, performance and quality of the Vehicles desired by the Department and school districts. The contractor is authorized to provide Vehicles to any and all eligible users in the State of Florida. The Parties agree that the laws and rules that apply to this contract shad be for those applicable to contracts in excess of Category Two, or \$35,000, as defined in chapter 287.017, F.S.
Pursuant to Section 7.10 of Bid No: ITB 2023-02, the following documents are hereby incorporated by reference:
■ Department contract
<ul><li>Any addenda to Bid No: ITB 2023-02</li><li>ITB No: 2023-02</li></ul>
Award Letter
<ul> <li>Contractor's response</li> </ul>
IN WITNESS WHEREOF, the Parties hereto have caused this contract For Type A, Type C and Type D School Buses are Optional Equipment, Bid No: ITB 2023-02, to be executed on the dates shown below their respective signatures.
DEPARTMENT CONTRACTOR
Signature Signature
Olymature Signature
Print Name: Print name:
Tille.

Date:\_\_\_\_\_

Date:\_\_\_\_\_

#### **ATTACHMENT 7 - BIDDER REPRESENTATION**

TO: Commissioner Manny Diaz, Jr. Florida Department of Education Tallahassee, Florida 32399-0400

I, the bidder, hereby represent that the specifications of school bus equipment furnished under terms of this bid will comply with the *National School Transportation and Procedures, Revised 2015*, and the *Florida School Bus Specifications, Effective January 2023*, as represented by the manufacturer to the Commissioner of the Florida Department of Education, State of Florida.

#### NOTES:

- 1. Do not include excise tax in price schedule. A tax exemption certification or number will be furnished by the purchasing agency.
- 2. All prices must be quoted in even dollar amounts.
- 3. Twenty-nine capacity Type C buses shall be offered with both front-mounted and rear-mounted lift availability.
- All standard and optional tires bid shall be all-wheel position highway rib radials.

  Comments regarding production schedules and remarks (for informational purposes only):

  Company:

  By:

Address:

FEIN: \_\_\_\_\_\_\_

Signature:	Date:

### ATTACHMENT 8 - PURCHASE ORDER/CUSTOMER CONTACT PREFERENCE INFORMATION

Please provide pertinent contact information for your company to be used on all purchase orders for buses purchased pursuant to this bid:

ATTN (Contact Person's Name):
Contact Person's Title:
Company Name:
Street Address:
City, State, Zip:
Telephone:
CUSTOMER CONTACT PREFERENCE INFORMATION
Please indicate the proper contact person for all inquiries related to bus orders:
Contact Person's Name:
Contact Person's Title:
Company Name:
Street Address:
City, State, Zip:
Telephone:
Fax:
Email address.

## ATTACHMENT 9 - FILE STRUCTURE FOR REQUIRED STATUS REPORT

COLUMN	FORMAT TYPE	FIELD NAME
Α	NUMBER	DISTRICT NUMBER
В	TEXT	DISTRICT NAME
С	TEXT	BUS OWNED BY? (DISTRICT INPUT)
D	TEXT	NAME OF OWNER: CHARTER/CONTRACTOR (DISTRICT INPUT)
E	NUMBER	BUS NUMBER
F	TEXT	BUS TYPE
G	NUMBER	BUS YEAR MODEL
Н	TEXT	BUS SERVICE SCHEDULE (DISTRICT INPUT)
I	NUMBER	SHELL DESIGN CAPACITY
J	NUMBER	EQUIPPED SEATING CAPACITY
K	NUMBER	WHEEL CHAIR CAPACITY
L	TEXT	SHOP LOCATION (DISTRICT INPUT)
М	TEXT	CHASSIS MFG
N	TEXT	CHASSIS MODEL
0	TEXT	VIN#
Р	TEXT	FUEL TYPE: DIESEL, PROPANE, CNG, GASOLINE, ELECTRIC, HYBRID
Q	TEXT	ENGINE MODEL
R	TEXT	ENGINE SERIAL NUMBER
S	TEXT	TRANS MODEL NUMBER
T	TEXT	TRANS SERIAL NUMBER
U	TEXT	BODY MFG
٧	TEXT	BODY MODEL
W	TEXT	BODY SERIAL NUMBER
Х	TEXT	SEAT BELT TYPE
Υ	TEXT	A/C EQUIPPED
Z	TEXT	A/C MFG
AA	TEXT	A/C MODEL NUMBER
AB	TEXT	LIFT EQUIPPED?
AC	TEXT	LIFT MFG
AD	TEXT	LIFT MODEL NUMBER
AE	TEXT	LIFT SERIAL NUMBER
AF	TEXT	BID CONTRACT NUMBER
AG	DATE	BUS ORDER DATE
АН	TEXT	TO BE (D) DELIVERED OR (PU) PICKED-UP
Al	DATE	BUS BUILD DATE
AJ	DATE	EST DEL DATE
AK	TEXT	DEL STATUS
AL	DATE	DATE OF DELIVERY
AM	DATE	IN-SERVICE DATE
AN	NUMBER	ODOMETER MILES AT DATE OF DELIVERY
AO	TEXT	EXTENDED WARRANTY
AP	NUMBER	TOTAL COST WITH OPTIONS AND DELIVERY

**NOTE**: File shall be a Microsoft Excel spreadsheet.

## BID NO: ITB 2023-02

## TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT

## **Attachment 10 Pre-delivery Inspection Form (2023-02)**

District:	Local Bus #:	Local Bus #: Date Rec'd.:		Shop Location:			
Bus Ty <sub>l</sub>	pe:[A][B][C][D-Front Engine][D-Rear t	Engine ] Shell Seating Cap	oacity:	Equip	ped Seating Capacity:		
Wheeld	hair Capacity: Chassis Mfr.:	Cr	Chassis Model:		Chassis Build Date:		
Chassis	s VIN:	Er	ng. Model:		Eng. S/N:		
Trans. Model: Trans. S/N		S/N:	N: Fue		ıel Type:		
Body M	fr.:	Body Model: Bod		Body S/I	ody S/N:		
In-servi	ce-date: Lift: Yes / No	Lift Mfr.:	Lift Model:		Lift S/N:		
In-servi	ce-mileage: A/C: Yes / No	A/C Mfr.:	Evap. S/N:		Comp. S/N:		
STAT	US CODES: $\sqrt{\ } = OK$ $X = Ma$	alfunction (but Meets Specs)	O = Does No	ot Meet Specs	N/A = Not Applicable		
Status Code	INS	PECTION ITEMS			COMMENTS (Note Specific Deficiencies)	Tech. Initials	
A. INSI	DE BUS			<u>-</u>	· · · · · · · · · · · · · · · · · · ·	_	
	1. Emergency Equipment - Fire Ext. (pressure/tag/mount), First A	Aid Kit, Body Fluid Cleanup Kit and Refl	ectors				
	2. Registration and Insurance Card						
	3. Neutral Safety Switch, Shifter and Noise Abatement Switch						
	4. Engine Controls - Key Switch, Accelerator and Engine Shutdo	wn					
	5. Gauges, Indicators, Dash and Switch Panel Lights, Engine	Warning Lights/ Buzzers and ABS Wa	arning Light				
	6. Air Brake System - Gauge(s), Build-Up, Governor, Park Brake	, Adjustment, Air Leaks, Low Air Warnin	ng, PP-1 Pop-Off and Pedal				
	7. Hydraulic Brakes - Warning Light, Gauge, Pedal Travel and Fa	ade, Power Assist and Park Brake					
	8. Windshield Wipers and Washers - Operation, Park and Blade	es					
	9. Heaters, Defrosters, Auxiliary Dash or Header Fan(s)						
	10. Dome and Step Well Lights						
	11. Service Door - Operation, Control and Overhead Pad						
	12. Horns	2:1 : 1 1 :					
	13. Mirror Adjustment and Condition - Rear vision, Cross-view, S 14. Driver's Seat and Seat Belt	Side-view and Interior					
		hing Cuttor					
	15. <b>Passenger Seats</b> - Frames, Mounting, Pads, Cuts, Bottoms, Modesty Panels, Stanchions, Passenger Securement Devices and Webbing Cu 16. <b>Emergency Doors, Windows, Hatches and Passenger Check System</b> Operation, Buzzers, Labeling and Overhead Pad						
	17. Windshield, Side and Rear Windows - Cracks, Fogging, Latel		y and Overnead Fau				
	18. Wheelchair Lift, Door and Securement System - (if equipped						
	19. Two-Way Radio Operation - (if equipped)	+					
	20. Interior Wiring, Cab Hoses and Fire Wall Seals						

	21. General Condition of Bus Interior - Floor, Step well, Grab Rail(s), Paneling, Broom Mounting, Loose Objects Secured and Engine Cover
B. OUT	SIDE BUS
	1. Headlights, Turn Signals, Hazard, Brake, Tail, Backup Lights, Backup Alarm and Park Lights
	2. Clearance, Side Marker, ID Lights, Reflectors and Strobe Light
	3. Pupil Warning Lights
	4. Stop Arm(s) and Student Crossing Arm - Wiring, Air or Vacuum Leak and Decal
	5. <b>General Condition of Bus Exterior -</b> Mirrors, Bumpers, Body Damage, Paint, Reflective Marking, Lettering, Emergency Door, Engine Hood and Cleanliness
C. ENG	NE COMPARTMENT
	1. Steering - Play, Column, Steering Gear Box Mounting, Pitman Arm, Drag Link, Steering Arm, Tie Rod & Ends and Idler Arm
	2. Batteries - Hold Down, Terminals, Cables, Cleanliness, Slide Tray and Load Test. Check battery voltage after 15 seconds load at ½ CCA.
	Bat1 Bat2 Bat 3
	3. Fluid Levels and Condition - Brake, Power Steering, Oil, Transmission, Windshield Washer, Coolant (Antifreeze°F) and DEF
	4. Belts and All Hoses - Tightness, Condition, Routing and Belt Alignment
	5. <b>Accessory Mounting and Condition –</b> Power Steering Pump, Air Compressor and Filter, Water Pump, Fan, Alternator and Air Cleaner (Restriction)(H <sub>2</sub> O)
	6. Wiring - Routing and Condition
	7. Fuel System and Lines
	8. Radiator - Mounting, Cap, Reservoir and Fan Shroud
	COMMENTS / NOTES

Status Code				COMMENTS (Note Specific Deficiencies)			Tech. Initials	
D. UNDERNEATH BUS								
	Shocks, Kingpins,	Wheel Bearings, Seals, A	s, Spring Mounts, Shackles, -Frames, Bushings and Ball	Joints				
	2. Front Brakes - Ho	oses, Lines, Chambers, Sla ers or Calipers. Check and	ack Adjusters, Push rods, Lir I Adjust MSA-Equipped Brak	nings, Drums, Rotors				
		Fransmission Mounts and	d Starter Mounting					
	4. Transmission - B	olts, Linkage, Lines, Filter	and Cooler					
	5. Fluid Leaks - Oil,	Coolant, Transmission, Po	ower Steering and DEF					
	6. Fuel and DEF Tar	nk - Leaks, Mounting, Hose	es and Wiring					
	7. Brake Equipment	t – ABS, Lines, Valves, Re	servoir Mounting and Bleed	Reservoirs				
	8. Driveline - Shafts	, U-Joints, Yokes, Hanger I	Bearings, Guards Driveshaft	and Park brake				
	9. Rear Suspension - Axle Housing, Vent, Differential, Springs, U-Bolts, Shocks, Spring Shackles, Pins and Bushings, Hangers, Seals and Wheel Bearings							
		ers or Calipers. Check and	ack Adjusters, Push rods, Lir I Adjust MSA-Equipped Brak					
	11.Body Securemen		wns, Floor, Outriggers, Brac	ces,				
	' '		Tailpipe and DEF, DPF Sys	stem				
			Damage, Matching, Alignme	ent				
	and Wheel Hardwa	are						
TIRES		LF	RF	RRO	RRI	LRO	LRI	
Tread	Depth	/32	/32	/32	/32	/32		/32
Air Pre	ssure	PSI	PSI	PSI	PSI	PSI		PSI
Lug Nı	ıt Torque	Ft lbs.	Ft lbs.	Ft lbs.		Ft lbs.		
Tire Se	rial Number							
				Lug Nut T	orque Verified			
				(o)		1		

E. FILTERS / COOLANT CONDITION / STARTING & CHARGING / AIR CONDITIONING PERFORMANC		
1. Check Oil Filter(s)		
2. Check Fuel Filter(s) Primary/Secondary and Separator		
3. Check Transmission Filter(s)		
4. Check Air Compressor Filter (if applicable)		
5. Check Power Steering Filter		
6. Check Engine Air Cleaner assembly and Filter		
7. Check Coolant Filter and record DCA level		
8. Test Starting and Charging System. AmpsVolts		
10.Air Conditioning Filters		
F. ROAD TEST		
1. Brake Performance - Park Brake, Stopping Distance and Equalization		
2. Engine, Transmission and Driveline - Engine Performance, Governor and Shifting		
3. Steering and Handling -Free Play, Power Assist, Column, Tracking and Turning Radius		
G. ITEM SPECIFICATIONS		
1. Body Data Plate		
2. Body Structure		
3. A/C Equipment		
4. Wheel Chair Lift Equipment		
5. Wheel Chair Tie-Down and Securement System		
6. Driver's Document Compartment		
7. Publications		
8. Engine Equipment		
9. Engine Performance		
10. Ventilation		
11. Square and Level - (RF) (LF) (RR) (LR)		
H. OPTIONAL EQUIPMENT		
1. Type A Chassis Options		
2. Type B, C and D Chassis Options		
3. Type A, B, C and D Body Exceptions and Options		
Body Inspector's Signature: Certification N	umber: Date:	
Chassis Inspector's Signature: Certification No	umber: Date:	

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 11 - FLORIDA SCHOOL BUS SPECIFICATIONS, EFFECTIVE JANUARY 2023

## BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 12 – FMVSS AND GAWR LETTER OF ATTESTATION

## BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 13 – POWER LIFT COMPLIANCE LETTER OF ATTESTATION

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 14 – CHASSIS DELIVERY DATES LETTER

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 15 – LIQUIDATED DAMAGES ACKNOWLEDGEMENT LETTER

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 16 – SEAT COVERING SPECIFICATIONS LETTER OF ATTESTATION

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 17 – CHASSIS PERFORMANCE LETTER OF ATTESTATION

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 18 – PRE-DELIVERY PROGRAM OUTLINE

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT ATTACHMENT 19 – BID ADDENDA (IF ANY)

[PLACE HOLDER FOR BID ADDENDA]

## ATTACHMENT 20 – STATE OF FLORIDA, DEPARTMENT OF EDUCATION ATTACHMENT C STANDARD TERMS AND CONDITIONS

Pursuant to S. 287.058(1), Florida Statutes ("F.S."):

- A. Bills for fees or other compensation for services or expenses shall be submitted in detail sufficient for a proper preaudit and postaudit thereof.
- B. Travel expenses will be reimbursed only if expressly authorized by the terms of the Contract. Bills for any travel expenses shall be submitted in accordance with s. 112.061, F.S.
- C. The Department may unilaterally cancel this Contract if the Contractor refuses to allow access by members of the public to all documents, papers, letters and materials made or received in conjunction with the Contract that are subject to Chapter 119, F.S., and are not exempt from public inspection by s 119.071, F.S., or by other provisions of general or special law.
- D. The Deliverables specified in the Contract must be received and accepted in writing by the Department's Contract Manager before Contractor is entitled to payment.
- E. To complete this Contract, all services must be performed and/or goods received on or before the date(s) specified in the Contract.
- F. If this Contract is expressly renewable, it may be renewed for a period that may not exceed three years or the term of the original contract, whichever is longer. The renewal price for the contracted service is set forth in the bid, proposal, reply. Cost for renewal shall not be changed. Renewals shall be contingent on satisfactory performance evaluations by the Department and subject to the availability of funds. Exceptional purchase contracts pursuant to s. 287.057(3)(a) and (c), F.S., may not be renewed.
- II. In fulfilling its obligations under this Contract and Chapter 119, F.S., Contractor must comply with the requirements outlined in s. 119.0701, F.S. If Contractor fails to comply with a public records request pursuant to Chapter 119, F.S., the Department may take any action under this Contract necessary to ensure compliance with Florida's public records laws, including, but not limited to, demanding compliance with a public records request, seeking indemnification from Contractor regarding an action brought to enforce a public records request sent to Contractor, or terminating the Contract. Pursuant to s. 119.0701, F.S., Contractor must:
  - A. Keep and maintain public records required by the Department to perform the service;
  - B. Upon request from the Department's custodian of public records, provide the Department with a copy of the requested records or allow the records to be inspected or copied within a reasonable time at a cost that does not exceed the cost provided in chapter 119, F.S., or as otherwise provided by law;
  - C. Ensure that public records that are exempt or confidential and exempt from public records disclosure requirements are not disclosed except as authorized by law for the duration of the Contract term and following completion of the Contract if the Contractor does not transfer the records to the Department; and
  - D. Upon completion of the Contract, transfer, at no cost, to the Department all public records in possession of the Contractor or keep and maintain public records required by the Department to perform the service. If the Contractor transfers all public records to the Department upon completion of the Contract, the Contractor shall destroy any duplicate public records that are exempt or confidential and exempt from public records disclosure requirements. If the Contractor keeps and maintains public records upon completion of the Contract, the Contractor shall meet all applicable requirements for retaining public records. All records stored electronically must be provided to the Department, upon request from the Department's custodian of public records, in a format that is compatible with the information technology systems of the Department.

IF THE CONTRACTOR HAS QUESTIONS REGARDING THE APPLICATION OF CHAPTER 119, FLORIDA STATUTES, TO THE CONTRACTOR'S DUTY TO PROVIDE PUBLIC RECORDS RELATING TO THIS CONTRACT, CONTACT THE CUSTODIAN OF PUBLIC RECORDS AT 850-245-0735 & contractcustodian@fldoe.org, Florida Department of Education, Attn: Contract Custodian 325 W. Gaines Street, Suite 344, Tallahassee, FL 32399-0400.

III. The Contractor shall prepare an invoice for the amount due and mail it to the Department of Education Comptroller after having delivered the products and services required under this Contract to the Contract Manager. The invoice shall set forth details sufficient for a proper pre-audit and post-audit including, where applicable, the products and services delivered and completion dates. Upon receipt of the invoice, the Department of Education Comptroller will request confirmation from the Contract Manager that the delivered products and services are satisfactory and payment is due. If for any reason they are not satisfactory, payment will be withheld until the unsatisfactory condition or conditions are corrected. Upon receipt of the Contract Manager's approval, the Department of Education Comptroller shall process each invoice in accordance with the provisions of s. 215.422, F.S.

- A. Contractor agrees to submit invoice within thirty (30) days of the Department's acceptance of deliverables. It is understood that should Contractor fail to submit invoice within thirty (30) days following the Department's acceptance of the deliverables, the Department shall not be responsible for payment thereof under this contract or quantum meruit.
- IV. Section 215.422, F.S., provides that agencies have five (5) working days to inspect and approve goods and services, unless bid specifications or the Contract specifies otherwise. With the exception of payments to health care providers for hospital, medical, or other health care services, if payment is not available within forty (40) days, measured from the latter of the date the invoice is received or the goods or services are received, inspected and approved, a separate interest penalty set by the Comptroller pursuant to s. 55.03, F.S., will be due and payable in addition to the invoice amount. To obtain the applicable interest rate, please contact the Department's Fiscal s. at 850/245-0401 or Purchasing Office at 850/245-0483. Payments to health care providers for hospitals, medical, or other health care services, shall be made not more than thirty-five (35) days from the date of eligibility for payment is determined, and the daily interest rate is .02740 percent. Invoices returned to a vendor due to preparation errors will result in a payment delay. Invoice payment requirements do not start until a properly completed invoice is provided to the agency. A Vendor Ombudsman, whose duties include acting as an advocate for vendors who may be experiencing problems in obtaining timely payment(s) from a State Agency, may be contacted at 866/352-3776 or by calling the Chief Financial Officer's Hotline, 800/342-2762.
- V. As used in this Contract, the term "Deliverable" refers to tangible "commodities", as defined in s. 287.012(5), F.S., which the Contractor provides pursuant to the Contract and to reports or other tangible or documentary evidence which demonstrate that the Contractor has performed the services required by the Contract. The following provisions govern Deliverables, as applicable:
  - A. Each Deliverable must be physically delivered to the Department's Contract Manager, or to a person designated by the Contact Manager. If delivery is made to a designee, the Contractor shall give written notice to the Contract Manager of the delivery. A Deliverable is not received until the Contract Manager has physical control of deliveries or has written notice that the designee has physical control.
  - B. In each case in which the approval of a Deliverable is dependent upon tests being conducted by the Department or Contractor, independently or jointly, the Department's inspection and approval of the Deliverable shall not be subject to the five (5) day provision in s. 215.422, F.S., but shall be governed by the terms and conditions of the acceptance testing plan as stated in Attachment A, until approved in accordance with the plan.
  - C. In each case of a Deliverable of information technology, as defined at s. 287.012(14), F.S., unless specified otherwise in Attachment A, the acceptance testing plan is deemed to include as a minimum the reliable performance of the information technology in accordance with its design specifications in:
    - 1. a test environment that simulates the production environment as much as is reasonably possible; and
    - 2. the production environment for which it is intended for a period of time sufficient for the information technology to have experienced the major foreseeable exigencies of the production functions.
  - D. The Department's inspection, including testing when applicable, shall determine whether or not the Deliverables appear to be in compliance with the Contract. The Contractor shall be notified in writing of any apparent deficiency. The written notice shall detail the specific action required by the Contractor to correct the deficiency. The Contractor shall timely correct such deficiency and resubmit the deliverable for acceptance.
- VI. The Contractor represents and agrees that information submitted in support of its requests for payment is the basis of payment and is true and accurate to the best of knowledge of the responsible signatory. A violation of this provision shall subject the violator to the provisions of s. 68.082, F.S., pertaining to false claims against the State, and/or s. 837.06, F.S., pertaining to false official statements.

  VII. This paragraph applies if this Contract expires in a fiscal year subsequent to the fiscal year in which the Contract is entered. The
  - State of Florida's fiscal year comprises July 1 through June 30. The Department's and State of Florida's performance and obligation to pay under this Contract is contingent upon an annual appropriation by the Legislature.
- VIII. Notwithstanding anything to the contrary contained in a State Term Contract, Contractor warrants that all commodities, as defined in s. 287.012, F.S., shall meet the specifications of the Contract and shall be merchantable and fit for the particular purposes intended by the Contract.
- IX. The Contractor further warrants that as to each Deliverable produced pursuant to this Contract, Contractor's production of the Deliverable, and the Department's use of the Deliverable, will not infringe on the copyrights of any third party. This provision applies to each work of authorship in which copyrights subsist pursuant to 17 U.S.C. Sections 102-105 and to each exclusive right established in 17 U.S.C. Section 106. In furtherance of this provision the Contractor additionally warrants that:
  - A. As to each work of software or other "information technology", as defined in s. 287.012(15), F.S., in which copyrights subsist, the Contractor has acquired the rights by conveyance or license to any third party software or other information technology, which was used to produce the Deliverable;
  - B. As to each image and sound recording incorporated into a Deliverable, the Contractor has acquired the necessary rights, releases, and waivers from the person whose image or sound is included, or from the holder of the copyrights subsisting in the literary, musical, dramatic, pantomime, choreographic, pictorial, graphic, sculptural, motion pictures, audiovisual work or sound recording from which the included image or sound recording was taken.
- X. The Contractor further warrants that the Contractor shall not disclose to any third party, without the express, prior, written approval of the Department, any personally identifiable information about any student. This applies to information which came from any record or report of a Florida public education institution or from any education record which is subject to the Family Educational Rights and Privacy Act, 20 U.S.C. Section 1232g. The terms "record a report" and "student" shall have the meanings prescribed in s. 1002.22(2)(c) and (d), F.S. The term "educational record" shall have the meaning prescribed in 20 U.S.C. Section 1232g(a)(4).

- In the event that the Governor and Cabinet are required to impose a mandatory reserve on appropriations, the Department shall amend this Contract to place in reserve the amount determined by the Department of Education to be necessary because of the mandatory reserve. Such amendments may provide for adjustments in the Deliverable products and services as may be necessary.
   Intellectual property is subject to following additional provisions:
  - A. Anything by whatsoever designation it may be known, that is produced by, or developed in connection with, this Contract shall become the exclusive property of the of the State of Florida and may be copyrighted, patented, or otherwise restricted as provided by Florida or federal law. Neither the Contractor nor any individual employed under this Contract shall have any proprietary interest in the product.
  - B. With respect to each Deliverable that constitutes a work of authorship within the subject matter and scope of U.S. Copyright Law, 17 U.S.C. Sections 102-105, such work shall be a "work for hire" as defined in 17 U.S.C. Section 101 and all copyrights subsisting in such work for hire shall be owned exclusively by the Department pursuant to s. 1006.39, F.S., on behalf the State of Florida
  - C. In the event it is determined as a matter of law that any such work is not a "work for hire", Contractor shall immediately assign to the Department all copyrights subsisting therein for the consideration set forth in the Contract and with no additional compensation.
  - D. The foregoing shall not apply to any preexisting software, or other work of authorship used by Contractor, to create a Deliverable but which exists as a work independently of the Deliverable, unless the preexisting software or work was developed by Contractor pursuant to a previous Contract with the Department or a purchase by the Department under a State Term Contract.
  - E. The Department shall have full and complete ownership of all software developed pursuant to the Contract including without limitation:
    - 1. The written source code;
    - 2. The source code files;
    - 3. The executable code:
    - 4. The executable code files;
    - 5. The data dictionary:
    - 6. The data flow diagram;
    - 7. The work flow diagram;
    - 8. The entity relationship diagram; and
    - 9. All other documentation needed to enable the Department to support, recreate, revise, repair, or otherwise make use of the software.
- XIII. The Department reserves the right, at its option, to issue a change order to delete work tasks reducing the total Contract amount by up to 10%. An addition of work tasks within the scope of the Contract, an increase in the total Contract amount, or a decrease of more than 10% of the total Contract amount, shall be implemented only by a Contract amendment signed by both the Department and the Contractor.
- XIV. Pursuant to s. 216.347, F.S., no funds awarded under this Contract may be used for the purpose of lobbying the Legislature, the judicial branch, or a State agency.
- XV. The Contractor understands that s. 20.055, F.S., requires every contractor and subcontractor to cooperate with the Department's Inspector General in any investigation, audit, inspection, review, or hearing; and the Contractor shall comply with this requirement. The Contractor shall grant access to all records pertaining to the Contract to the Department's Inspector General, General Counsel and other agency representatives, the State Auditor General, the Office of Program Policy and Government Accountability, and the Chief Financial Officer.
- XVI. The Contractor agrees to permit onsite visits by designated Department employees or agents to conduct audits to ensure compliance with Section 20.055, Florida Statutes. These audits may require Department access to records and data, computers and communications devices, and other materials whether owned or operated by the Contractor. Access may include, but is not limited to, user level and/or system level access to any computing or communications device; access to information (electronic, hardcopy, etc.) that may be produced, transmitted or stored on the Contractor's equipment or premises; access to work areas; and access to interactively monitor and log traffic on the Contractor's networks.
- XVII. The Contractor must carry general liability insurance, which shall include errors and omissions coverage. The amount of coverage shall be a minimum of \$1,000,000 or the aggregate total of all contractual agreements between the Contractor and the agencies and political subdivisions of the State of Florida, whichever is greater. The Contractor shall add the Department as an additional insured on the general liability coverage. The insurance shall cover all of the Contractor's operations under this Contract and shall be effective throughout the Term of this Contract, as well as any renewals or extensions thereto. It is not the intent of this Contract to limit the types of insurance otherwise required by this Contract or that the Contractor may desire to obtain or be required to obtain by law. The Contractor must submit a Certificate of Insurance indicating coverage for general liability purposes and additional insured coverage, and shall maintain and pay for same throughout the Term of this Contract. A Certificate of Insurance indicating adequate coverage shall be submitted to the Department prior to the time the Contract is entered. Any and all insurance policies shall be through insurers qualified to do business in Florida.
  - XVIII. The Contractor agrees to provide the Department upon execution of this Contract with a performance bond or other security deposited with the Department in the total amount of the Contract or another amount if specified in the procurement specifications or Attachment A, guaranteeing that the Contractor will perform all work according to this Contract, within the time and price specified in the Contract. A performance bond shall be issued from a surety company, qualified to do business in Florida.

- XIX. The Contractor may not assign or subcontract all or any portion of this Contract without the advance written consent of the Department.

  XX. In all cases in which the Contractor, with the advance written consent of the Department, assigns or subcontracts, all or any portion of the Contract:
  - A. The Contractor shall monitor the subcontractor or assignee and establish controls to avoid or mitigate risks identified by the Department or the Contractor; and
  - B. The Contractor shall allow the Department to monitor subcontractor or assignee activity and compliance, and the Contractor shall require the subcontractor or assignee to promptly submit to the Department, at the Department's request, complete and accurate documentation pertaining to the subcontract or the Contract.
- XXI. The Contractor shall coordinate with and assist the Department's Contract Manager in the performance of the latter's responsibilities, which include without limitation:
  - A. Monitoring the activities of the Contractor;
  - Receiving and reviewing the reports of the Contractor to determine whether the objectives of the Contract are being accomplished;
  - C. Receiving and reviewing the invoices for payment of funds to assure that the requirements of the Contract have been met and that payment is appropriate;
  - D. Evaluating the process used by the Contractor to monitor the activities of any subcontractor or assignee; and
  - E. Accessing, directly, the subcontractors and assignees, as the Contract Manager deems necessary.
- XXII. This Contract may not be modified unless in writing signed by the Department and the Contractor.
- XXIII. The Department and the Contractor waive application of the principle of contract construction that ambiguities are to be construed against a contract's drafter, and agree that this Contract is their joint product.
- XXIV. The Department and the Contractor acknowledge that they have had their respective attorneys review and approve this Contract or that they have had the opportunity to do so.
- XXV. This Contract shall be governed by the laws of the State of Florida, and venue for purposes of any action brought to enforce or construe the Contract shall lie in Leon County, Florida.
- XXVI. Failure of the Department to declare any default immediately upon the occurrence or knowledge thereof, or delay in taking any action in connection therewith, does not waive such default. The Department shall have the right to declare any such default at any time and take such action as might be lawful or authorized under the Contract, at law, or in equity. No Department waiver of any term, provision, condition or covenant of the Contract shall be deemed to imply or constitute a further Department waiver of any other term, provision, condition or covenant of the Contract, and no payment by the Department shall be deemed a waiver of any default under the Contract.
- XXVII. Time is of the essence with regard to each and every obligation of the Contractor contained in the Contract. Each such obligation is deemed material, and a breach of any such obligation (including a breach resulting from the untimely performance thereof) shall constitute a material breach.
- XXVIII. The Contractor shall indemnify and hold harmless the Department, its attorneys, agents and employees, from and against any and all third party claims, suits, debts, damages, and causes of action, whatsoever, whether arising in law or in equity, arising out of or relating to Contractor performance or failure to perform under this Contract. The indemnification shall include reasonable attorney fees and costs incurred by the Department, its attorneys, agents and employees, in the defense of any such claim, suits or causes of action, as aforesaid.
- XXIX. This Contract may be cancelled by written agreement of the Department and the Contractor specifically referencing this Contract. Such agreement shall specify the remaining measures necessary to be taken by each party.
- XXX. The Department reserves the right to cancel this contract without cause by giving the Contractor thirty (30) days written notice.
- XXXI. Should Contractor fail to perform to Contract terms and conditions, Contractor shall be notified in writing, stating the nature of the failure to perform and providing a time certain (which shall be not less than ten (10) days following receipt of such notice) for correcting the failure. Such failure to perform shall otherwise be dealt within accordance with Rule 60A-1.006, F.A.C.
- XXXII. A person or affiliate who has been placed on the convicted vendor list following a conviction for a public entity crime may not submit a bid on a contract to provide any goods or services to a public entity, may not submit a bid on a contract with a public entity for the construction or repair of a public building or public work, may not submit bids on leases of real property to a public entity, may not be awarded or perform work as a contractor, supplier, subcontractor, or consultant under a contract with any public entity, and may not transact business with any public entity in excess of the threshold amount provided in s. 287.017, F.S., for CATEGORY TWO for a period of thirty-six (36) months from the date of being placed on the convicted vendor list.
- XXXIII. The employment of unauthorized aliens by any contractor is considered a violation of Section 274A(e) of the Immigration and Nationality Act. If the contractor knowingly employs unauthorized aliens, such violation shall be cause for unilateral cancellation of the contract. In addition, pursuant to State of Florida Executive Order No. 11-116, Contractor shall utilize the U.S. Department of Homeland Security's E-Verify system to verify the employment of all new employees hired by the Contractor during the contract term. Also, Contractor shall include in related subcontracts a requirement that subcontractors performing work or providing services pursuant to the Contract utilize the E-Verify system to verify employment of all new employees hired by the subcontractor during the contract term. XXXIV. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion Lower Tier Covered Transactions
  - A. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

B. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal. The Department may cancel this contract if an attached explanation is not acceptable to the Department or the Federal government.

#### XXXV. MyFloridaMarketPlace

- A. MyFloridaMarketplace Vendor Registration
  - Each Vendor doing business with the State of Florida for the sale of commodities or contractual services as defined in section 287.012, Florida Statutes, shall register in MyFloridaMarketPlace, in compliance with Rule 60A-1.031, Florida Administrative Code, unless exempt under Rule 60A-1.031(3) Florida Administrative Code.
- B. MyFloridaMarketplace Transaction Fee
  - The State of Florida, through the Department of Management Services, has instituted MyFloridaMarketPlace, a statewide eProcurement system. Pursuant to section 287.057(22), Florida Statutes, all payments for commodities and/or contractual services as defined in Section 287.012, Florida Statutes, shall be assessed a Transaction Fee which the Vendor shall pay to the State, unless exempt under Rule 60A-1.031, Florida Administrative Code. Notwithstanding the provisions of Rule 60A-1.031, et seq., the assessment of a transaction fee shall be contingent upon Federal approval of the transaction fee assessment program and continued payment of applicable federal matching funds.

For payments within the State accounting system (FLAIR or its successor), the Transaction Fee shall, when possible, be automatically deducted from payments to the Vendor. If automatic deduction is not possible, the Vendor shall pay the Transaction Fee pursuant to Rule 60A-1.031(2), Florida Administrative Code. By submission of these reports and corresponding payments, Vendor certifies their correctness. All such reports and payments shall be subject to audit by the State or its designee. The Vendor shall receive a credit for any Transaction Fee paid by the Vendor for the purchase of any item(s) if such item(s) are returned to the Vendor through no fault, act, or omission of the Vendor. Notwithstanding the foregoing, a Transaction Fee is non-refundable when an item is rejected or returned, or declined, due to the Vendor's failure to perform or comply with specifications or requirements of the agreement.

Failure to comply with these requirements shall constitute grounds for declaring the Vendor in default and recovering reprocurement costs from the Vendor in addition to all outstanding fees. VENDORS DELINQUENT IN PAYING TRANSACTION FEES MAY BE EXCLUDED FROM CONDUCTING FUTURE BUSINESS WITH THE STATE.

- XXXVI. The Contractor shall comply with all applicable Federal, State and County laws, ordinances, rules, and regulations applicable to the Contractor and applicable to its performance under this Contract.
- XXXVII. Contractors, providers, and partners employed by the Department or acting on behalf of the Department shall comply with Florida Administrative Code (F.A.C.), and fully comply with all information technology security policies. Contractors, providers, and partners employed by the Department or acting on behalf of the Department shall also fully comply with 60GG-2 Information Technology Standards.
- XXXVIII. If this Contract is for goods or services over \$1,000,000, this Contract may be terminated at the option of the Department if the Contractor is found to have submitted a false certification as provided under subsection 287.135(5), F.S., been placed on the Scrutinized Companies with Activities in Sudan List or the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List, or been engaged in business operations in Cuba or Syria.
- XXXIX. This Contract may be executed in multiple counterparts, each of which shall be deemed to be an original and all of which shall constitute one contract, notwithstanding that all parties are not signatories to the original or the same counterpart, or that signature pages from different counterparts are combined, and the signature of any party to any counterpart shall be deemed to be a signature too and may be appended to any other counterpart.
- XXXX. In accordance with Executive Order 20-44, each contractor meeting the following criteria: 1) all entities named in statute with which the agency must form a sole source, public private agreement and 2) all entities that, through contract or other agreement with the State, annually receive 50% or more of their budget from the State or from a combination of State and Federal funds shall provide to the department an annual report in the format required by the department. This report shall detail the total compensation for the entities' executive leadership teams. Total compensation shall include salary, bonuses, cashed in leave, cash equivalents, severance pay, retirement benefits, deferred compensation, real-property gifts, and any other payout. In addition, the grantee shall submit with the annual report the most recent Return of Organization Exempt From Income Tax, Form 990, if applicable, or shall indicate that the contractor is not required to file such Form 990. Contracted entities must inform the Department of any changes in total executive compensation between the annual reports. All compensation reports must indicate what percent of compensation comes directly from the State or Federal allocations to the contracted entity. This report shall be submitted by March 1 of each year. Executive Order 20-44 may be obtained via this link, https://www.flgov.com/wp-content/uploads/orders/2020/EO 20-44.pdf

# BID NO: ITB 2023-02 TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT BID RESPONSE CHECKLIST

### (DOES NOT NEED TO BE RETURNED WITH YOUR BID RESPONSE)

This checklist is provided as a **guideline only** to assist Vendors in the preparation of their Bid Response. Included are some important matters that the Bidder should check. This checklist is just a guideline and is not intended to have all issues required by the ITB. Bidders are responsible for reading and complying with the ITB in its entirety.

Check	off each the following:
	1. The Deliverables have been thoroughly reviewed for compliance with the Bid requirements.
	2. The DMS Vendor Information Portal web-site - <a href="https://vendor.myfloridamarketplace.com/">https://vendor.myfloridamarketplace.com/</a> has been checked and any Addenda(s) posted have been completed, signed, and included in the Bid Response
	3. Price(s) bid has been reviewed for accuracy, and any price corrections have been initialed in ink
	4. The "Transmittal Letter" has been completed on company letterhead, signed, and enclosed in the Bid Response.
	5. The "Disclosure Statement" has been read, completed, and enclosed in the Bid Response.
	6. The "Minority Business Enterprise (MBE) Certification" has been attached, if applicable
	7. The "Scrutinized Companies Lists" has been completed, signed, and enclosed in the Bid Response, if applicable
	8. All documents required under Section 7.2 have been reviewed or completed and are enclosed in the Bid Response, if applicable
	9. The following information has been written on the Lower Left Hand Corner of the Envelope transmitting your Bid Response:
	BID NO.: <u>ITB 2023-02</u>
	TITLE: TYPES A, C AND D SCHOOL BUSES AND OPTIONAL EQUIPMENT
	DUE DATE & TIME: October 10, 2022 @ 0:15 EASTERN TIME